


T 12 S R 10 E M W. 1

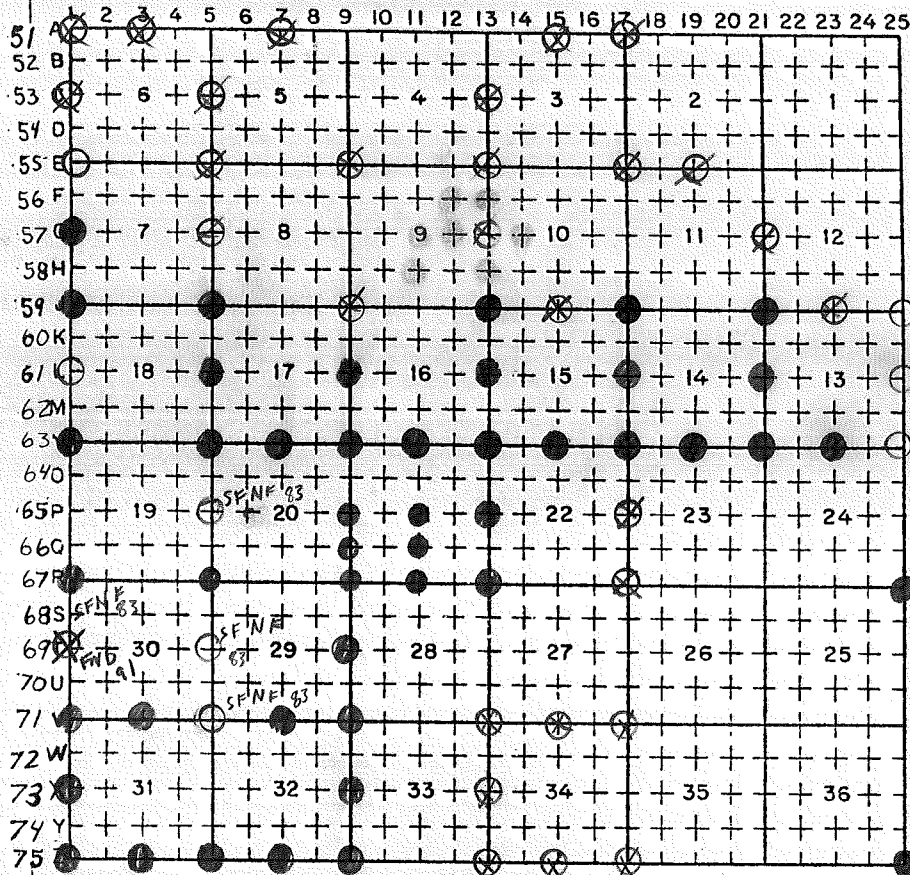

LEGEND

○ = Corner having information on form 5680-2 in this file.

FILING INSTRUCTION

File 5680-2 card record by letter and number coordinates behind the file guide for the township in which it falls.

File the 5680-2 card record by letter and then by number i.e., all A cards first, then B cards etc.

The first card behind the file guide (if data have been obtained and recorded) will be card A-1 for N.W. Township Corner, then card A-2 for 1/16 corner then card A-3 for 1/4 corner etc.

Index
File No. A1
T 12S., R. 10E.,
Merid. Will

CORNER RECORD (SEARCH)


Tract or
Survey No. _____

Cor.
No. A-1

R.D. SISTERS County JEFFERSON
N.F. DESCHUTES State OREGON

SEC COR

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

T11S, R9E, 2-25 ⇒ NOTES
SEE: T12S, R9E, A-25

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature

Title

Division

Headquarters

Date

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By. _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

REMARKS

12

Index File No. T. R. M. Tract or Surv. No. Cor. *A-01*

13

Index

File No.

T 12 S. R. 10 E. R.D. SISTERS County JEFFERSON Cor. No. A-03
Merid. WILLAMETTE N.F. DESCHUTES State OREGON S/A Cor Sec 3/
N/A Cor Sec 6

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No.

SEE: I-03

T11S R10E

EV. FD.

A-03

Index
File No. A 7
T 12S., R. 10E.,
Merid. Will

CORNER RECORD (SEARCH)


Tract or
Survey No. _____

Cor.
No. A-7

R.D. SISTERS County JEFFERSON
N.F. DESCHUTES State OREGON

N 1/4 Cor Sec 5
3/4 Cor Sec 32

CORNER DIAGRAM

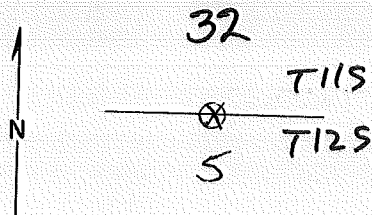

DESCRIBE CORNER MONUMENT FOUND

SEE: Z-7, T11S, RIDE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature

Title

Division

Headquarters

Date

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No. T. R. M. , Tract or Surv. No. Cor, **A-07** 13

Index

File No.

T 12 S. R. 10 E. R.D. SISTERS County JEFFERSON
Merid. WILLAMETTE N.F. DESCHUTES State OREGON

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No.

A-15

N/4 Sec 3

S/4 Sec 34

SEE: Z-15

T11S R10E

EV. 10.

A-15

Index

File No.

12 S. R. 10 E.

R.D.

SISTERS

County

JEFFERSON

Merid.

WILLAMETTE

N.F.

DESCHUTES

State

OREGON

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No.

A-17

NW 1/4 Sec 2

SEC 34

SEE: Z-17

THIS R10E

EV. FD.

A-17

Index
File No. C 1
T 12S. R. 10E.
Merid. W-M.


CORNER RECORD (SEARCH)

Tract or
Survey No. _____

Cor.
No. C-1
1/4 Cor

R.D. SISTERS County JEFFERSON
N.F. DESCHUTES State OREGON

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

SEE: C-25, T12S, R9E

EV. F.D.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature

Title

Division

Headquarters

Date

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By. _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor.

C-1

12

13


Index
File No. C5
T 12S., R. 10E.,
Merid. Will

CORNER RECORD (SEARCH)

Tract or
Survey No. _____
Cor.
No. C-5
W/4 Co. R. S. 5

R.D. SISTERS County JEFFERSON
N.F. DESCHUTES State OREGON

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Rock 18"x16"x12" marked 1/4 on west face

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Juniper B.T., N56°E, 40ft
" " , S75°W, 80 ft.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Best way to find corner is from Sec. Line Board on Rd #1140

Signature

Leon Furnish

Title

Dist Engr.

Division

Headquarters

Date

5-23-62

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By. _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No. T. R. M. Tract or Surv. No. Cor. *C-5* 13

Index
File No. _____

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)


Treaty or
Survey No. _____

Cor.
No. C-13

T. 12S R. 10E R.D. SISTERS County JEFFERSON W. 1/4 CORNER

Merid. WILL N.F. DESCHUTES State OREGON S. 3

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

NONE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

2 BT'S FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature

C.M. BEIL

Title

FORESTER

Division

Headquarters

Date


SEPT 1950

7100-52 (3 68)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By: _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No. T. R. M. Tract or Surv. No. Cor. *C-13*

Index
File No. 0155

CORNER RECORD (SEARCH)

Contract or

Cor.
No. E-01

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey N^o. BLM-1000

Jefferson

NW

Cor. of


Merid. Willamette

N.F. Deschutes

County
State Oregon

Section 7

CORNER DIAGRAM per legend

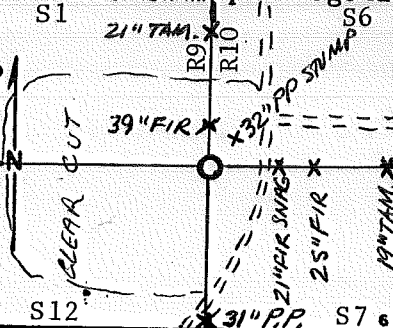

DESCRIBE CORNER MONUMENT FOUND

SFNF, but ft. of snow on 11-23-82 by SC & ST

SF/NF, REO 8/83

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No.

Filed At.

Object Ident.

Ident. By

Signature

CORNER LEGEND:

FS or Unverified
Contr. Other
☐ Searched For/Not Found

☒ Evidence Found/Accept.

☒ Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Heavy cat work and clear cut

Area west 94' from location marker on east side of

Road 1140 (old 1139); found various trees with possible
line marks, see diagram, REO 8/83

Searched By: R. Qman

Title PLS

Division

CS

Headquarters


SO

Date

7/83

CORNER RECORD (PERPETUATION)

MONUMENT STAMPED



MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____ or Agency _____

Plat or Cor. Record Prepared? ☒ Yes ☐ No Filed At: _____ Co. Surveyor's Office Date _____

History Trap Stone 20x18x16, B15" MKD 1 notch N., 5 notches S.


of (59L)	22" PN25W 38 ⁹	18" P N40E 51 ⁵ (78L)	1962: Laing Fd. Stone & 2 BT's
Surveys,	14" PS77W 21 ¹	22" P S56E 19 ¹ (29L)	16" PP NE, Scr. Vis., Rotting
G.L.O.,	(32L)		18" PP NW, Scr. Vis., Rotting
etc.			94 ft. W. of Rd. 1137

Index File No. Q155 T. 12 S., R. 10 E., W.M. Contract or Surv. No. BLM 1000 Cor. E-01

Index
File No. ES

T 12S., R. 10E., S.D. SISTERS County JEFFERSON Cor. No. E-5
Merid. Will N.F. DESCHUTES State OREGON Sec COR

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Assumed pile of stones as cor.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

*B.T. 40" down and rotting P. Pine marked T12S, R10E, Sec 8
Bearing S24°W a dist. of 12 ft. from corner
30" W. Fir bears S55°E, 8 ft. dist., marked T12S, R10E, Sec 7 BT*

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature
C.M. Laing

Title
Survey Tech

Division

Headquarters

Date

7-26-62

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor.

25

13

Index
File No. E 9

CORNER RECORD (SEARCH)


Tract or
Survey No. _____

Cor.
No. E-9

T 12S. R. 10E. R.D. SISTERS County JEFFERSON SEC COR

Merid. Will N.F. DESCHUTES State OREGON

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Found rock extending 4" above ground in good condition
rock also has notches on it

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Found 2 B.T.s standing

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

Title

Division

Headquarters

Date

7100-52

U.S.G.S.

12-1-61

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor.

E-9

13

Index
File No. E 13
T 12S., R. 10E.,
Merid. Will

CORNER RECORD (SEARCH)

Tract or
Survey No. _____
Cor. No. E-13
R.D. SISTERS County JEFFERSON Sec Cor
N.F. DESCHUTES State OREGON

CORNER DIAGRAM

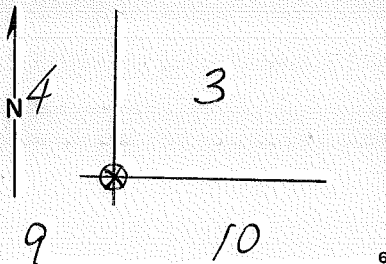


PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

DESCRIBE CORNER MONUMENT FOUND

No evidence

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

*2 B-Ts found
1 Standing Snag
1 Down Snag
Area has been bulldozed*

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature

Title

Division

Headquarters

Date

U-S-G-S

12-1-61

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By. _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.


Cor. *E-13* 13

Index
File No. E 17

T 12S., R. 10E., R.D. SISTERS County JEFFERSON Tract or Survey No. _____ Cor. No. E-17

Merid. Will N.F. DESCHUTES State OREGON SEC COR

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Notched rock in fair condition

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

2 B.T.s
1 Stump or snag
1 down snag

PHOTO IDENTIFICATION DATA

Photo No. ESF 6-15-67
Line 4 exp. 102
Filed At. S.O. + D-5 Files
Object Ident. _____
Ident. By Pinpoint
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Found: STONE, 6" diam. +; 1 Ft. above ground,
In good condition, No markings Noted.

1 BT - Large Pine
Photo Identification

7/28/70 PH Shoemaker Forester

Signature D.W.R. Title _____ Division _____ Headquarters U.S.G.S Date 12-1-61 7100-52 REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. E-17 13


Index
File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or
Survey No. _____Cor.
No. E-19T 12.5 R. 10ER.D. SISTERSCounty JEFFERSONS 1/4 COR 5.2Merid. Will.N.F. DESCHUTESState OREGON

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

1 BT FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

C.M. BEIL

Title

FORESTER

Division

Headquarters

Date


3-7-51

7100-52 (3 68)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____
Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. 19

12

13

Index

File No. 0157-1210-2

CORNER RECORD (SEARCH) Contract or

BLM

(Ref. FSM 7151.4)

Survey No.

1000

Cor.

G-01

T 12 S. R. 10 E. R.D. SistersCounty Jefferson

W/4

Cor. of

Merid. WillametteN.F. DeschutesState Oregon

Section

7

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

FD. Unmkd. Stone 13x10x7 in location

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

14" PP, 6' stump, S20° W 4', mkd 1/4 S, healed ~~TOE~~ blaze

Nothing in NE location

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Heavily logged

Placed ATTN. sign on stump

± 50 ft. W. of CL of Road 1140

CORNER LEGEND:

FS or Unverified
Contr. Other

○ ◇ Searched For/Not Found

⊗ ⊗ Evidence Found/Accept.

● ◆ Permanent Mon. Set/Fd.

Searched By: S.C.

Title S.T.

Division

CS

Headquarters

SO

Date 11-23-82

CORNER RECORD (PERPETUATION)


MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 5" in a mound of stone.

Pipe canted slightly west due a deep root.

Buried stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

7" PP Brs, N 12° E 64 6/8 ft. mkd. 1/4 S BT

5" PP Brs, S 12° W 74 1/8 ft. mkd. X BT

Work Done By R. Oman Title PLS Date 7-83 State Registration No. OR.702 or Agency

Plat. of Cor. Record Prepared ? Yes ☒ No Filed At: BLM ~~BLM~~ BLM Office Date 1/84

History of Surveys, G.L.O., etc.	Trap		
	Stone	15 x 14 x 9 10" mkd. 1/4 W. Face	1962: Laing FD. Stone & 2 BT's
		12" F N35E 13 2/3 (20L)	S.12 = 14" PP mkd. 1/4 S
			S.7 = 14" WF scr. illegible
	16" P S20W		+ 67' W. of Road 1137
	4 0/8 (6L)		

Index File No. 0157 T.12 S., R. 10 E., W.M.

Contract or Surv. No. BLM
1000


Cor. G-01

Index
File No. G-5
T 12S., R. 10E.,
Merid. Will

CORNER RECORD (SEARCH)

Tract or
Survey No. _____
Cor. No. G-5
County JEFFERSON E $\frac{1}{4}$ Cor S.7
N.F. DESCHUTES State OREGON

CORNER DIAGRAM

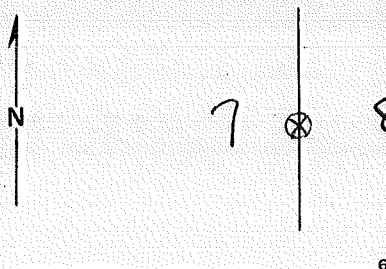

DESCRIBE CORNER MONUMENT FOUND

Assumed stake as corner

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

28" Pine snag 16' high bears S25°W, 8 ft marked $\frac{1}{4}$ S

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature

C.M. Laing

Title

Survey Tech

Division

Headquarters

Date

7-26-62

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By. _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. 6-5 13

Index _____

File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No. _____

Cor.

No. G-13T. 12S R. 10ER.D. SISTERSCounty JEFFERSONE 1/4 COR. S. 9Merid. WILLAMETTEN.F. DESCHUTESState OREGON

CORNER DIAGRAM




PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency _____

DESCRIBE CORNER MONUMENT FOUND

ROCK 18" X 10" X 6"

10" ABOVE GRD.

1/4 ON WEST FACE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

P. PINE

30"

42 FT.

S 1/4BT

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

METAL LOCATION POSTER ON P. PINE

SECTION LINE MARKER BETWEEN SEC. 9 & 10

ON TREE ON SPUR OF SQUAW BACK RIDGE RD.

5 CHAINS N. OF 1/4 CORNER.

Signature

C.M. BEIL

Title

FORESTER

Division

Headquarters

Date


5-11-51

7100-52 (3 68)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____
Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. 6-13

12

13

Index
File No. _____

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)


Tract or
Survey No. _____

Cor.
No. G-21

T 12S R. 10E R.D. SISTERS County JEFFERSON E 1/4 COR S. 11

Merid. WILL. N.F. DESCHUTES State OREGON

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

1/4 STONE FOUND W/SCRIBING ON IT

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature

C.M. BEIL

Title

FORESTER

Division

Headquarters

Date


3-7-51

7100-52 (3 63)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS


12

Index File No. T. R. M. Tract or Surv. No. Cor. 6-21 13

Index File No. 0159 CORNER RECORD (SEARCH) Contract or BLM Survey No. 1000 Cor. No. J-01
 (Ref. FSM 7151.4)
 T 12 S. R. 10 E. R.D. Sisters County Jefferson SW Cor. of
 Merid. Willamette N.F. Deschutes State Oregon Section 7

CORNER DIAGRAM per Legend

S12 S7

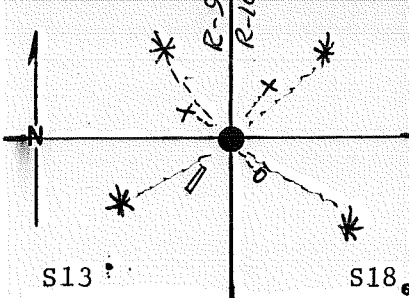

DESCRIBE CORNER MONUMENT FOUND

Mkd. stone 13x9x8 with 4 notches S and 2 N.

Rising 3", well bedded

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

39" PP N49 3/4° W 7 8 mkd. T12S R9E S12

28" Fir N32 1/2° E 16 4, axe mks

19" stump S55° E 8 3, axe mks

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

Down log in SW loc. in debris pile

Placed ATTN. signs on trees

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

170 ft. west of mkr. at junction of Road 1140 and 1154

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: S.C.

Title

ST

Division

CS

Headquarters

SO

Date 11-23-82


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BCSP Rsg. 8" in a mound of stones, 2' x 18" high.

Buried orig. stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" WF Brs. N 44° E 39½ ft. mkd. T12SR10ES7BT

8" WF Brs. S 58¼° E 62½ ft. mkd. T12SR10ES18BT

9" WF Brs. S 61¼° W 44½ ft. mkd. T12SR9ES13BT

10" WF Brs. N 30½° W 40½ ft. mkd. T12SR9ES12BT

(Var. E. by Solar Obs. = 19° 48')

Work Done By: R. Oman Title: PLS Date: 7/20/83 State Registration No. OR-702
or Agency

Flat of Cor. Record Prepared? Yes X No Filed At: BLM Co. Surveyor's Office Date: 1/84

History of Surveys, G.L.O., etc.	30" P	12" F	Trap Stone 16 x 14 x 10 B10", 2N on N. 4 on S. IN 1881 1961: USGS FD. notched stone and 2 BT's
	N50W	N32E	
	6- (10L)	15- (24L)	
	16" TAM	16" TAM	
	S40W	S50E	
	7- (12L)	7- (12L)	

Index File No. 0159 T. 12 S., R. 10 E., W.M.

Contract or Surv. No. BLM 1000


Cor. J-01

Index
File No. 0559 CORNER RECORD (SEARCH) Contract or BLM
(Ref. FSM 7151.4) Survey N^o. 1000 Cor. No. J-05
T 12 S. R. 10 E. R.D. Sisters County Jefferson SW Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 8

CORNER DIAGRAM per Legend

DESCRIBE CORNER MONUMENT FOUND

Stone 18 x 18 x 8 RSG. 6"

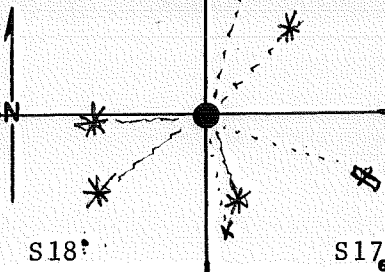

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

20" PP mkd. R10E S11 $\frac{1}{2}$ ° W 41 $\frac{8}{8}$ 20" Sawn stump N11° E ~~100~~, 61 $\frac{8}{8}$ Vis. BTRotted Windthrow, vis.: T12SR10ES17BT S65 $\frac{1}{2}$ ° E 76 $\frac{8}{8}$

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature 7

Cat trail in NW location

Placed ATTN. sign on tree

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Logged and cat work in area

+ 200 ft. S. of logging spur.

CORNER LEGEND:

FS or Unverified
Contr. Other
○ ◇ Searched For/Not Found
⊗ ⊗ Evidence Found/Accept.
● ◆ Permanent Mon. Set/Fd.

Searched By: SC

Title ST Division CS Headquarters SO Date 11-23-82


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP Rsg. 12" in a mound of stone, 2' dia. x 12" high.

Buried stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" WF Brs. N14 1/4° E24° ft. mkd. T12S R10E S8BT

10" PP Brs. S13 1/4° E16 2° ft. mkd. T12S R10E S17BT

10" Cedar Brs. S49 3/4° W31 2° ft. mkd. T12S R10E S18BT

6" PP Brs. S81 3/4° W22° ft. mkd. T12S R10E S7BT; No tree available in Sec. 7 (west)

Work Done By: R. Oman Title: PLS Date: 7/83 State Registration No. OR-702 or Agency

Plat. of Cor. Record Prepared? Yes ☒ No ☐ Filed At: BLM Co. Surveyor's Office Date: 1/84

History of Surveys, G.L.O., etc.	24" P	22" P	Trap
	N64W	N14E	Stone 20x18x16 4N on S., 5 on E.
	62 04 (94L)	66 66 (101L) 69 7	B15"
	14" P	22" P	1961: USGS FD. 4 BT's, 3 up & 1 down
	S12W	S65E	
	44 88 (68L)	79 20 (120L)	

Index File No. 0559 T. 12 S., R. 10 E., W.M.

Contract or Surv. No. 04A 1000 Cor. J-05

12

13

Index
File No. 59

CORNER RECORD (SEARCH)

Tract or
Survey No. _____
Cor.
No. J-9

T 12S. R. 10E.

R.D. SISTERS County JEFFERSON

Merid. Will

N.F. DESCHUTES State OREGON

CORNER DIAGRAM

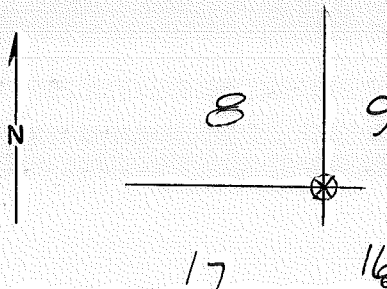


PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature 7

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency 8

DESCRIBE CORNER MONUMENT FOUND

Found rock in fair condition, notched

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

1 B.T. was found. The tree was down and the corner was under the down B.T.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature

D.W.R

Title

Division

Headquarters

U.S.G.S

Date

12-1-61

7100-52

REV. 65 5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor.

J-9

13

Index
File No. 1359 CORNER RECORD (SEARCH) Contract or BLM
(Ref. FSM 7151.4) Survey No. 1000 Cor. No. J-13
T 12 S. R. 10 E. RD. Sisters County Jefferson SW Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 10

CORNER DIAGRAM per legend
S9 S10

DESCRIBE CORNER MONUMENT FOUND
Stone 14 x 11 x 9 RSG, 6" Mks.: 4 & 3 Notches

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Rotted stump S33°W 32⁶, vis.: 12SR10ES16BT

Down log N63°E 42³, BT blade and upper blade,

vis.: T12 R ES1 BT - in track, obv. transp.

NW: rotted wood in tractor track

SE: loc. in tractor track

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Heavy logged area

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SC

Title ST

Division CS

CS

Headquarters SO

SO

Date

11-24-82


CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BCSP RSG. 7" in a mound of stone, 2' x 12" high.

Buried orig. stone alongside pipe

MONUMENT STAMPED



ACCESSORIES. DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" PP BRS. N56³⁰/₄ E 7⁵ ft. Mkd. T12SR10E S10BT

9" PP BRS. S19⁰/₄ E 50⁶ ft. Mkd. T12SR10E S15BT

4" PP BRS. S33⁰ W 17⁷ ft. Mkd. X BT

4" PP BRS. N19⁰/₄ W 20⁹ ft. Mkd. X BT

Work Done By R. Oman Title PLS Date 7/83 State Registration No. OR-702
or Agency

Plat. or Cor. Record Prepared ? Yes ☒ No Filed At BLM Cor. Surveyors Office Date

History of Surveys, G.L.O., etc.	24"P	14"P	Trachyte stone 14x12x12 B8" 4N on S, 3N on I
	N80W 27 ⁷² / ₄ (42L)	N52E 74L(48 ⁸⁴ / ₄)	1961: USGS FD. Notched Stone
			and 2 BT's, 1 up, 1 down on stone
	20"P	24"P	
	S33W 32 ³⁴ / ₄ (49L)	S56E 14L(9 ²⁴ / ₄)	

Index File No. 1359 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. J-13

Index
 File No. 1559 CORNER RECORD (SEARCH) Contract or
 (Ref. FSM 7151.4) Survey No. Cor. No. J-15
 T 12 S. R. 10 E. R.D. Sisters County Jefferson N¹/₄ Cor. of
 Merid. Willamette N.F. Deschutes State Oregon Section 15

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

Found stone in location

12x10x9 no mrks. visible

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

17" P. Pine (SE Tree)

24" high pine stump scribed BT, 10' downhillDown and decayed log with blade scribed /S

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER


Set location tag 1800' E on road, take Road 1139 north to
 junction of Road 1139-E, take left, proceed $1\frac{0}{5}$ mile to spur
 road, take left proceed $0\frac{5}{5}$ mile to road junction, corner
 located 1800' E of junction

Searched By: R. Taylor
Mtt.SCTitle ST Division Eng. Headquarters SQDate 5-4-83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By

Title

Date

State Registration No.
or Agency

Plat or
Certified

Cor. Record Prepared? Yes

No

Filed At

Co. Surveyor's Office Date

History
of
Surveys,
G.L.O.,
etc.

18" Pine

N35°W1031K(67⁹⁸)

18" Pine

S63°E691Ks(45⁵⁴)

Pumice stone 10x12x9 mkd. 1/4 N Face, B10"

Index File No. 1559


T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. J-15

Index
File No. 1759 CORNER RECORD (SEARCH) Contract or BLM
(Ref. FSM 7151.4) Survey No. 1000 Cor. No. J-17
T 12 S. R. 10 E. R.D. Sisters County Jefferson NE Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 15

CORNER DIAGRAM, per legend



DESCRIBE CORNER MONUMENT FOUND

Stone 18x12x7 in location

4 notches visible, RSG. 5", laying on face

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

21" Pine S32 $\frac{1}{2}$ ° E 17 $\frac{8}{10}$ ft., with healed blaze20" Pine S53 $\frac{1}{4}$ ° W 39 $\frac{7}{10}$ ft., with healed blaze23" Pine N48 $\frac{1}{4}$ ° W 28 $\frac{2}{10}$ ft., chopped open, vis.: S ?23" Pine N56 $\frac{1}{4}$ ° E 49 $\frac{5}{10}$ ft., S R10E S10 vis.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take #1139 N. to junct. #1139 E., take left, proceed 1 $\frac{0}{10}$ mile
to spur road, turn left (south), proceed 0 $\frac{3}{10}$ mile, corner located
250' N. of road. Set location tag on Road 250 S of corner

Put Atten. signs on all BT's

835' N to Mkr. on Road 1160

CORNER LEGEND:

FS or Unverified
Contr. Other

○ ◇ Searched For/Not Found

⊗ ⊗ Evidence Found/Accept.

● ◆ Permanent Mon. Set/Fd.

Searched By: R. Taylor
SC - MH

Title

ST

Division

ENG

Headquarters

SQ

Date 5-4-83


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 5" in a mound of stone, 2' x 12" high.

Buried original stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

7" PP BRS N57-3/4° E 30⁰-ft. Mkd. T12S R10E S11 BT

8" PP BRS S70° E 38⁸-ft. Mkd. T12S R10E S14 BT

7" PP BRS S72 1/2° W 17⁴-ft. Mkd. T12S R10E S15 BT

8" PP BRS N0 1/2° W 27⁶-ft. Mkd. T12S R10E S10 BT

Work Done By. R. Oman Title PLS Date 8/4/83 State Registration No. OR-702 or Agency

Plat. or Cor. Record Prepared ? Yes ☒ No Filed At. BLM Co. Surveyors Office Date

History of Surveys, G.L.O., etc.	18" Pine (27 ⁷²)	20" Pine	Trap
	N46° W 421ks	N55° E 751ks (49 ⁵⁰)	Stone 18x12x8 4 notches S, 2 notches E
	14" Pine	12" Pine	B12"
	S53° W 601ks (39 ⁶⁰)	S38° E 271ks (17 ⁸²)	1961: USGS FD. Notched Stone and 2 BT's

Index File No. 1759 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. J-17

Index

File No. 2159 2159

CORNER RECORD (SEARCH) Contract or

BLM

1000

Cor. No. J-21

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey N^o.County Jefferson

SW

Cor. of

Merid. WillametteN.F. DeschutesState OregonSection 12CORNER DIAGRAM, per legend
S11 S12

DESCRIBE CORNER MONUMENT FOUND

SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
36" P S53 E 76 Vis: R10E S1324" P N37½° E 32⁶, Axe mks.

SW location is in cindered road

NW location is a 2' deep root hole

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

7 Heavy logged area - cat trail through corner site - about
75' NE of road

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SC

Title ST

Division CS

Headquarters SQ


Date 12-2-82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 6" in a mound of stone, 2' x 15" high.

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10" PP BRS. N65°E 47⁶-ft. Mkd. T12S R10E S12 BT

10" WF BRS. S38°E 49⁶-ft. Mkd. T12S R10E S13 BT

9" PP BRS. S19 1/4°W 46⁶-ft. Mkd. T12S R10E S14 BT

15" PP BRS. N76°W 15³-ft. Mkd. T12S R10E S11 BT

and Conklin "Beavertail" face hi

Work Done By R. Oman

Title PLS

Date 8/83

State Registration No. or Agency

OR-702

Plat. of

Certified Cor. Record Prepared? Yes ☒ No

Filed At. BLM

Cor. Surveyor's Office Date

History of Surveys, G.L.O., etc.

30" P

N15W 67⁹⁸(103L)

14" P

N37E 31⁶⁸(48L)

Trap rock 16x14x14 B10" 4N on S & 1 on E

8" F

S38W 73²⁶(111L)

30" P

S55E 75⁹⁰(115L)

Index File No. 2159

T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. J-21

Index
File No. 2359 2359 **CORNER RECORD (SEARCH)** Contract or
(Ref. FSM 7151.4) Survey No. _____
T 12 S. R. 10 E. R.D. Sisters County Jefferson Cor. No. J-23
Merid. Willamette N.F. Deschutes State Oregon S/4 Cor. of
Section 12

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

Stone 13x13x6 in md. mkd. $\overline{4}$

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

23" PP S45W $\overline{4}$ Blazed 4 sides

24" PP S60E Chopped open, No scr.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: RT

Title ST

Division

CS

Headquarters


SO

Date 12-8-82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Plat or Cor. Record Prepared? Yes No Filed At _____ Co. Surveyor's Office Date _____

History of Surveys, G.L.O., etc. 14" P N45W 11 LKS (7³) 14" P Stone 14x14x7 Mkd. 1/4 N. face B8"

S60E 87 LKS. (57⁴)

Index File No. 2359 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. J-23

Index
 File No. 2559 CORNER RECORD (SEARCH) Contract or
 (Ref. FSM 7151.4) Survey No.

 T 12 S. R. 10 E. R.D. Sisters County Jefferson Cor. No. J-25
 Merid. Willamette N.F. Deschutes State Oregon SE Cor. of
 Section 12

CORNER DIAGRAM per legend

S12

S7

R.10 E.
R.11 E.

S13

S18

6

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

7

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER MONUMENT FOUND

SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Lots of stones in logged area

Title

ST

Division

CS

Headquarters

SQ

Date


12-8-82

Searched By: RT

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By. _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Plat or Cor. Record Prepared? Yes No Filed At. Co. Surveyor's Office Date

History of Surveys, G.L.O., etc.	20" P	30" P	Trap stone 15x14x9 B10", 2N. on N, 4 on S
	N42W 27L (17 ⁸)	N70E 25L (16 ⁵)	
	24" P	25" P	
	S70W 117L (77 ²)	S25E 12L (7 ⁹)	

Index File No. T. S., R. E., W.M. Contract or Surv. No. Cor. J-25

Index
 File No. 0561 CORNER RECORD (SEARCH) Contract or BLM
 (Ref. FSM 7151.4) Survey No. 1000 Cor. No. L-05
 T 12 S. R. 10 E. R.D. Sisters County Jefferson E/4 Cor. of
 Merid. Willamette N.F. Deschutes State Oregon Section 18

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

FD MKD Stone

Well bedded

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

35" PP S81½° E 4⁸ Vis ¼S41" PP N71½° W 27⁴ Vis ¼S

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

750' E of Rd. 1141

938' N of Rd. 1227

221' E of Spur #21

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SC

Title

ST

Division

CS

Headquarters

SO

Date


11-24-82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG 7" in a mound of stone, 2' x 12" high.
Buried original stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" PP BRS. S03° E 20⁶ ft. Mkd. X BT

8" PP BRS. N23³⁰ 4 W 69⁷ ft. Mkd. 1/4 S18 BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. or Agency OR-702

Flat of Cor. Record Prepared ? Yes X No Filed At BLM Gov. Surveyor's Office Date

History of Surveys, G.L.O., etc.	28" P	Trap Stone 14x12x5 B8" Mkd. 1/4 on W Face
	N73W 26 ⁴⁰ (40L)	1962: Minks FD. Stone RSG. 11", MKD.
	26" P	S.18 = 39" PP
	S70E 5L (3 ³⁰)	S.17 = 32" PP

Index File No. Q561 T. 12 S., R. 10 E., W.M. Contract or Surv. No. L-05

Index

File No. 0961

CORNER RECORD (SEARCH) Contract or

BLM

Cor. No. L-09

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey No. 1000

Merid. Willamette

N.F. Deschutes

County Jefferson

W/4

Cor. of

State Oregon

Section 16

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

SF/NF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

30" P. Pine cutdown scribing on underside ($\frac{1}{2}$ S)

has BT tag

S56 $\frac{1}{4}$ W 14 $\frac{5}{8}$ 6 30" Fir NE scribed $\frac{1}{4}$ N13 $\frac{1}{2}$ ° E 32 $\frac{1}{2}$

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Located on N. edge of clearcut, take #1141 N. to Junction of Road #1141-R, take left, proceed 0 $\frac{2}{2}$ mile to junction #1141-R, proceed 1 $\frac{2}{2}$ miles to location tag, corner located 1000' N. of road.

1962: Mkr. on Spur Rd. 22 at 650 ft.

CORNER LEGEND:

FS or Unverified
Contr. Other

Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: R. Taylor
S. Chamberlin
M. Heath

Title ST

Division Eng Headquarters SO


Date 5-3-83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 6" in a mound of stone, 2' x 12" high.

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

13" WF BRS. S28°E 14⁶ft. Mkd. 1/4 S16 BT

5" PP BRS. N 36⁷W 18⁷ft. Mkd. X BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702
or Agency

Plat. or Certified Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM Co. Surveyor's Office Date

History of Surveys, G.L.O., etc.	14" Fir	14"x12"x4" slate rock 1/4 west face, BRD. 8"
	N12°E 31 ⁰² (47L)	1962: Minks FD. Stone RSG. 3", Mkd.
	28" Pine	S.17 = 30" PP
	S50°W	S.16 = 28" DF
	13 ²⁰ (20L)	

Index File No. 0961 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. L-09

Index

File No. 1361

CORNER RECORD (SEARCH)

Contract or

BLM

Cor.

L-13

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey No.

1000

No.

Merid. WillametteN.F. Deschutes

County

Jefferson

W/4

Cor. of

State OregonSection 15

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

Stone 14x10x3 RSG, 9" MKD. $\frac{1}{4}$ on W. Face,

Well bedded in rosette of stone

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

30" PP, Vis $\frac{1}{4}$ S, N63 $\frac{1}{2}$ ° E 35 $\frac{6}{6}$ 24" stump S55 $\frac{1}{4}$ ° N 18 $\frac{6}{6}$, Vis: BT on loose blade

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Logged area

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

111 ft. N. of road marker

Searched By:

SC

Title

ST

Division

CS

Headquarters

SO

Date

11-24-82


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 6" in mound of stone, 2' x 12" high,

Buried original stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

4" PP BRS. S84 1/2° E 29 8/10 ft. MKD. X BT

7" WF BRS. N41 1/4° W 14 7/10 ft. MKD. 1/4 S16 BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702
or Agency

Plat or Certified Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM ~~Co. Surveyors~~ Office Date

History of Surveys, G.L.O., etc.	24" P	Trap Stone 14x10x3, B8", 1/4 on W Face
	N63E 35 64/100 (54L)	1962: Minks FD. Stone RSG. 12", Mkd.
		S.16 = 21" PP, D&D
		S.15 = 27" PP
	24" P	Mkr. on Spur Rd. #22 at 117 ft. S.
	S54W 17 82/100 (27L)	

Index File No. 1361 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. L-13

Index

File No. 1761

CORNER RECORD (SEARCH) Contract or

BLM

T 12 S. R. 10 E.

R.D.

Sisters

(Ref. FSM 7151.4)

Survey No.

1000

Cor.

No.

L-17Merid. Willamette

N.F.

Deschutes

County

Jefferson

E/4

Cor. of

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

Stone Mkd. $\frac{1}{4}$ laying on face

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

15" PP N45° E 32-ft. VIS: $\frac{1}{4}$ 40" Windfall Pine S W ft. No Mks. visible,
faint blaze

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SCTitle ST

Division

CS

Headquarters

SQ

Date

12-2-82


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 12" in Md. of stone RSG. above BC,

2' x 15" high. Buried original stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

11" PP BRS. N78 1/4° W 38 5/8 ft. Mkd. 1/4 S15 BT

5" PP BRS. S46 1/4° E 23 1/8 ft. Mkd. X BT

Work Done By R. Oman Title PLS Date 8/3/83 State Registration No. OR-702
or Agency

Plat. or Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM ~~Box~~ Surveyors Office Date

History of Surveys, G.L.O., etc. 14" P Trap Rock 14x12x8 B8" 1/4 on W Face

N45E 32 3/4 (49L) 1950: Beil FD. 2 BT's

40" P

S38W 61 3/8 (93L)

Index File No. 1761 T. 12 S., R. 10 E., W.M.


Contract or Surv. No.

Cor. L-17

Index

File No. 2161 CORNER RECORD (SEARCH) Contract or BLM
 (Ref. FSM 7151.4) Survey No. 1000 Cor. No. L-21
 T 12 S. R. 10 E. R.D. Sisters County Jefferson E/4 Cor. of
 Merid. Willamette N.F. Deschutes State Oregon Section 14

CORNER DIAGRAM per legend



DESCRIBE CORNER MONUMENT FOUND

FD. Outcrop ± 100 below rim Mkd. $\diamond$ $\frac{1}{4}$ on west face

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND 2

FD. 8" Juniper Windthrow Mkd. $\frac{1}{4}$ S BT

Both apparently transported

FD. Remains of Pine, VIS: $1\frac{1}{4}$ BTN19°E 57' $\pm 6"$ $\emptyset$

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER 3

Loc. tags on Rd. 1139

550 ft. S. to $\frac{1}{4}$ cor.

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At _____
 Object Ident. _____
 Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified
 Contr. Other
☐ ☐ Searched For/Not Found
☒ ☒ Evidence Found/Accept.
☒ ☒ Permanent Mon. Set/Fd.

Searched By: WM

Title ST Division CS Headquarters SQ


Date 11-15-82
5/2/83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

3 1/2" Stemmed Brass Disc Grouted into Boulder

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

11" PP BRS. N064³⁰ E 9⁰ft. Mkd. 1/4 S13 BT

6" PP BRS. N80⁰ N 55⁷ft. Mkd. 1/4 S14 BT

Work Done By: R. OMAN

Title: PLS

Date: 8/8/83 State Registration No. or Agency

OR-702

Plat or Certified Cor. Record Prepared ☒ Yes

No

Filed At:

BLM

Co. Surveyor's Office Date

History of Surveys, G.L.O., etc.

14" P Basalt Stone 10x12x20 ft. Mkd. X & 1/4 on W. Face

N10E 58⁷⁴ in place above ground

(89L)

1950: Beil FD. 1 BT

14" Jun

S80W 16⁵⁰ (25L)

Index File No. 2161 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. L-21

Index

File No. 2561

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey No. Cor.
No. L-25T 12 S. R. 10 E. R.D.

Sisters

County

Jefferson

Merid. WillametteN.F. Deschutes

State

Oregon

E/4

Cor. of

Section 13

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
SFNFDESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
On Ridge W. of fork in canyon

PHOTO IDENTIFICATION DATA

Photo No. Filed At. Object Ident. Ident. By Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: RT

Title

ST

Division

CS

Headquarters

SO


Date

12-8-82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW B¹'s WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____
 Plat or Cor. Record Prepared? Yes No Filed At _____ Co. Surveyor's Office Date _____

History of Surveys, G.L.O., etc.	14" F	Trap Stone 14x10x6 B8", 1/4 W. Face
	N10W 20L(13 ²⁰)	
	28" F	
	S48E 56L(36 ⁹⁶)	

Index File No. 2561 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. L-25

Index

File No. 0163

CORNER RECORD (SEARCH) Contract or BLM

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey No. 1000Cor. No. N-01Merid. WillametteN.F. DeschutesCounty Jefferson


SW

Cor. of

State OregonSection 18

CORNER DIAGRAM per legend

S13 S18

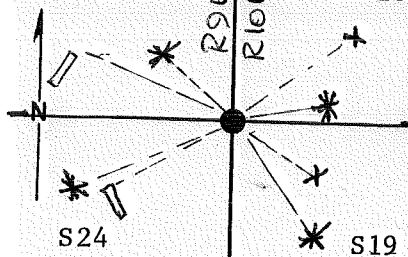

S24 S19

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER MONUMENT FOUND

12x8x6"Stone RSG 5", 3 notches N&S, well bedded in collar of stones

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

24" PP S58²⁰ E 15⁵ VIS T12S R10E S19down, S53⁰ W 28², Rotted P. Pine Windthrow, Blade, VIS: T12SR9ES2424" P N65⁰ W 27¹ VIS: T12SR9E BT, Down & Rotting25" PP Snag N53¹/₂ E 26⁵-N, Marks visible

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

1600 ft. west of mkr. on Road #1140

Searched By: RED

Title PLS

Division CS

Headquarters

SO

Date 8/83


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BCSP RSG. 3" in mound of stone.

Buried original stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10" WF BRS. N72½°E 14⁴ft. Mkd. T12S R10E S18 BT

14" WF BRS. S25°E 27⁴ft. Mkd. T12S R10E S19 BT

10" WF BRS. S63°W 32⁴ft. Mkd. T12S R9E S24 BT

11" WF BRS. N47°W 16⁴ft. Mkd. T12S R9E S13 BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702
or Agency

Plat or ☒ Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM ~~Co. & Surveyor's Office~~ Date

History of Surveys, G.L.O., etc.	1881	24" P	22" P	Trap Stone 10x10x6 B6", 3N on N&S
		N68W 39L(25 ⁷⁴)	N55E 38L(25 ⁰⁸)	
				(1961: USGS FD. Stone & 4 BT's)
		24" P	24" P	
		S55W 42L(27 ⁷²)	S55E 22L(14 ⁵²)	

Index File No. 0163 T 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. N-01

Index

File No. 0563

CORNER RECORD (SEARCH)

BLM

Contract or

1000

Cor

N-05

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey No.

No.

Merid. WillametteN.F. DeschutesCounty Jefferson

SE


Cor. of

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

Stone mound in loc., no mks.

S18 S17

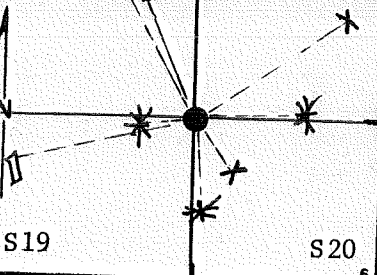Section 18

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

23" PP Snag S26 $\frac{1}{2}$ ° E 11 $\frac{5}{8}$, VIS: T12S R10E S20 BT22" PP Snag N60° E 27 $\frac{5}{8}$, VIS: T12S R10E S17Down log S70° W 32 $\frac{0}{8}$ VIS: T12S R10E S19, appears transportedDown log N20° W 20 $\frac{1}{8}$ Blade, VIS: T12S S18

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

1961: Mkr. 310ft. S. on Road #17

Mkr. 1013ft. E. on Road #1227

Searched By: SC

Title ST

Division CS

CS

Headquarters SO

SO

Date


11-23-82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BCSP RSG. 4" in mound of stone, 2' x 12" high

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

6" WF BRS. N88½°E 16⁵ ft. MKD. T12SR10E S17 BT

11" WF BRS. S04½°E 18⁵ ft. MKD. T12SR10E S20 BT

4" WF BRS. S77¼°W 5⁵ ft. MKD. X BT

12" WF BRS. N27°W 33² ft. MKD. T12SR10E S18 BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702

Plat. or Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM ~~Cor. Surveyors Office~~ Date 11

History of Surveys, G.L.O., etc.	28" P	23" P	Basalt Stone 12x10x10, B8", 3N on S, 5 on 1
	N18W 19 ¹⁴ (29L)	N58E 25 ⁷⁴ (39L)	1961: USGS FD. Notched stone & 3 BT's
	18" P	25" P	S.18 = 30" PP, D&D
	S75W 34 ⁹⁸ (53L)	S25E 9 ⁹⁰ (15L)	S.17 = 25" PP
			S.19 = 20" PP, D&D

Index File No. 0563 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. N-05

Index

File No. 0763

CORNER RECORD (SEARCH) Contract or BLM

(Ref. FSM 7151.4)

Survey No. 1000Cor. No. N-07T 12 S. R. 10 E. R.D. SistersCounty Jefferson

S/4

Cor. of

Merid. WillametteN.F. DeschutesState OregonSection 17

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

Stone 12x12x5 in location but no

mrkg. visible

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

36" P. Pine scribed $\frac{1}{4}$ (NE tree) N06 $\frac{1}{4}$ ° E 33 $\frac{3}{4}$

30" P. Pine sawn stump 30" high with toe blaze, scribed B

S69° N 8 $\frac{9}{16}$

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

CORNER LEGEND:

FS or Unverified
Contr. Other

Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Set location tag 900' W. of cor., take Road #1141 N to Spur 27/
small wood sign (old 1"x2"x12" lath[#] is sign), turn right and
proceed 0 $\frac{2}{3}$ mile to location tag. Above Spur Road located
0 $\frac{1}{2}$ mile S of sec. line on #1141Searched By: R. Taylor
SC MH

Title ST

Division Eng

Headquarters

SQ

Date

5-3-83


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BCSP RSG. 6" in a mound of stone.

Buried stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" PP BRS. N 27° W 9⁶ ft. MKD. X BT

7" PP BRS. S 71½° E 21² ft. MKD. ¼ S20 BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702
or Agency

Plat or Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM ~~Co. Surveyor's Office~~ Date

History of Surveys, G.L.O., etc.	Basalt	30" Pine	1962: Minks FD. Stone
	Stone 12x12x5	N15°E 48.1ks	RSG. 12", MKD.
	30" Pine	¼ on N Face	(31 ⁶⁸) S.17 = 39" PP
	S65°W 11 lks	B8"	S.20 = 23" PP, Snag

(7²⁶)

MKR. on Rd. 27 at 1010 ft. W of cor.

Index File No. 0763 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. N-07

Index
File No. 0963 CORNER RECORD (SEARCH) Contract or BLM
T 12 S. R. 10 E. R.D. Sisters (Ref. FSM 7151.4) Survey No. 1000 Cor. No. N-09
Merid. Willamette N.F. Deschutes County Jefferson SE Cor. of
State Oregon Section 17

CORNER DIAGRAM per legend

S17

S16

S20

S21

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified
Contr. Other
○ ◇ Searched For/Not Found
✗ ✗ Evidence Found/Accept.
● ◆ Permanent Mon. Set/Fd.

DESCRIBE CORNER MONUMENT FOUND

Stone 18x12x7 .4 notches visible

Obviously slope dist. used by GLO Surveyor

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

30" P. Pine T12SR10E

S13¹/₄°W 12⁹/₁

31" P. Pine T12SR10E S16

N33¹/₂°E 11¹/₁

27" P. Pine T12SR10E S17

N46°W 17³/₃

Rotted Windthrow Pine in SE location, no marking

1958 location tag stating cor. 13³/₃ East

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Located on N. side of canyon, take Road #1141 N. to junction
of Road #1141-R, take left, proceed 0²/₂ mile to junction of
Road #1141-O, take left, proceed 1²/₂ miles to location tag
stating corner lies 1600' S.

Searched By: R. Taylor
SC - MH

Title ST Division Eng Headquarters SO Date 5-3-83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP. RSG. 5" in mound of stone.

Buried original stone alongside pipe.

+300' south of canyon rim

ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE


3" Cedar BRS. N89°E 16 7/8 ft. MKD. X BT

3" Cedar BRS. S44 1/2°E 27 3/4 ft. MKD. X BT

10" WF S82 1/2°W 11 4/5 ft. MKD. T12S R10E S20 BT

N W (nothing available)

MONUMENT STAMPED



Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702

Plat or Certified Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM Co. Surveyor's Office Cor. Surveyor's Office Date 11

History of Surveys, G.L.O., etc.	26" Pine	Trachyte	28" Pine	1961: USGS FD.
	N47°W 25 lks	Stone	N32°E 16 lks (10 56/57)	notched rock
	(16 50/51)	18x12x12		& 3 BT's
	23" Pine	3 Not. S 4 not E	18" Pine	

S13°W 19 lks (12 54/55) B10" S55°E 23 lks (15 18/19)

Index File No. 0963 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. N-09

Index

File No. 1163 CORNER RECORD (SEARCH) Contract or BLM
 (Ref. FSM 7151.4) Survey No. 1000 Cor. No. N-11
 T 12 S. R. 10 E. R.D. Sisters County Jefferson
 Merid. Willamette N.F. Deschutes State Oregon Section 21

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

Stone 18x12x12

Faint $\frac{1}{4}$ on N. Face, well bedded in Rosette of Stone

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Dead and Down Pine SW with Blaze and faint $\frac{1}{4}$ visible

Dead and Down Decayed Pine, both blades but scribing weathered.

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified
 Contr. Other
☐ ☐ Searched For/Not Found
☒ ☒ Evidence Found/Accept.
☒ ☒ Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Located on N. edge of canyon, take #1141 N. to junction of
 Road #1141-R, take left, proceed $0\frac{2}{3}$ mile to junction of Road
 #1141-O, proceed $1\frac{7}{8}$ mile to location tag, $\frac{1}{4}$ cor. 500' S. of
 road.

Searched By: R. Taylor
 SC - MH

Title ST

Division Eng

Headquarters

SO

Date 5-3-83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 10" in a mound of stone, 2' 0" x 18" high.

At top of canyon rim. Buried original stone alongside pipe.

MONUMENT STAMPED

T12S R10E

S16
S21 1/4

1983

ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

6" PP BRS S60°E 26⁵-ft. MKD. 1/4 S21BT

8" PP BRS N22°W 8⁵-ft. MKD. 1/4 S16 BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702
or Agency

Plat. or
Certified Cor. Record Prepared? Yes ☒ No ☐ Filed At. BLM ~~Co. Surveyor's Office~~ Date

History of Surveys, G.L.O., etc.		Trachyte	22" Pine
		Stone 18x12x12	N20°E 42 lks
	22" Pine	1/4 on N. Face	(27 ⁷²)
	S80°W 41 lks	B12"	


(27⁰⁶)

Index File No. 1163 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. N-11

Index
File No. 1363 CORNER RECORD (SEARCH) Contract or BLM
T 12 S. R. 10 E. R.D. Sisters (Ref. FSM 7151.4) Survey No. 1000 Cor. No. N-13
Merid. Willamette N.F. Deschutes County Jefferson SE Cor. of
CORNER DIAGRAM per legend S16 S15 State Oregon Section 16

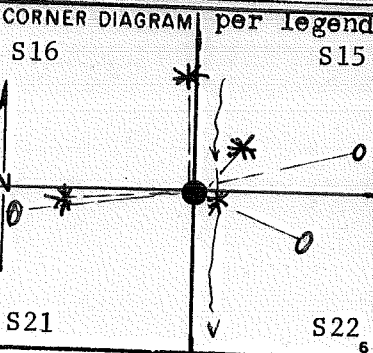

DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

30" F. Stump N70°E 49°, axe mks. on toe

*36" F. Stump S83°W 49⁶, mks. vis. but illegible 52⁷⁵@ 20°-

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____

Signature

* 20" Fir Stump S65°E 29², no mks. Nothing NW29⁶@ 10°

*Apparently slope dist. msd. by GLO

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

on west side of draw about 500 feet below rim and corner of clearcut.

CORNER LEGEND:

FS or Unverified
Contr. Other
○ ◇ Searched For/Not Found
⊗ ⊗ Evidence Found/Accept.
● ◆ Permanent Mon. Set/Fd.

Searched By: SC


Title ST Division CS Headquarters SO Date 11-10-82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 6" in mound and stone, 2' x 12" high.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" Cedar BRS. N42°E 8⁵-ft. MKD. T12S R10E S15 BT

6" WF BRS. S72°E 1⁶-ft. MKD. T12S R10E S22 BT

5" WF BRS. S85 1/2°W 21⁷-ft. MKD. X BT

8" WF BRS. N01 1/2°W 18³-ft. MKD. T12S R10E S16 BT

Work Done By. R. Oman Title PLS Date 8-83 State Registration No. OR-702
or Agency

Plat or Cor. Record Prepared? Yes ☒ No ☐ Filed At. BLM ~~Cor. Surveyors Office~~ Date

History of Surveys, G.L.O., etc.	24" P	24" F	Trap Stone 16x16x12, B. 10", 3 N on S&E
	N12W 17 ¹⁶ -(26L)	N70E 48 ⁸⁴ -(74L)	1961: USGS FD. 2 BT's, 1 up, 1 down
			at edge of small drain
	28" F	16" F	
	S80W 52 ¹⁴ -(79L)	S65E 29 ⁷⁰ -(45L)	

Index File No. 1363 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. N-13

Index
 File No. 1563 CORNER RECORD (SEARCH) Contract or BLM
 (Ref. FSM 7151.4) Survey No. 1000 Cor. No. N-15
 T 12 S. R. 10 E. R.D. Sisters County Jefferson S/4 Cor. of
 Merid. Willamette N.F. Deschutes State Oregon Section 15

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

SP/NF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

28" Sawn Stump N81°W 31' Blade, Burnt, VIS 13
 at top of road cut bank

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Loc. tag and sign Bd. on road

CORNER LEGEND:

FS or Unverified
 Contr. Other
☐ ☐ Searched For/Not Found
☒ ☒ Evidence Found/Accept.
☒ ☒ Permanent Mon. Set/Fd.

Searched By: SC

Title ST

Division CS

Headquarters SQ


Date 11-10-82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 6" in mound of stone, 2' x 18" high, at
toe of cut bank along south side of road.

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" PP BRS. N81°E 50⁵ft. MKD. X BT

8" PP BRS. N02 1/2°E 21⁷ft. MKD. 1/4 S15 BT

No trees available in sec. 22

(Var. by solar = 18°E)

Work Done By R. Oman Title PLS Date 8/3/83 State Registration No. OR-702
or Agency

Plat. or Cor. Record Prepared ? Yes ☒ No ☐ Filed At BLM Go. Surveyor's Office Date 11

History of Surveys, G.L.O., etc.	28" P	Basalt Stone 28x26x18 B15" 1/4 on N. Face
	N81W 30 ³⁶ (46L)	1962: Minks FD. 34" DF Stump MKD. BT
	— —	Loc. Mkr. on DF Stump 10' S of cor.
	26" P	Loc. Mkr. on Stump Root on Cut Bank
	S55E 36 ³⁰ (55L)	3' SE of cor.

Index File No. 1563 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. N-15

Index

File No. 1763

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Contract or BLM
Survey No. 1000Cor.
No. N-17

T 12 S. R. 10 E.

R.D. Sisters

County

Jefferson

SE

Cor. of

Merid. Willamette

N.F. Deschutes

State Oregon

Section 15

CORNER DIAGRAM per legend
S15 S14

DESCRIBE CORNER MONUMENT FOUND

Stone 12x12x8 in md., with

Kn. Needle, MKD. per call, in Rosette of Stone, well bedded

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
Loc. tags on treesFD. NW: Rotting Pine Windfall N W Ft. Mkd. T12S R10E S15 BT
NE: Nothing

SE: Rotting Pine Windfall S45°E Ft. Upper BL & "BT"

SW: Rotting Pine Transp; Root Hole in Loc.; Mkd. SR10ES2 BT
DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified
Contr. Other

Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SC

Title

ST

Division

CS

Headquarters

SO

Date

11-10-82


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BCSP RSG. 6" in mound of stone, 2' x 12" high.

Buried original stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" PP BRS. N17³⁰/₄ E 18⁴ ft. Mkd. T12S R10E S14 BT

5" PP BRS. S26⁰ E 12¹/₂ ft. Mkd. X BT

4" PP BRS. S42¹/₄ W 17²/₂ ft. Mkd. X1 BT

7" PP BRS. N57⁰/₄ W 23⁰ ft. Mkd. T12S R10E S15 BT

Work Done By R. Oman Title PLS Date 8-83 State Registration No. OR-702
or Agency

Plat or Cor. Record Prepared? Yes ☒ No ☐ Filed At BLM ~~Cor. Surveyor's Office~~ Date

History of Surveys, G.L.O., etc.	26" P (23L)	18" P	Trap Stone 14x12x10 B8"
	N85W 15 ¹⁸	N12E 15 ¹⁸ (23L)	3 notches S & 2 N on E
	20" P	22" P	1961: USGS FD. Notched Stone
	S35W 31 ⁶⁸ (48L)	S45E 106 ²⁶ (161L)	and 2 BT's

Index File No. 1763 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. N-17

Index
File No. 1963

CORNER RECORD (SEARCH) Contract or

BLM

1000

Cor.

No.

N-19

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey No.

County Jefferson

S/4

Cor. of


Merid. Willamette

N.F. Deschutes

State Oregon

Section 14

CORNER DIAGRAM, per legend

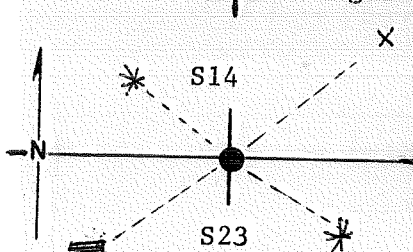

DESCRIBE CORNER MONUMENT FOUND

Stone 13 x 12 x 6 PTD. blue, VIS.: 1

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

55"PP, N62°E 80 ² ft. Burnt one side, VIS.: 4

S66°W 73°

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

24"PP windfall log in SWLOC., burnt blaze, VIS.: E-T
apparently moved by tractor work.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Searched By: WM

Title ST

Division CS

Headquarters SO

Date 11/15/82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BCSP RSG, 3" in a mound of stone, 2' x 12" high.

Buried original stone alongside pipe.

MONUMENT STAMPED

T12S R10E

S14

S23

1983

¼

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

11" PP BRS. N 56¼°W 32¼ ft. MKD. ¼ S14 BT

13" PP BRS. S 51½°E 59⅞ ft. MKD. ¼ S23 BT

Work Done By R. Oman Title PLS Date 3 Aug. 83 State Registration No. OR-702
 Certified Cor. Record Prepared? ☒ Yes No Filed At BLM XXXXXX Surveyors Office Date

History of 40" P Stone 16 x 12 x 6 BIO"

Surveys, N62E 77° (118L) 1951: Beil Fd. 2 BT's

G.L.O., 1

etc. 28" P

S62W73° (112L)

Index File No. 1963 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. N-19

Index

File No. 2163

CORNER RECORD (SEARCH)

Contract or BLM

1000

Cor.
No. N-21

T 12 S. R. 10 E. R.D. Sisters

(Ref. FSM 7151.4)

Survey No.

Jefferson

SE

Cor. of

Merid. Willamette

N.F. Deschutes

County

State Oregon

Section 14

CORNER DIAGRAM per legend

S14

S13

DESCRIBE CORNER MONUMENT FOUND

Rock pile - Stone of call size but no marks.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

18" PP, windfall, 63- VIS RE3

34" PP Stump, N55°W5-6 toe blade, VIS.: BT

35" Pine Windfall, N55°W5-6 toe blade, VIS.: 2

PHOTO IDENTIFICATION DATA

Photo No.

Filed At.

Object Ident.

Ident. By

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Placed signs on tree.

Searched By: SC

Title ST

Division CS

Headquarters SQ

Date 12/2/82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" ACAP RSG. 16" grouted into ledge rock and raised mound of stone around pipe, 2' diam. RSG 18" high. Buried stone alongside pipe.

MONUMENT STAMPED

T12S R10E

S14/S13

S23/S24

1983

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

16" PP BRS. N 29½° E 42½ ft. mkd. T12S R10E S13 BT

10' wide x 3' high rock ledge BRS. S443/4° E21½ ft. MKD. X B30

10" WF BRS. S93/4 W36½ ft. MKD. T12S R10E S23 BT

9" PP BRS. N49° W17½ ft. MKD. T12S R10E S14 BT

Work Done By. R. Oman Title PLS Date 11 Aug. 83 State Registration No. OR-702

Plat. or Certified Cor. Record Prepared? (Yes) No Filed At. BLM ~~XXXXXXXXXX~~ Office Date

History of Surveys, G.L.O., etc.	34"P	36"P	Trap stone 14 x 12 x 10, 8" in GRD.
	N5SW4 ⁶² (7L)	N23E 78 ⁵⁰	(119½) MKD. 3 N on S & 1 N on E
	18"P	24"P	
	S20W 63 ³⁶ (96½)	S25E 24 ⁴² (39½)	

Index File No. 2163 T.12 S., R.10 E., W.M. Contract or Surv. No.

Cor. N-21

Index
File No. 2363 CORNER RECORD (SEARCH) Contract or BLM
(Ref. FSM 7151.4) Survey No. 1000 Cor. No. N-23
T 12 S. R. 10 E. R.D. Sisters County Jefferson S/4 Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 13
CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

18"PP stump S44 $\frac{1}{2}$ ^O E46^O VIS.: BT20"PP rotted stump N12 $\frac{1}{2}$ ^O W61 $\frac{4}{-}$ VIS.: BT

Both sawn

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

115' N. of MKR. on spur road.

Searched By: SC

Title ST Division CS Headquarters SO


Date 12/2/82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½" x 30" BOSP RSG. 8" in MD. of stone, 2½' x 15" high

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5"PP BRS N01°E11⁷ ft. MKD. X BT

11"PP BRS S41¹°W19² ft. MKD. ¼ S24BT

(Var. by solar = 17°28'E)

Work Done By: R. Oman Title: PLS Date: 11 Aug 83 State Registration No. or Agency: OR-702

Plat. or Certified Cor. Record Prepared? ☒ Yes No Filed At: BLM ~~XXXXXX~~ Office Date

History 24"P Trap stone 14 x 12 x 8, 8" in GRD

of N15W60⁷² (92L) MKD. ¼ on N face

Surveys,

G.L.O.,

etc.

20"P

S48E 45⁵⁴ (69L)

Index File No. 2363 T. 12S., R. 10 E., W.M.

Contract or Surv. No.

Cor. N-23

Index

File No. 2563

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey No.

Cor. N-25
No.

T 12 S. R. 10 E. R.D. Sisters

County Jefferson

Merid. Willamette

N.F. Deschutes

State Oregon

NE

Cor. of

Section 24

CORNER DIAGRAM per legend

S13

S18

R10E
R11E

S24

S19

6

DESCRIBE CORNER MONUMENT FOUND

Alum. 4 rod RS6.12" in rock md. No marked stone.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

18" P log, appears to have rolled down hill or moved by
logging operations, VIS RT

PHOTO IDENTIFICATION DATA

Photo No.

Filed At.

Object Ident.

Ident. By

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

615' E of marker on Spur Road.

Area has undergone logging and fire.

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By:

RT

Title ST

Division CS


Headquarters SQ

Date 12/8/82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Plat or _____
Certified Cor. Record Prepared? Yes No Filed At _____ Co. Surveyor's Office Date _____

History of Surveys, G.L.O., etc.	24"P (75L)	26"P	Trap Stone 12x12x10B8", 3N, N&S
	N44W49 ⁵	N34E96 ⁴	(146L)
	10"P	28"P	
	S48W68 ⁰	S8E141 ⁹	(103L) (215L)

Index File No. 2563 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. N-25 12 13

Index
File No. 0565 CORNER RECORD (SEARCH) Contract or
(Ref. FSM 7151.4) Survey No.
T 12 S. R. 10 E. R.D. Sisters County Jefferson Cor. No. P-05
Merid. Willamette N.F. Deschutes State Oregon E/4 Cor. of
Section 19

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

SF/NF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SF/NF

PHOTO IDENTIFICATION DATA

Photo No. Filed At. Object Ident. Ident. By Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Logged and burned - snow on ground 11/24/82

1956: Loc. Mkr. on 11" DF at N6SE 3 ft.

1956: Loc. Mkr. on 7 CH. S of COR. on Six Cr. Rd.

Searched By: REO & GS

Title

Division

CS

Headquarters


SQ

Date 7/83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Plat of _____
Certified Cor. Record Prepared? Yes No Filed At _____ Co. Surveyor's Office Date _____

History of Surveys, G.L.O., etc.	28" P	Trap Stone 14x12x12, 8" in ground
	N4SE 27 ⁰⁶ (41L)	Mkd. 1/4 on W. Face
	25" P	1956: Bell Fd. Stone RS 6.7", Mkd., & 2 BTS
	S37W 15 ⁸⁴ (24L)	S.20 = 22" PP, Mkd. 1/4 S BT, D&D
		S.19 = 18" PP, Mkd. 1/4 S, D&D

Index File No. 0565 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. P-05

Index

File No. 0965

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey No.

Cor. P-09
No.

T 12 S. R. 10 E. R.D. Sisters

County Deschutes

W $\frac{1}{4}$

Cor. of

Merid. Willamette

N.F. Deschutes

State Oregon

Section

21

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Paced north from 20/21

29/28

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SC/MH

Title ST

Division

CS

Headquarters

SQ

Date

5/3/83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP, RSNG 5" @ STONE LOCATION IN STONE
MOUND, BURIED STONE BESIDE CAP ON SOUTH SIDE

(SET LOCATION TAG ON RD. - COR. N 73° E @ 225 ft.)

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

11" W. FIR, S 63° 30' E, 41 3/4 ft., 60 D NAIL IN N.N.E. BASE, SCBD "W/4 S 21 BT"
10" W. FIR, S 18° 30' W, 39 3/8 ft., 60 D NAIL IN E.S.E. BASE, SCBD "E/4 S 20 BT"
30" P. PINE, N 03° 30' W, 37 5/8 ft., ORIGINAL B.T.

33" P. PINE, S 33° 00' E, 68 1/2 ft., ORIGINAL B.T.

(SIPE - SUMNER COMPASS - DELIN. 19 1/2° E.)

Work Done By: W. MILLER Title: L.S. THE FIRST Date: 8/13/84 State Registration No. 2111
or Agency

Plat or Cor. Record Prepared? Yes No Filed At: Co. Surveyor's Office Date

History of
24" Pine
N 5° W

Surveys, (56 LKS.) Basalt Stone 18 x 14 x 14 24" Pine

G.L.O., 39 9/16 ft. Mkd. 1/4 W. Face S 35° E (100 LKS)


etc. 10" in ground 66 00 Ft.

Index File No. 0965 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. p-09

MONUMENT STAMPED



9

10

11

12

13

Index
File No. 1165 CORNER RECORD (SEARCH) Contract or
(Ref. FSM 7151.4) Survey No. Cor.
No. P-11T 12 S. R. 10 E. R.D. Sisters County Jefferson C/4 Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 21

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No. Filed At. Object Ident. Ident. By

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

CORNER LEGEND:

FS or Unverified
Contr. Other☐ ☐ Searched For/Not Found☒ ☒ Evidence Found/Accept.☒ ☒ Permanent Mon. Set/Pd.

Searched By:

Title

Division

Headquarters

Date

Walt Miller

PLS

SO

Bend


10/84.

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET from survey a 2 1/2" x 30" BCSP RSG.
8" in a stone mound, per BLM Manual
of instructions

MONUMENT STAMPED



9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

6" White Fir BRS N82°E, 26.15 FT TO A 60 penny nail in NNW base,
MKd C 1/4 S21 BT
5" P. Pine brs S50 1/2°E, 17.59 FT to a 60 penny nail in SW base,
MKd C 1/4 S21 BT.

10

Work Done By W. MILLER Title PLS Date 10/84 State Registration No. 2111
Plat or Certified Cor. Record Prepared? ☒ Yes No Filed At: Jeff. Co. Surveyor's Office Date 10/29/84
11/7/84

History
of
Surveys,
G.L.O.,
etc.

12

Index File No 11651

T. 12 S., R. 10 E., W.M.

Contract or Surv. No.


Cor. P-11 13

LAND CORNER RECORD
(Rectangular)

p-135680-2

1. T 12S R 10E No. P13 Cor. $\frac{1}{4}$ Mer. Will State Oregon N. F. Deschutes Dist. Sisters

2. Corner Status



7. Photo Identification

Photo No. _____

Ident. By: _____

8. Plane Coordinate Position Data

State _____ Zone _____

X _____

Y _____

Estab. By _____

Field Book No. _____

Where Filed _____

9. Evaluation

Authentic _____

Needs Verif. _____ Monument _____

Re-estab. _____ Survey _____

Land Status _____

3. Original Description Vol. _____ Page _____ Where Recorded _____

4. Description of Corners: Survey by Thomas C. Judkins under Contract No. 1400 dated July 5th, 1881. Set a trapstone, 12x8x6 ins., 8 ins. in ground, for $\frac{1}{4}$ sec. cor., marked $\frac{1}{4}$ on W face;
A Fir, 24 ins. diam., bears N52°E, 59 lks. dist., marked $\frac{1}{4}$ S BT.
A Fir, 18 ins. diam., bears S35°W, 6 lks. dist., marked $\frac{1}{4}$ S BT.

5. Investigation Notes: Found an 8" x 4" stone extending 11" above the ground in good condition marked $\frac{1}{4}$ on W face, *Firmly set 6" in ground*

Douglas Fir snag 30" diam. bears N56°45'E, 36.3 ft. dist. marked $\frac{1}{4}$ S. BT.

Douglas Fir, dead and down, 14" diam. bears S38°30'W, 5.2 ft. dist. marked $\frac{1}{4}$ S, BT.

Metal Poster on a White Fir, 3" diam., bears N27°45'E, 10 ft. dist.
Section Line Marker is on Spur Rd. #14, 327 ft. north. Distance is chained.

66.
24" STUMP - S35°W @ 42 - BT VISIBLE w/ DOWN FIR LOG ALONGSIDE MKD. 1/4 S BT.
24" FIR STUMP - N52°W - 39° - " " " " " "
60 1/2 L.


REC., 1983

6. Signed Calvin W. Minks Title Forestry Tech Date 5-31-62
S. CHAMBERLIN S. T. 1/11/82

PERPETUATION RECORD

10. Monument:

SET 2 1/2" X 30" A-C A.P., RISING 2" IN A MOUND OF STONES 2' Ø X 12" HIGH.



BURIED ORIGINAL STONE ALONGSIDE PIPE.

11. Accessories

12" WHITE FIR, S37 1/2° E 31 L., MKD. 1/4 S22 BT.

16" PONDEROSA PINE, N60° W 41 L., MKD. 1/4 S21 BT.

12. Set By R. OMAN Title CADAstral SURVEYOR
License COR-702 Agency for B.L.M. Date 1983

Field Book _____ Page _____
13. Recorded By _____ Volume _____ Page _____
(Agency)
(Date) (City) (County) (State)

14. Remarks:

Index
File No. _____
T 12S R. 10E
Merid. WILL.

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)


Tract or
Survey No. _____

Cor.
No. P-17

R.D. SISTERS County JEFFERSON
N.F. DESCHUTES State OREGON

E 1/4 COR. S. 22

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

2 BT'S FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature

Title

Division

Headquarters

Date

CHESTER M. BEIL, FORESTER


8-10-50

7100-52 (3 68)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____
Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. *P-17*

12
13

Index

File No. 0966

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey N^o.

Cor.

No. Q-09T 12 S. R. 10 E. R.D.SISTERS

County

JEFFERSON5/16

Cor. of

Merid. Willamette

N.F.

Deschutes

State

OregonSection 20+21

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

SFNF (None set)

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF (None set)

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At _____

Object Ident. _____

Ident. By _____

Signature _____

CORNER LEGEND:

FS or Unverified
Contr. Other

Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: _____

Title

Division

Headquarters

Date


W. MILLERPLSCSSO10/84

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET FROM SURVEY A 2 1/2" X 30" BCSP RISING 3"
in a stone mound, per BLM Manual of Instructions.

MONUMENT STAMPED



ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10" Cedar brs N 34° W, 8.33 ft. to a 60d nail in ENE base,
mkd. S 1/16 S 20 BT.
3" White Fir brs S 65° E, 12.74 ft to a 60-d nail in NNE base,
mkd X BT

Work Done By W. Miller Title PLS Date 10/84 State Registration No. 2111
Plat or Certified Cor. Record Prepared? ☒ Yes No Filed At: Jeff. Co. Surveyor's Office Date 10/29/84

History
of
Surveys,
G.L.O.,
etc.

Index File No. 0966 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. Q-09

Index

File No. 1166

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Contract or

Survey No.

Cor.

No.

Q-11T 12 S. R. 10 E. R.D. SISTERSCounty JEFFERSONSC 7/16 Cor. ofMerid. Willamette N.F. DeschutesState OregonSection 21

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

SFNF (Nothing set)

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF (Nothing Set)

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

85' North of Road.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified
Contr. Other

Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By:

W. Miller

Title

PLS

Division

CS

Headquarters

SO

Date


10/84

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set from survey a $2\frac{1}{2}" \times 30"$ BCSP rising 5" in
a stone ~~monument~~ collar, per BLM Manual of
Instructions

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" P. pine bds. S $86\frac{1}{2}^\circ$ E, 103.35 ft. to a 60-d nail in N. base,
mkd 'X' BT.

5" P. pine bds S 34° W, 69.50 ft to a 60-d nail in SE base,
mkd. 'X' BT.

Work Done By W. Miller Title PLS Date 10/84 State Registration No. 2111
Plat or Certified Cor. Record Prepared? ☒ (Yes) No Filed At: Jeff Co. Surveyor's Office Date 11/7/84

History of Surveys, G.L.O., etc.

Index File No. 0167 CORNER RECORD (SEARCH) Contract or BLM
 (Ref. FSM 7151.4) Survey No. 1000 Cor. No. R-01
 T 12 S. R. 10 E. R.D. Sisters County Jefferson SW Cor. of
 Merid. Willamette N.F. Deschutes State Oregon Section 19

CORNER DIAGRAM per legend
 S24 S19

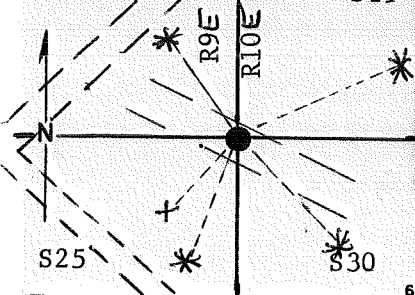


PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

CORNER LEGEND:

FS or Unverified
 Contr. Other
☐ ☐ Searched For/Not Found
☒ ☒ Evidence Found/Accept.
☒ ☒ Permanent Mon. Set/Fd.

DESCRIBE CORNER MONUMENT FOUND

SFNF - Corner falls in heavy cattled area between roads.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

28" P Pine, Visible, T12S, R7E, S25

SE Loc. in Old Roadbed

NW Loc. in Shldr. of Old Roadbed

NE Loc., a stump jumble

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Sign board 81⁰ ft. s. of cor., Road #1141 north to Road #1227,
 turn left (W'rly) proceed to Bear Springs, take right (N'rly)
 on Road #1137, proceed 1¹ mi. to sign board before junction
 corner located 50' N. of road.

Searched By: R. Taylor
 M. Heath


Title ST Division ENG, Headquarters SQ Date 5/2/83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2½ x 30" BCSP RSG, 3" in Md. of Stones, 4' diam. x 2½ H.,
+ 70' N. of Road 1141

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

7"PP BRS N71 3/4° E59⁵ ft. Mkd. T12S R10E S19 BT

12" WF BRS S39° E45⁶ ft. Mkd. T12S R10E S30 BT

11" WF BRS S11½° W44⁶ ft. Mkd. T12S R9E S25 BT

8" WF BRS N31° W25⁰ ft. Mkd. T12S R9E S24 BT

Work Done By R. Oman Title PLS Date 8/83 State Registration No. or Agency OR-702

Plat or Cor Record Prepared? Yes No Filed At BLM Co. X Surveyors Office Date

History of Surveys, G.L.O., etc.	12"P	14"P	Trap Stone 14 x 14 x 8 B8" 4 N on N, 2 on S
	N63W4L (2 ⁶)	N20E28L (18 ⁵)	1961: USGS FD. 1 standing BT
			in bulldozed area
	18"P	16"P	
	S25W47L (31 ⁰) S30E25L (16 ⁵)		

Index File No. 0167 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. R-01

Index
File No. 0567 CORNER RECORD (SEARCH) Contract or BLM
(Ref. FSM 7151.4) Survey No. 1000 Cor. No. R-05
T 12 S. R. 10 E. R.D. Sisters County Jefferson SE Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 19

CORNER DIAGRAM per legend
S19 S20

DESCRIBE CORNER MONUMENT FOUND
Stone 20 x 16 x 14, no notches VIS.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

36"PP N53W30⁰ VIS; T12 R10E S19

34"PP N55¹/₄N 30⁴ VIS; T12S R10E S

38"PP S45¹/₄N 30⁴ VIS; T12S

Cat trail through SE location

Placed Attn. signs on trees

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Near east edge of clearcut

480 ft. east of road marker

750 ft. west of road marker

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SC

Title ST

Division CS

Headquarters SO

Date 11/24/82


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG. 5" in mound of stone,

2' x 12" high. Buried stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10" WF BRS. N18 1/4° E 7 8/10 ft. mkd. T12S R10E S20 BT

5" WF BRS. S39 1/4° E 16 1/10 ft. mkd. X BT

10" WF BRS. S84° W 26 7/10 ft. mkd. T12S R10E S30 BT

12" WF BRS. N58° W 53 8/10 ft. mkd. T12S R10E S19 BT

Work Done By R. Oman Title PLS Date 8/83 State Registration No. OR-702
or Agency

Plat. or Certified Cor. Record Prepared? Yes No Filed At. BLM XXXXXXXXXXXXXX Co. Surveyors Office Date

History of Surveys, G.L.O., etc.	18"P	26"	Trap stone 15 x 14 x 9 B10"
	N57W29 04/100 (44L)	N50E23 10/100 (35L)	Mkd. 2 N on S. & 5N on E
	25"P	18"	1961: USGS FD. Stone & 4 BT's
	S40W28 38/100 (43L)	S77E21 78/100 (33L)	

Index File No. 0567 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. R-05

Index

File No. R9

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No. _____

Cor.

No. R-9T 12 S R. 10 E

R.D.

Sisters

County

JeffersonMerid. Willamette


N.F.

Deschutes

State

Oregon

CORNER DIAGRAM

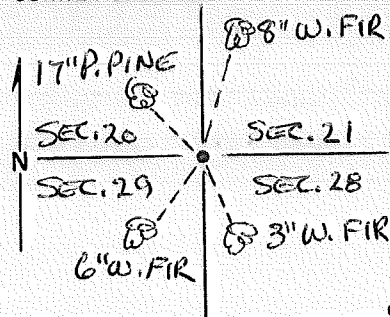

DESCRIBE CORNER MONUMENT FOUND

16" X 7" X 8" Stone rising 10" above ground level with 4 notches on north edge, and a #8 knitting needle alongside.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

S-28, a 22" fir, dead, scribed as called for.
 S-29, a 24" ponderosa pine with dead top, scribed as called for.
 S-20, a 17" ponderosa pine, scribed as called for.
 S-21, a 30" pine stump with toe blaze.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

Title

P.L.S.

Division

Headquarters

Date

25 Oct 74

7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set a 2 1/2" X 32" Brass-Capped galvanized steel pipe, rising 0" above ground level with original stone alongside in mound of stones.

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A 8" w.fir bears N 17 E 39.30 feet, B&S "SEC 21, BT"

A 3" w.fir bears S 16 E 22.73 feet, scribed "SEC 28, BT"

A 6" w.fir bears S 20 W 23.77 feet, scribed "SEC 29, BT"

10

Work Done By. R.E. Oman Title P.L.S. Date 25 Oct 74 State Registration No. OR-702
or Agency

Certified Cor. Record Prepared ? Yes No Filed At: Jefferson County Survey Record Date

11

REMARKS

12

Index File No.

T. 12S

R. 10E

M. Willamette

Tract or Surv. No.

Cor. R-9

13

Index

File No. 1161

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey No.

Cor.

No.

R-11T 12 S. R. 10 E.

R.D.

Sisters

County

JeffersonS/4

Cor. of

Merid. Willamette

N.F.


Deschutes

State

OregonSection 21

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

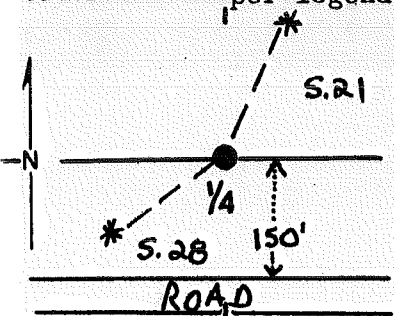SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

150' North of ROAD.

CORNER LEGEND:

FS or Unverified
Contr. Other

Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By:

W. Miller

Title

PLS

Division

CS

Headquarters

SO

Date


10/84.

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET BY PROPORTIONAL SURVEY A 2 1/2" X 30" BCSP
RISING 7" IN A STONE MOUND.

MONUMENT STAMPED



ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" and 10" twin cedars brs N 13° E @ 17.21 FT to A 60-d nail in
ESE base of 10" tree, mkd S/4 S21 BT.

8" P. pine brs. S 55 1/2° W @ 83.42 FT to a 60-d nail in NNW
base, mkd N/4 S28 BT

Work Done By W. Miller Title PLS Date 10/84 State Registration No. 2111
Plat or
Certified Cor. Record Prepared? ☒ Yes No Filed At: JEFF Co. Surveyor's Office Date 11/7/84

History of Surveys, G.L.O., etc.
Set a trap stone 12x9x7 ins, 8 ins in the ground, for
1/4 SEC. COR. MARKED 1/4 ON N. FACE, FROM WHICH:
A pine 14 ins. diam. brs N 60 E, 57 links dist.
A Pine 26 ins diam brs S 44 W, 68 links dist.

Index File No. 1167 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. R-11

LAND CORNER RECORD


5680-2

1367-1210-2

R-13

1. T 12S R 10E No. R13 Cor. Sec Mer. Will State Oregon N. F. Deschutes Dist. Sisters

2. Corner Status



7. Photo Identification

Photo No. _____

Ident. By: _____

8. Plane Coordinate Position Data

State _____ Zone _____

X _____

Y _____

Estab. By _____

Field Book No. _____

Where Filed _____

9. Evaluation

Authentic _____

Needs Verif. _____ Monument _____

Re-estab. _____ Survey _____

Land Status _____

3. Original Description Vol. _____ Page _____ Where Recorded _____

4. Description of Corners: Survey by Thomas C. Judkins under Contract No. 400 dated July 5th, 1881. Set a trap stone, 16x10x10 ins., 10 ins. in the ground, for cor. to secs. 21, 22, 27 and 28, marked with 2 notches on S and 3 notches on E edges:

STONES (LOTS) NEEDLE IN GROUND (see item 14.)

5. Investigation Notes: Found a rock in poor condition, notched and 1 Bearing tree. No Stone in 1983.

26" PINE STUMP - S63°E @ 8° - W/BURNT TOE BLADE S57½E 13½L.

25" FIR - S 23°W @ 9° - HEALED OVER (LOCATION TAG) S28½W 16L.

28" PINE STUMP IN N.W. LOCATION N38W 88L.
DOWN, BURNED LOG IN N.E. LOCATION N60°E 49L.

(SNOW ON GROUND)

REC, 1983

6. Signed S. CHAMBERLIN Title USGS Date 12-1-61
11/10/82

PERPETUATION RECORD

10. Monument:

SET 2 1/2 X 36" A.C.A.P., RISING 7" IN A MOUND OF STUNGS 2' Ø X 12" HIGH. T12S R10E

S21 S22
S28 S21
1983

11. Accessories

8" WHITE FIR, N10 1/2 E 31 L., MKD. T12S R10E S22 BT.

6" " " S40 E 137 1/2 L. " " " S27 "

9" " " S46 1/2 W 120 1/2 L. " " " S28 "

4" " " N76 W 31 1/2 L. " " " X BT

Field Book _____ Page _____

12. Set By R. OMAN Title CADASTRAL SURVEYOR
License (OR-702) Agency for B.L.M. Date 1983

13. Recorded By _____ Volume _____ Page _____
(Agency)
(Date) (City) (County) (State)

14. Remarks: Original notes indicate, from the stone:


A Cedar, 30 ins. diam., bears N60°E, 49 lks. dist., marked T12S, R10E, S22, BT.
" Pine, 26 " " " S63°E, 12 " " " " S27, "
" Fir, 14 " " " S23°W, 16 " " " " S28, "
" Pine, 24 " " " N43°W, 88 " " " " S21, "

LAND CORNER RECORD

5680-2

1. T. 12S R. 10E No. R17 Cor. Sec. Mer. Will State Oregon ^(Rectangular) N. F. Deschutes Dist. Sisters R-17

2. Corner Status



7. Photo Identification

Photo No. _____

Ident. By: _____

8. Plane Coordinate Position Data

State _____ Zone _____

X _____

Y _____

Estab. By _____

Field Book No. _____

Where Filed _____

9. Evaluation

Authentic _____

Needs Verif. _____ Monument _____

Re-estab. _____ Survey _____

Land Status _____

3. Original Description _____ Vol. _____ Page _____ Where Recorded _____

4. Description of Corners: Set a trap rock, 12x12x12 ins., 8 ins. in the ground, for cor. to sect. 22, 23, 26 and 27, marked with 2 notches on S and E edges:
(see below)

5. Investigation Notes: Found a notched rock in good condition and 2 Bearing trees.

#4. Continued: Original notes indicate that, from the stone:
A Pine, 20 ins. diam., bears N30°E, 32 lks., dist., marked T12S, R10E, S23, BT.
A Pine, 20 ins. diam., bears S68°E, 53 lks. dist., marked T12S, R10E, S26, BT.
A Pine, 18 ins. diam., bears S70°W, 82 lks. dist., marked T12S, R10E, S27, BT.
A Pine, 14 ins. diam., bears N62°W, 24 lks. dist., marked T12S, R10E, S22, BT.

6. Signed _____ Title USGS Date 12-1-61

PERPETUATION RECORD

10. Monument:

11. Accessories

12. Set By _____ Title _____ License _____ Agency _____ Date _____	Field Book _____ Page _____ 13. Recorded By _____ Volume _____ Page _____ (Agency) (Date) (City) (County) (State)
---	--

14. Remarks:

USDA-FOREST SERVICE

Index

File No. 2567

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)


Tract or

Survey No. _____

Cor.

No. R-25T 12S R. 10ER.D. GrasslandsCounty JettMerid. WMTN.F. OchState ORNE cor S, 25,

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

See R-01 T12S R11E
#5 SR w/cap

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agent _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature _____

Title _____

Division _____

Headquarters _____

Date _____

FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

By _____ Title _____ Date _____ State Registration No.
or Agency _____


or Record Prepared ? Yes No Filed At: _____ Date _____

REMARKS

No. T. R. M. Tract or Surv. No. Cor.

Index
File No. 0169 CORNER RECORD (SEARCH) Contract or
(Ref. FSM 7151.4) Survey No.Cor.
No. T-01T 12 S. R. 10 E. R.D. Sisters County Jefferson W14 Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 30

CORNER DIAGRAM, per legend

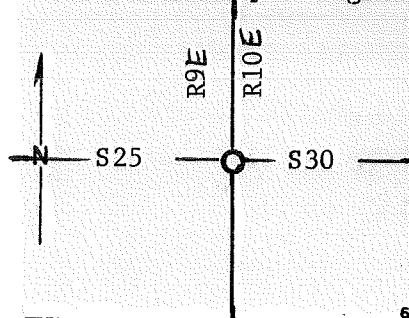

DESCRIBE CORNER MONUMENT FOUND

SENE - Lots of question. Able line trees. "Happy Hacker"

has chopped into various trees in area. Area logged with

many cat trails. Searched area by compass and hip chain from

24 F 19 Found Stone (Basalt) set firmly in the ground
25 30 No marks that I could discern.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Decaying Tam. windfall, N 80°E, 54 cks with

~~SENE~~ scribing visible.

6 36" P. pine, S22°W 55 cks, with faint ax marks

face has been heavily burned 36.1 ft. to face

37.1 ft to side center.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

W. Ham Ls 2396 12/10/91

Searched By: R. Taylor
M. Heath

Title

ST

Division ENG,

Headquarters

SQ


Date 5/2/83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

drove 24" rebar on N. Edge of stone.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Steel Fencepost 3 ft. South of cor.

Work Done By

Title

Date

State Registration No.
or Agency

Plat or

Certified Cor. Record Prepared? Yes

No

Filed At

Co. Surveyor's Office Date

Set Stone 12x10x8 ins

History mkd Va on W. Face,

of Tam 18" N78E 5t LKs

Surveys, P. 30" S 180W 55 LKs,

G.L.O., Both mkd Va S BT

etc.

30" P

S18W55L (36³)

18" TAM

Trap

stone 12 x 10 x 8 B8" Mkd. 1/4 W. Face

N78E54L (35⁶)

1956: Beil Fd. disturbed stone &

assumed SW BT, not opened,

an 11" PP

Index File No. 0169 T. 12 S., R. 10 E., W.M.

Contract or Surv. No. BLM
1000

Cor. T-01

Index

File No. 0569

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey No.

Cor. T-05
No.

T 12 S. R. 10 E. R.D. Sisters

County Jefferson

E/4

Cor. of

Merid. Willamette

N.F. Deschutes

State Oregon

Section 30

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

SF/NF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SF/NF

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Loc. sign at Road Int. #1152 & Spur North, 590' S. to

search location. Heavy logged area - If stone ever found

would be suspected transportation - must have semblance of

BT's.

Searched By: RED

Title PLS

Division CS


Headquarters SO

Date 7/83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Plat or Cor. Record Prepared? Yes No Filed At _____ Co. Surveyor's Office Date _____

History of Surveys, G.L.O., etc.	24"P	Trap stone 14x12x6 B8" mkd 1/4 on W. Face
	N20E26L (17 ¹⁶)	1956: Beil Fd. Stone RSG. 10" Mkd.,
		S29 = 20"PP, D&D, Mkd. 1/4 BT
	24"P	Loc. Mkr. on 23" DF (W.S.D.) S86°W25 ²³ ft.
	S40W78L (51 ⁴⁸)	Loc. Mkr. 15 CH. S on Logging Road

Index File No. 0569 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. T-05


Index
File No. T 9
T 12 S R. 10 E
Merid. Willamette

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or
Survey No. _____
Cor. No. T-9
w/4 Cor. 5.28

R.D. Sisters County Jefferson
N.F. Deschutes State Oregon

CORNER DIAGRAM

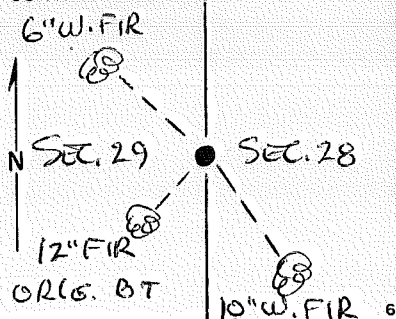

DESCRIBE CORNER MONUMENT FOUND

A blue-painted stone amongst pile of stones with "1/4" chiselled on north face.

2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

S-29, a 12" Fir, dead, scribed as called for.

3

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

8

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

about 270 east of Forest Road 1227-A

4

Signature

Title
P.L.S.

Division

Headquarters

Date

7100-52 (3/68)

5

25 Oct 74

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2 1/2" X 32" brass-capped galvanized steel pipe, rising 6" above ground level, in mound of stones, stamped " 1/4 SEC. COR., 29/28, R.E. Oman PLS OR-702". Placed original corner stone in stone mound.

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

a 6" White Fir bears N 62 W 36.22 feet, B&S " S 29, 1/4, BT"
a 10" White Fir bears S 52 1/2 E 48.01 feet, B&S "28, 1/4, BT"

10

Work Done By. R.E. OMAN Title P.L.S. Date 25 Oct 24 State Registration No. OR-702
or Agency

Certified Cor. Record Prepared ? Yes No Filed At: Jefferson County Survey Record Date

11

REMARKS

12

Index File No. T. 12 S R. 10 E M. Willamette Tract or Surv. No. Cor. T-9

13

Index
File No. 0171 CORNER RECORD (SEARCH) Contract or BLM
(Ref. FSM 7151.4) Survey No. 1000 Cor. No. V-01
T 12 S. R. 10 E. R.D. Sisters County Jefferson SW Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 30

CORNER DIAGRAM, per legend

S25 S30

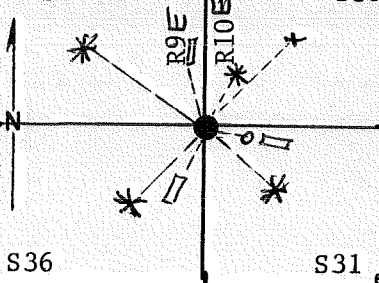


PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

CORNER LEGEND:

FS or Unverified
Contr. Other
○ ◇ Searched For/Not Found
⊗ ⊗ Evidence Found/Accept.
● ◆ Permanent Mon. Set/Fd.

DESCRIBE CORNER MONUMENT FOUND

Stone, 14 x 13 x 12 RSG, 9" with 5 notches on top,
obviously disturbed.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

18" TAM. stump S73½E⁰ VIS.: T12S R11E S31 on log, BT on stump
33"PP 41⁰ VIS.: T R E S30 BT, N36⁰E
Rotted windthrown log, no marks visible S21½⁰W 8³

16" windthrown TAM, log N14½⁰W VIS: T12S R10E S36 BT - Root Hole
Placed Attn. signs on trees @ 14³

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Loc. Mkr. 870' E. of COR. on Rd.

Loc. Mkr. 160' S of COR. on Rd.

Searched By: SC

Title ST Division CS Headquarters SQ Date 11/23/82


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2 1/2" x 30" BCSP RSG, 3" in mound of stone.

Buried original stone at NW side of pipe.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

7" WF BRS. N15 1/4° E 9 15 ft. mkd. T12S R10E S30 BT

5" WF BRS. S45 1/2° E 18 9 ft. mkd. X BT

7" WF BRS. S44° W 17 8 ft. mkd. T12S R9E S36 BT

13" WF BRS. N54° W 36 9 ft. mkd. T12S R9E S25 BT

Work Done By R. Oman Title PLS Date 8/83 State Registration No. OR-702
or Agency

Plat or Cor. Record Prepared? Yes ☐ No ☒ Filed At BLM ~~XXXXXXX~~ Office Date

History of Surveys, G.L.O., etc.	22" TAM	26"P	Basalt stone 16 x 16 x 16 B10" 5 N on N, 1 on S
	N15W13 9 (21L)	N37E41 6 (63L)	1956: Beil Fd. notched stone RSG. 5",
			S.25 = 20" WL; S30 = 29"PP
	20"P	22" TAM	S.31 = 15" WL; S.36 = 22"PP
	S20W7 9 (12L)	S70E5 3 (8L)	Loc. Mkr. 150' S. of Cor.

Index File No. 0171 T. 12S., R. 10 E., W.M.

Contract or Surv. No.

Cor. y-01

Index
File No. 0371 CORNER RECORD (SEARCH) Contract or BLM
(Ref. FSM 7151.4) Survey No. 1000 Cor. No. V-03
T 12 S. R. 10 E. R.D. Sisters County Jefferson S/4 Cor. of
Merid. Willamette N.F. Deschutes State Oregon Section 30

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

S30

S31

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

24"PP N62E12⁰ VIS.: 1/4S BT (18L)25"PP S80W35⁰ VIS.: 1/4S BT (53L)

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

Placed Attn. signs on trees

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

130' E. of marker on Road 1140

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By:

SC

Title

ST

Division

CS

Headquarters

SQ


Date 11/23/82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

2⁴" x 30" BCSP RSG. 4" in mound of stone, 2' x 15" high.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A 25" PP brs S82°W 42² ft. mkd. 1/4S BT (orig.)

A 24" PP brs N553/4°E 13¹ ft. mkd. 1/4S BT (orig.)

(VAR. E. by solar OBS. = 19°11')

Work Done By R. Oman Title PLS Date 19 July 83 State Registration No. OR-702

Platform Certified Cor. Record Prepared? (Yes) No Filed At. BLM ~~XXXXXX~~ Office Date

History of Surveys, G.L.O., etc. 24" Basalt stone 12x10x8 B8" 1/4 on W. Face
N62E12⁵⁴ (19L) 1956: Beil Fd. stone RSG. 10", mkd.
26" P S.30 = 22" PP mkd. 1/4S BT
S.31 = 23" PP mkd. 1/4S BT

S80W40⁹² (62L)

Loc. Mkr. 1004' E. of Cor. of Green R₂

Index File No Q371 T. 12 S., R. 10 E., W.M.

Contract or Surv. No.

Cor. Rd. 13

Index

File No. 0571

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey No.

Cor. V-05

T 12 S. R. 10 E. R.D.

Sisters

County

Jefferson

SE

Cor. of

Merid. Willamette

N.F. Deschutes

State Oregon

Section 30

CORNER DIAGRAM: per legend

S30

S29

DESCRIBE CORNER MONUMENT FOUND

SF/NF

S31

S32

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SF/NF

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Old cutting area - If stone ever found, would be suspected

transportation - Must have semblance of BT's.

1956: Loc. Mkr. on Log Rd. 25 CH N (1650') - FD. 1983

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: REO

Title PLS

Division CS


Headquarters SO

Date 7/83

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Plat or Cor. Record Prepared? Yes No Filed At _____ Co. Surveyor's Office Date _____

History of Surveys, G.L.O., etc.	30"P	24" TAM	Basalt stone 14x14x12 B8" 1 N on S & 5 N on E
	N60W27 ⁰⁶ (41L)	N12E66 ⁰ (100L)	1956: Beil Fd. notched stone RSG. 12",
	14"P	18"F	S.30 = 35"PP, all mks.; S.29 = 23" WL, all mks
	S62W38 ⁹⁴ (59L)	S45E13 ²⁰ (20L)	S.32 = 26"DF, D&D, Face Down; S.31=16"PP, D&D
	Loc. Mkr. on 4"WF N1 ⁰ E 7 ⁸ ft.		

Index File No. 0571 T. 12 S., R. 10 E., W.M. Contract or Surv. No. Cor. V-05

Index

File No. 0771

CORNER RECORD (SEARCH)

Contract or

BLM

Cor. No. V-07

T 12 S. R. 10 E. R.D.

Sisters

County

Survey No. Jefferson

1000

S/4

Cor. of

Merid. Willamette

N.F. Deschutes

State Oregon

Section

29

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

Stone 18 x 16 x 12 RSG. 8", Mkd. $\frac{1}{4}$ on W. Face,
Well bedded

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
32" PP, sawn stump, VIS. BT Blade N58° E 8⁰ ft.
28" stump, sawn, with axe marks S75° W 39³ ft.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

CORNER LEGEND:

FS or Unverified

Contr. Other



Searched For/Not Found



Evidence Found/Accept.



Permanent Mon. Set/Fd.

Searched By: SC

Title ST

Division CS

Headquarters SQ


Date 12/2/82

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Replaced original stone with 2 1/2" x 30" BCSP
 Rising 8" in a mound of stone, 2' x 12" high.
 Buried original stone alongside pipe.

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" WF BRS. N 1/4 E 19 2/3 ft. mkd. X BT
 10" WF BRS. S 27 3/4 W 25 0/10 ft. mkd. 1/4 S 32 BT

Work Done By R. Oman Title PLS Date 8/83 State Registration No. OR-702
 or Agency

Plat or Cor. Record Prepared? (Yes) No XXXXXXX Filed At BLM XXXXXXX Office Date

History of Surveys, G.L.O., etc.
 30"P TRACHYTE Stone 18x16x12 B12", 1/4 on N. Face
 N55E60 (10L) 1956: Beil Fd. stone RSG. 10", mkd.
 S.29 = 36"PP, stump mkd. BT
 22"P S.32 = 22"PP, mkd. 1/4S BT
 S75W38 28 (58L)

Index File No. 0771 T. 12 S., R. 10 E., W.M. Contract or Surv. No. BLM Cor. V-07
1000

Index

File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)


Tract or

Survey No. _____

Cor.

No. V-9T 12 S R. 10 ER.D. SistersCounty JeffersonMerid. WillametteN.F. DeschutesState Oregon

CORNER DIAGRAM

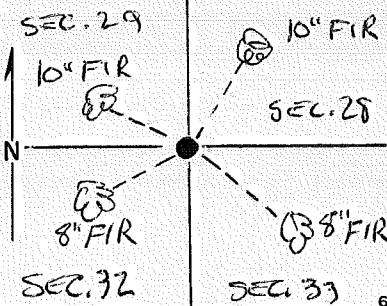

DESCRIBE CORNER MONUMENT FOUND

A blue-painted stone, 8" X 8" X 11", a #10 Knitting needle, and a 1 1/2" Ø X 4' pole at approx. corner-- found 18" X 8" X 16" basalt stone about 1.0 foot below ground, as called for.

2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

S-28, a 20" Fir Snag, scribed as called for.

S-33, a large Pine, dead and down, with axe marks on underside any scribes rotted out.

S-32, a 24" Fir in call location; hacked too deep to read scribing.

S-29, a 25" tamarack stump in call location, no visible markings.

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

About 200 feet east of Forest Road 1227. Section line board on west side of road.

4

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

7

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

8

Signature

Title

P.L.S.

Division

Headquarters

Date

7100-52 (3/68)

5

25 Oct 74

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2 1/2" X 32" Brass-capped galvanized steel pipe, rising 2" above ground level, stamped "T 12 S, R 10 E, SEC. COR., 29, 28, 30, 32, R.E. Oman PLS OR-702". Original corner stone set into ground as pipe support.

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

a 10" Fir bears N 30 E 30.27 feet, B&S " SEC 28, BT"
a 8 " Fir bears S 58 E 30.71 feet, B&S " SEC 33, BT"
a 8 " Fir bears S 70 W 19.69 feet, B&S "SEC 32, BT"
a 10" Fir bears N 75 W 22.11 feet, B&S "SEC 29, BT"

10

Work Done By R.E. Oman Title P.L.S. Date 25 Oct 74 State Registration No. OR-702
or Agency

Certified Cor. Record Prepared ? Yes No Filed At: Jefferson County Survey Record Date

11

REMARKS

12

Index File No. T. 12 S R. 10 E M. Willamette Tract or Surv. No.

Cor. V-9

13

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No.

T 125 R. 10ER.D. SISTERS

County

JEFFERSONSEC. CDE.Merid. WILL.N.F. DESCHUTES

State

OREGON

CORNER DIAGRAM




PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency _____

Signature _____

Title _____

Division _____

Headquarters _____

Date _____

7100-52 (3 68)

CHESTER M. BEIL FORESTER11-10-53

DESCRIBE CORNER MONUMENT FOUND

STONE 12 X 12 X 10 IN PLACE IN GRD.

PILE OF 4 ROCKS 4" ABOVE GRD.

MKD. WITH ONE NOTCH ON S FACE, 3 NOTCHES ON E FACE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A 34" P.PINE STUMP N65°E 20'10" MKD "BT"

A 44" P.PINE STUMP N78°W 76'8" MKD "BT"

A 22" P.PINE STUMP S55°E 22'10" MKD "BT"

A 22" P.PINE S15°W 21'9" MKD "T12S RIDE S "DEAD & DOWN W/SCRIBING UP

22" STUMP ROLLED OUT OF ORIG. POSITION WHICH WAS S45°E 40 FT.


DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

METAL LOCATION POSTER ON P.PINE 10" FROM WHICH CORNER BEARS S58°W 47'6"

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



9

ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. V-13

13

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No. V-15T 12S R. 10ER.D. SISTERS


County

JEFFERSONS 1/4Cor. S. 27Merid. WILL.N.F. DESCHUTES

State

OREGON

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

STONE IN PLACE PARTLY IN GRD. RISING 6"
ABOVE GRD.MKD. "1/4" ON N. FACE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

1 BT FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

AgencySignatureTitleDivisionHeadquartersDate


7100-52 (3 68)

CHESTER M. BEIL FORESTER3-7-51

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

12

Index File No.

T.

R.

M.


Tract or Surv. No.

Cor. V-15

13

File No. _____ Tract or
T. 125 R. 1DE (Ref. FSM 7151.4) Survey No. _____ Cor. No. V-17
Merid. WILL R.D. SISTERS County JEFFERSON SEC. COR. _____
N.F. DESCHUTES State OREGON

CORNER DIAGRAM



1 DESCRIBE CORNER MONUMENT FOUND

2 DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

ONE BT FOUND

6 PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

7 PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

3 DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

8 Signature

Title

Division

Headquarters

Date

CHESTER M. BEIL FORESTER


8-1-50

7100-52 (3 63)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____ 11

REMARKS

12

Index File No. T. R. M. Tract or Surv. No. Cor. V-17 13

Index File No. <u>X-1</u>	CORNER RECORD (SEARCH) (Ref. FSM 7151.4)	Tract or Survey No. _____	Cor. No. <u>X-1</u>
T <u>12 S. R. 10 E.</u>	R.D. <u>SISTERS</u>	County <u>JEFFERSON</u>	<u>W/4</u> Cor. <u>SEC. 31</u>
Merid. <u>WILLAMETTE</u>	N.F. <u>DESCHUTES</u>	State <u>OREGON</u>	_____

SEE T 12S, 9E

X-25

~~EV. FD.~~ BC SET 1980
BY REO

Index File No.	<u>X-1</u>	CORNER RECORD (SEARCH) (Ref. FSM 7151.4)		Tract or Survey No.	Cor. No.
	<u>12 S. R. 10 E.</u>	R.D.	<u>SISTERS</u>	County	<u>JEFFERSON</u>
Merid.	<u>WILLAMETTE</u>	N.F.	<u>DESCHUTES</u>	State	<u>OREGON</u>
					<u>W/4 COR. SEC. 31</u>

SEE T 12S, 9E

X-25

~~EV. FD.~~ BC SET 1980
BY REO

Index File No. <u>X-1</u>	CORNER RECORD (SEARCH) (Ref. FSM 7151.4)	Tract or Survey No. _____	Cor. No. <u>X-1</u>
T <u>12 S. R. 10 E.</u>	R.D. <u>SISTERS</u>	County <u>JEFFERSON</u>	<u>W/4</u> Cor. <u>SEC. 31</u>
Merid. <u>WILLAMETTE</u>	N.F. <u>DESCHUTES</u>	State <u>OREGON</u>	

SEE T 12S, 9E

X-25

~~EV. FD.~~ BC SET 1980
BY REO

USDA-FOREST SERVICE

Index

File No. 0973

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)


Tract or

Survey No.

Cor.

No. X-09T 12 S. R. 10 E. R.D. SISTERS County JEFFERSON E/A COR. SEC. 32Merid. WILLAMETTE N.F. DESCHUTES State OREGON W/4 COR. SEC. 33

CORNER DIAGRAM

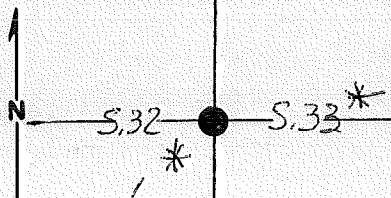

DESCRIBE CORNER MONUMENT FOUND

STONE 18 x 16 x 14 ASG. 10" ABOVE GROUND
MHD. 1/4

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

2 BTs, SCRIBING VISIBLE

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature N. KRAFT.Title S. A.

Division _____

Headquarters 50Date 10/80 D-7100-52 (10/78)


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET 2 1/2" X 32" BRASS-CAPPED STEEL PIPE

RISEING 6" IN A MOUND OF STONES.

HALF-BURIED ORIG. STONE AT NE SIDE OF PIPE



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

26" P. PINE BRS. S48°W 82 FT MKD 1/4 S (ORIG. 1BT)

36" P. PINE BRS. N81°E 64 1/2 FT MKD 1/4 S (ORIG. BT)

Work Done By R.OMAN Title PLS Date 10/80 State Registration No. or Agency OR-702 10

Certified Cor. Record Prepared? ☒ Yes No Filed At: JEFF. CO. SURV. OFFICE Date 11/80 11

REMARKS

Index File No. 0973 T.12 S., R. 10 E., W.M.

Tract or Surv. No.

Cor. X-09 12 13

USDA-FOREST SERVICE

Index
File No. 0973

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)


Tract or
Survey No. _____

Cor. No. X-09

T 12 S. R. 10 E. R.D. SISTERS County JEFFERSON E/4 COR. SEC. 32

Merid. WILLAMETTE N.F. DESCHUTES State OREGON W/4 COR. SEC. 33

CORNER DIAGRAM

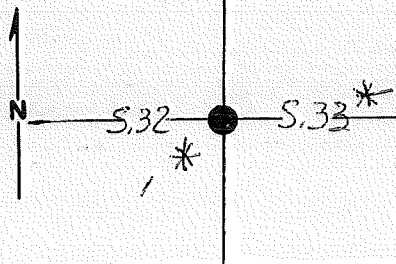

DESCRIBE CORNER MONUMENT FOUND

STONE 18 x 16 x 14 RSG. 10" ABOVE GROUND
MHD. 1/4

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

2 BTs, SCRIBING VISIBLE

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

Signature N. KRAFT.

Title S. A.

Division _____


Headquarters 50

Date 10/80 D-7100-52 (10/78)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET 2 1/2" X 32" BRASS-CAPPED STEEL PIPE
 RISING 6" IN A MOUND OF STONES.
 HALF-BURIED ORIG. STONE AT NE SIDE
 OF PIPE



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

26" P. PINE BRS. S48°W 82 FT MKD 1/4 S (ORIG. BT)

36" P. PINE BRS. N81°E 64 FT MKD 1/4 S (ORIG. BT)

Work Done By R. OMAN Title PLS Date 10/80 State Registration No. or Agency OR-702

Certified Cor. Record Prepared? ☒ Yes ☐ No Filed At JEFF. CO. SURV. OFFICE Date 11/80

REMARKS

Index File No. 0973 T. 12 S., R. 10 E., W.M.

Tract or Surv. No.

Cor. X-09

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No. X-13T 125 R. 10EMerid. Will.R.D. SISTERS


County

JEFFERSONN.F. DESCHUTES

State

OREGONE 1/4 COR. S. 33

CORNER DIAGRAM

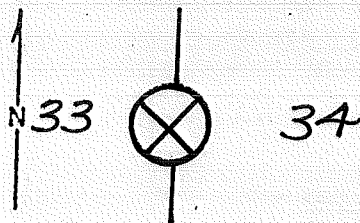

DESCRIBE CORNER MONUMENT FOUND

STONE PLACED IN GRD. ABOUT 6"
 RISING 4" ABOVE GRD.

MKD. "1/4" ON W. FACE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A 30" P. PINE STUMP S78°W 7'10" MKD "BT"
 ALSO HAS A SEC. COR. MARKER ON IT

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

7

A 33" P. PINE STUMP N72°E 29'11" ~~BT~~ SCRIBING
 NOT LEGIBLE

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

METAL LOCATION TAG ON 9" INCENSE CEDAR.
 CORNER BEARS N32°W 21'6"

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Etab. By _____

Agency

8

Signature

Title

Division

Headquarters

Date


4

7100-52 (3 63)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At _____ Date _____

11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. **X-13** 13

Index
File No. 0175 CORNER RECORD (SEARCH)
(Ref. FSM 7151.4) Tract or
Survey No. 2-1 Cor.
No. 2-1
T 12 S. R. 10 E. R.D. SISTERS County JEFFERSON SW COR SEC 31
Merid. WILLAMETTE N.F. DESCHUTES State OREGON

SEE T13S R10E

A-1

~~SF/NF~~
~~Rt Oman~~

BCSP by w. Miller 8/89

Index
File No. 0175
Tract or Survey No. 2-1
Cor. No. 2-1
CORNERS RECORD (SEARCH)
(Ref. FSM 7151.4)
R.D. SISTERS County JEFFERSON SW COR SEC 31
Merid. WILLAMETTE N.F. DESCHUTES State OREGON

SEE T135 RIDE

A-1

~~SF / NF~~
~~R / Oman~~

BCSP by W. Miller 8/89

Index	CORNER RECORD (SEARCH)		Tract or	Cor.
File No. <u>0375</u>	(Ref. FSM 7151.4)		Survey No. _____	No. <u>2-03</u>
<u>12</u> S. R. <u>10</u> E. R.D. <u>SISTERS</u>	County <u>JEFFERSON</u>	<u>S/4 COR. SEC. 31</u>		
Merid. <u>WILLAMETTE</u> N.F. <u>DESCHUTES</u>	State <u>OREGON</u>	<u>N/4 COR. SEC. 6</u>		

JEE: A-03

T135 P10E

BC Set 1980
by RED

Index File No.	<u>0375</u>	CORNER RECORD (SEARCH) (Ref. FSM 7151.4)		Tract or Survey No.	Cor. No. <u>2-03</u>
<u>12</u> S. R. <u>10</u> E.	R.D. <u>SISTERS</u>	County <u>JEFFERSON</u>	S/4 COR. SEC. 31		
Merid. <u>WILLAMETTE</u>	N.F. <u>DESCHUTES</u>	State <u>OREGON</u>	N/4 COR. SEC. 6		

JEE: A-03

T13S R10E

BC Set 1980
by REO

2-03

Index

File No.

0375

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No.

2-03

T 12 S. R. 10 E.

R.D.

SISTERS

County

JEFFERSON

5/4 COR. SEC. 31

Merid. WILLAMETTE

N.F.

DESCHUTES

State

OREGON

N/4 COR. SEC. 6

JEE: A-03

T13S R10E

BC Set 1980
by REO

Index File No. <u>0575</u>		CORNER RECORD (SEARCH) (Ref. FSM 7151.4)		Tract or Survey No. _____		Cor. No. <u>2-05</u>	
<u>12</u> S. R. <u>10</u> E.		R.D. <u>SISTERS</u>		County <u>JEFFERSON</u>		SW COR SEC. 32	
Merid. <u>WILLAMETTE</u>		N.F. <u>DESCHUTES</u>		State <u>OREGON</u>		NE COR SEC. 6	

SEE: A-05
T135 R106

BC Set 1980
By REO

Z-05

Index

File No.

0575

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No.

2-05

T 12 S. R. 10 E.

R.D.

SISTERS

County

JEFFERSON

SW COR SEC. 32

Merid.

WILLAMETTE

N.F.

DESCHUTES

State

OREGON

NE COR SEC. 6

SEE: A-05
T135 R10E

BC Set 1980
By REO

Index

File No. 0775

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or
Survey No. _____

Cor.
No. Z-07

T 12 S. R. 10 E. R.D. SISTERS County JEFFERSON 3/4 COR. SEC. 32

Merid. WILLAMETTE N.F. DESCHUTES State OREGON N/4 COR. SEC. 5

SEE: A-07

T13S R10E

BC set 1980
by KEO

Index

File No.

0975

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No.

Cor.

No.

Z-09

T 12

S. R. 10

E.

R.D.

SISTERS

County

JEFFERSON

SW COR. SEC. 33

Merid.

WILLAMETTE

N.F.

DESCHUTES

State

OREGON

NE COR. SEC. 5


SEE: A-09

T135 BCOE

BC set 1980
by RED

CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. Cor. No. 2-13
File No. 125 R. 10E R.D. SISTERS County JEFFERSON
Merid. N.F. State

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

STONE TURNED ON END, ABOUT 4" IN GRD.
RISING 10" ABOVE GRD.
3 NOTCHES ON W. FACE, 3 NOTCHES ON E. FACE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A 23" P. PINE S47°W 80 FT. MKD. "T13S R10E S4 BT"
A 36" P. PINE N74°W 70 FT. MKD. "T12S R10E S33"
DEAD & DOWN
A 25" P. PINE N56°E 59 FT. MKD. "T12S R10E S BT"

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Etab. By _____
Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

METAL LOCATION POSTER ON 8" P. PINE. CORNER
BEARS S81°W 9'11"

Signature

Title

Division

Headquarters

Date

7100-52 (3 63)

CHESTER M. BEIL


FORESTER

11-5-53

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

REMARKS


Index File No. T. R. M. Tract or Surv. No. Cor. 2-13

Index
File No. _____
T 125 R. 10E
Merid. WILLAMETTE

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or
Survey No. _____
Cor.
No. 2-15
R.D. SISTERS County JEFFERSON
N.F. DESCHUTES State OREGON
1/4 COR.

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

ROCK IN PLACE MKD. "1/4" ON N. FACE IN
4 ROCKS PILED TOGETHER RISING 7" ABOVE GROUND

ROCK IS ABOUT 12" X 10" X 10"

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A 24" P. PINE S 82° W 18' 9" MKD. "1/4 S BT"

A 32" P. PINE STUMP N 72° E 39' 5" MKD. "BT"

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER
METAL LOCATION POSTER ON 15" P. PINE ON S. SIDE
OF TREE. CORNER BEARS S 4° W 13 1/2"

SECTION MARKER ON TREE ON SQUAW BACK RIDGE RD.
#115 LOCATED 9 CHAINS E. OF 1/4 COR.

Signature

CHESTER M. BEIL

Title

FORESTER

Division

Headquarters

Date


11-4-53

7100-52 (3 53)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED:

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By. _____ Title _____ Date _____ State Registration No.
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor. 2-15

12

13

Index

File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No. _____

Cor.

No. 2-17T 12S R. 10ER.D. SISTERS

County

JEFFERSON

SEC. COR.

Merid. WILL.N.F. DESCHUTES

State

OREGON

CORNER DIAGRAM




PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

DESCRIBE CORNER MONUMENT FOUND

STONE 14 X 14 X 12 IN PLACE IN 3 ROCKS
PILED TOGETHER. 6" ABOVE GRD.

MKD. WITH 2 NOTCHES ON E. FACE

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A 26" P. PINE S5°E 48'3" MKD. "T13S R10E S3 BT" TAG POSTED
BY OR. ST. BD. OF FORESTRY

A 28" P. PINE S68°W 26 FT. MKD. "T13S R10E S1 BT" (APPEARS TO

HAVE A "S4" SCRIBED ON IT, BUT IT SHOULD BE AN "S3" WHEN
CHECKED W/CORNER 1 MI. SOUTH. STANDING & DEAD

A 28" P. PINE N40°W 35'9" MKD. "T12S R10E S34 BT" DEAD & DOWN

A 29" P. PINE STUMP N27°E 58'10" MKD. "BT" STUMP 10" HIGH

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

METAL LOCATION POSTER ON 26" P. PINE ON N. SIDE OF
TREE. CORNER BEARS N5°W 48'3"

SECTION LINE MARKER ON TREE ON SQUAW BACK RIDGE
RD #115 25 CHAINS W. OF SEC. COR.

Signature

CHESTER M. BEIL

Title

FORESTER

Division

Headquarters

Date


11-5-53

7100-52 (3 68)

CORNER RECORD (PERPETUATION)

MONUMENT
STAMPED -

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

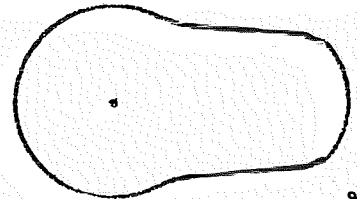

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. _____
or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

Index File No. T. R. M. Tract or Surv. No. Cor. 2-1

12

13

Index
File No. 2575

CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Contract or
Survey No. 2-75

T 12 S. R. 10 E. R.D. Sisters County Jell. SE Cor. of
Merid. WILLAMETTE N.F. DESCHUTES State OREGON Section 36

SEE: A-01 T. 13 S., R. 11 E., W.M.

#5 SR w/plastic cap

