


T 26S., R 7E., M Wil

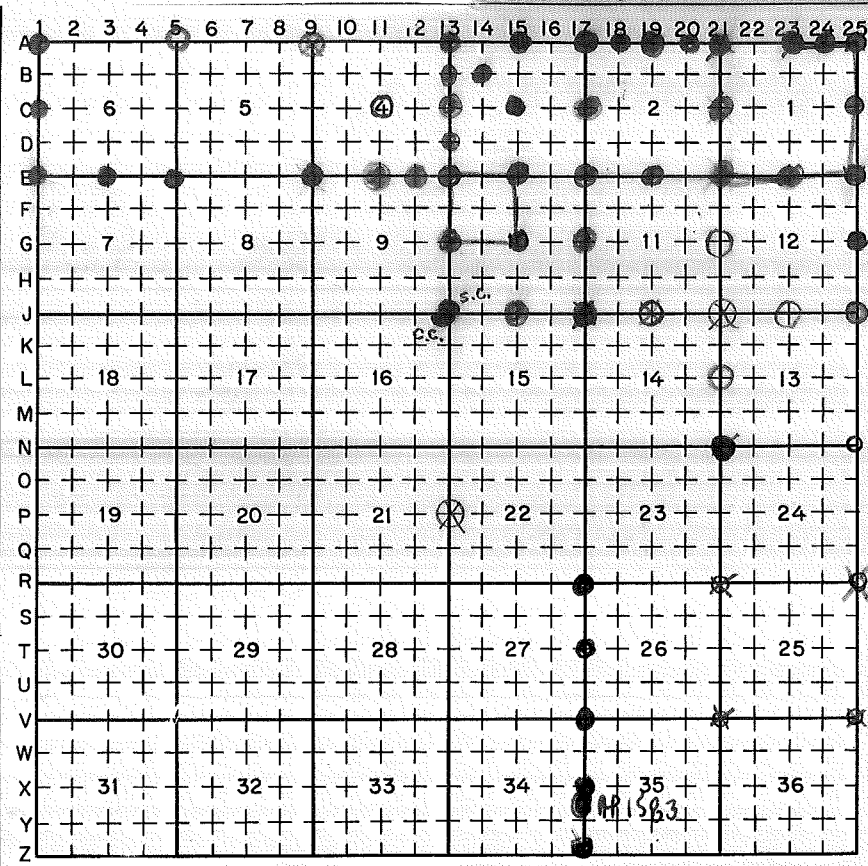

LEGEND

○ = Corner having information on form 7100-52 in this file.

Ledgend Conforms to Reporting Forms MPB 2/80

FILING INSTRUCTION

File 7100-52 card record by letter and number coordinates behind the file guide for the township in which it falls.

File the 7100-52 card record by letter and then by number i.e., all A cards first, then B cards etc.

The first card behind the file guide (if data have been obtained and recorded) will be card A-1 for N.W. Township Corner, then card A-2 for 1/16 corner then card A-3 for 1/4 corner etc.

Index
File No. A-01

CORNER RECORD (SEARCH) Contract or
(Ref. FSM 7151.4) Survey No. _____
R.D. CRESCENT County KLAM.


Cor.
No. 0151
POL 4 Cor. of
Section 6

T 26 S. R. 7 E.
Merid. Willamette

N.F. Deschutes State Oregon

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

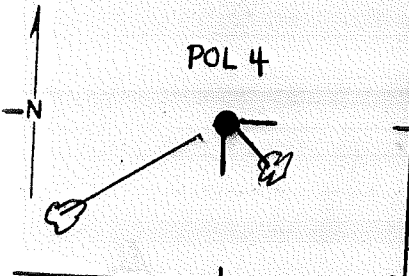

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

- CORNER LEGEND:
- | | | | |
|----------------------------------|-------------------------------------|------------------------|--|
| FS or | Unverified | | |
| Constr. | Other | | |
| <input type="radio"/> | <input type="checkbox"/> | Searched For/Not Found | |
| <input checked="" type="radio"/> | <input checked="" type="checkbox"/> | Evidence Found/Accept. | |
| <input checked="" type="radio"/> | <input checked="" type="checkbox"/> | Permanent Mon. Set/Pd. | |

Searched By: FAST

Title PLS Division _____ Headquarters _____ Date 7/89

CORNER RECORD (PERPETUATION)


MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET. 5/8" x 30" I.R. WITH 1 1/2" ALUM CAP.

RSG. 0.3 FT.

SET GALV. STEEL POST 4.0 FT SOUTH W/LSM

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

9" L. PINE S52°W - 31.7 FT. (X BOT)

8" L. PINE S43°E - 3.0 FT (X BOT)

Work Done By FAST

Title PLS

Date 9/89

State Registration No. or Agency

PLS-1938

Plat No

Record Prepared? Yes

No

Filed At

Co. Surveyor's Office Date

History

of

Surveys,

G.L.O.,

etc.

Index File No

A-01

T. 26 S., R. 8 E., W.M.

Contract or Surv. No

Cor.

10

11

12

D-7100-52 d (10/78)
USDA-FOREST SERVICE

Index
File No. 0551

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Contract or
Survey No. _____

Cor.
No. A-05

T 26 S. R. 7 E. R.D. Crescent

County Klamath

Cor. of
NW

Merid. WILLAMETTE

N.F. DESCHUTES

State OREGON

Section 5

SEE: Z-05 T. 25 S., R. 7 E., W.M.

SF/NF



Index
File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or
Survey No. _____

Cor.
No. A-9

26s. R. 7 E. R.D. _____

CRESCENT

County

DESCHUTES

Merid. WILLAMETTE N.F. _____

DESCHUTES

State

OREGON

SEE 2-9

T25S R7E



Metal fence
post set by
Bruce Rogers 1973

A-9

Index

File No. _____

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____ Cor. No. A-13

T 25 S. R. 7 E. R.D. CRESCENT County DESCHUTES

Merid. WILLAMETTE N.F. DESCHUTES State OREGON SEC. COR.

SEE Z-13
T25S R7E

*B.C.
Bruce Rogers
1973*

A-13

Index
File No. 1551

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____ Cor. No. A-15


T 26 S. R. 7 E. R.D. CRESCENT County KLAMATH

Merid. WILLAMETTE N.F. DESCHUTES State OREGON

SEE T. 25 S - R. 7 E.

Z-15

BC SET BY EG, 1981

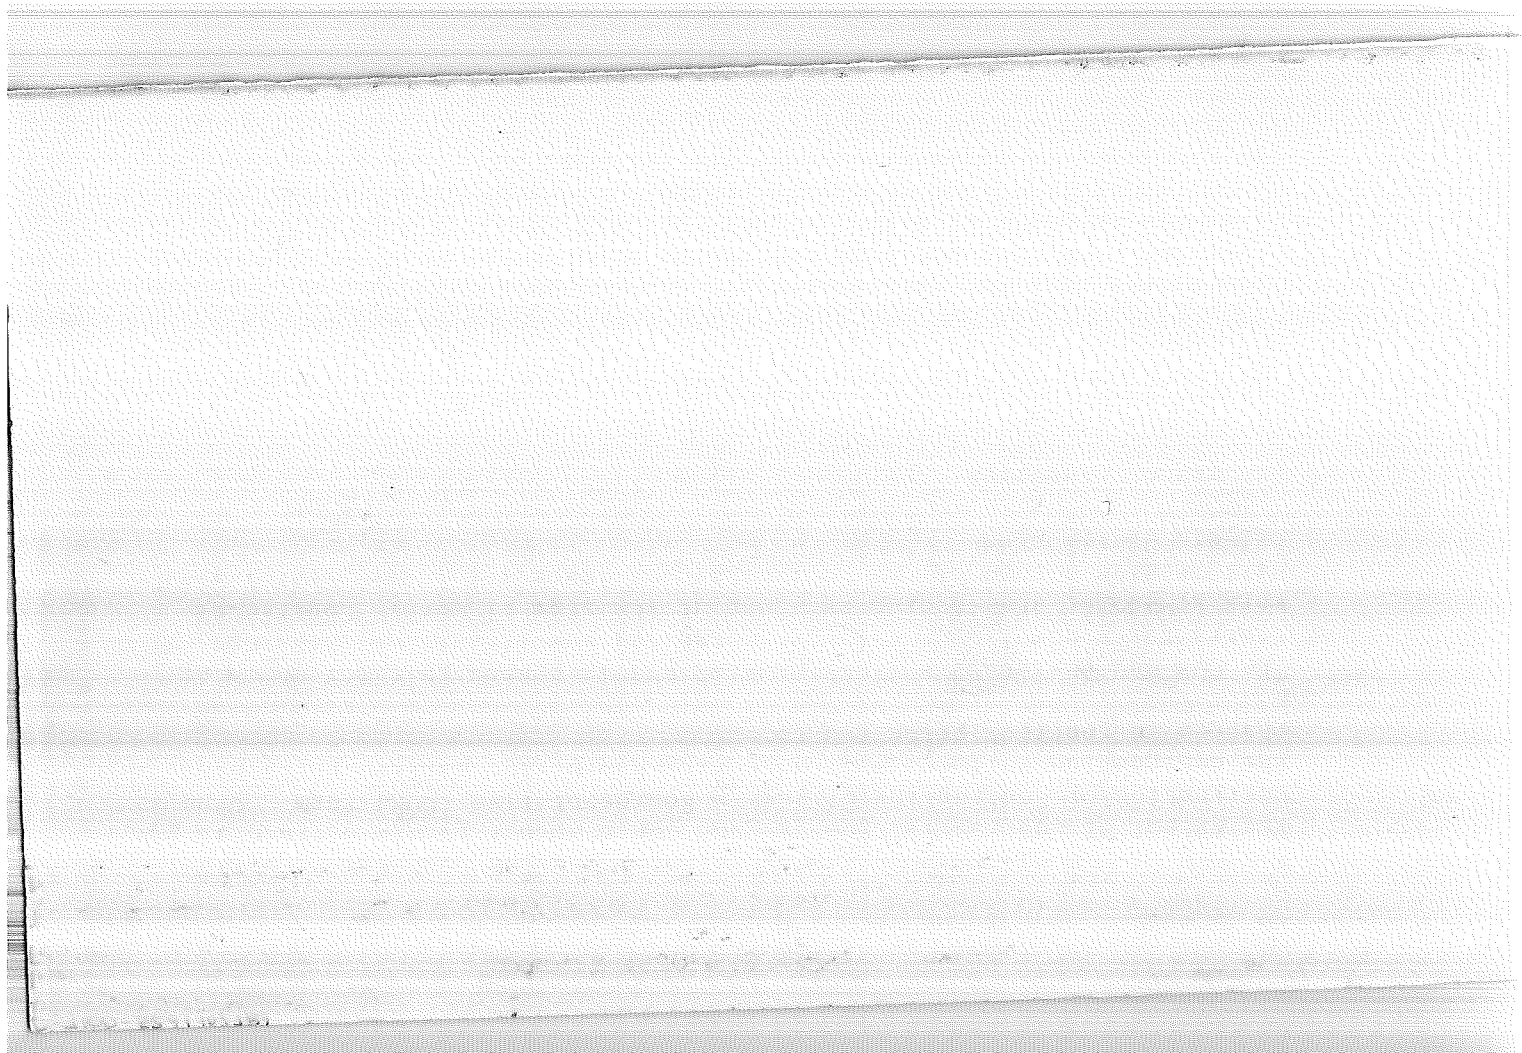

USDA-FOREST SERVICE

Index
File No. 1751

T. 26 S. R. 7 E.

Merid. WILLAMETTE

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

R.D. CRESCENT

N.F. DESCHUTES

Tract or
Survey No. _____

County KLAWATH

State OREGON

Cor.
No. A-17

COR. of SEC. _____

COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

SEE: T. 25 S. - R. 7 E.
Z-17

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

BC SET BY E.G. 1981

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

Corner Legend:

Searched for/Not Found

Evidence Found/Accept

Permanent Monument

Signature _____

Title _____

Division _____

Headquarters _____


Date _____

D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



9

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

PLAT PREPARED OR Certified Cor. Record Prepared? Yes No Filed At: **Co. SURVEYOR'S OFFICE** Date _____

11

REMARKS

Indx File No. _____ T. _____ S., R. _____ E., W.M. _____ Tract or Surv. No. _____ Cor. _____

12

13

USDA-FOREST SERVICE

Index
File No. 1851

T. 26 S. R. 7 E.

Merid. WILLAMETTE

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or
Survey No. _____

Cor.
No. A-18

R.D. CRESCENT

County KLAMATH

COR. of SEC. _____

N.F. DESCHUTES

State OREGON

COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

SEE: T. 25 S - R. 7 E. Z-18

BC SET BY EG, 1981

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

2

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

3

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

6

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature _____

Title _____

Division _____

Headquarters _____

Date _____

D-7100-52 (3/79)


1

5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

PLAT PREPARED OR Certified Cor. Record Prepared? Yes No Filed At: **Co. SURVEYOR'S OFFICE** Date _____

REMARKS

11

Index File No. _____ T. _____ S., R. _____ E., W. M. _____ Tract or Surv. No. _____ Cor. _____

12

13

USDA-FOREST SERVICE

Index

File No. 1951

T. 26 S. R. 7 E.

Merid. WILLAMETTE

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

E. R. D. CRESCENT

N. F. DESCHUTES

County KLAMATH

State OREGON


Tract or Survey No. _____

Cor. No. A-19

N/4 COR. of SEC. 2

COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

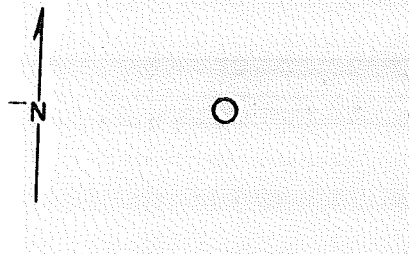

DESCRIBE CORNER MONUMENT FOUND

SEE: T. 25 S - R. 7 E, 2-19

BC SET BY EG. 1981

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

2

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

6

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

3

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature _____

Title _____

Division _____

Headquarters _____

Date _____

D-7100-52 (3/79)


1

5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAFFED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____
 PLAT PREPARED OR
 Certified Cor. Record Prepared ? Yes No Filed At: Co. SURVEYOR'S OFFICE Date _____

11

REMARKS

Index File No.

T.

S., R.

E., W.M.

Tract or Surv. No.

Cor.

12

13

USDA-FOREST SERVICE

Index
File No. 2051

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or
Survey No. _____


Cor.
No. A-20

T. 26 S. R. 7
Merid. WILLAMETTE

E. R.D. CRESCENT County KLAMATH
N.F. DESCHUTES State OREGON

E/16 COR. of SEC. 35
COR. of SEC. 2

CORNER DIAGRAM PER LEGEND

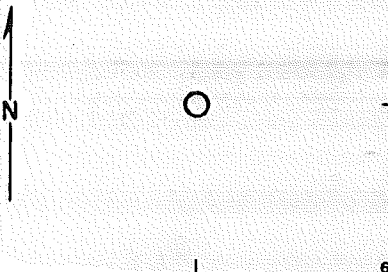

DESCRIBE CORNER MONUMENT FOUND

SEE: T. 25 S - R 7 E Z-20

BC SET 1981

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

- Searched for/Not Found
- Evidence Found/Accept.
- Permanent Monument


Signature _____ Title _____ Division _____ Headquarters _____ Date _____

D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

PLAT PREPARED OR

Certified Cor. Record Prepared? Yes No

Filed At:

Co. SURVEYOR'S OFFICE Date _____

11

REMARKS

12

Index File No. /

T.

S., R.

E., W.M.

Tract or Surv. No.

Cor.

13

USDA-FOREST SERVICE

Index

File No. 2151

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or Survey No. _____

Cor. No. A-21

T. 26 S. R. 7

E. R.D. CRESCENT

County KLAMATH

NW COR. of SEC. 2

Merid. WILLAMETTE

N.F. DESCHUTES

State OREGON

COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

SEE: T. 25 S - R. 7 E

Z-21

BC SET

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

Searched for/Not Found

Evidence Found/Accept

Permanent Monument

Signature _____

Title _____

Division _____

Headquarters _____

Date _____

D-7100-52 (3/79)


1

5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____
PLAT PREPARED OR
Certified Cor. Record Prepared? Yes No Filed At: **Co. SURVEYOR'S OFFICE** Date _____

11

REMARKS

Index File No.

T.

S., R.

E., W. M.

Tract or Surv. No.

Cor.

12

13

USDA-FOREST SERVICE

Index

File No. 2351

T. 26 S. R. 7 E.

Merid. WILLAMETTE

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

R.D. CRESCENT

N.F. DESCHUTES

County KLAMATH

State OREGON

Tract or Survey No. _____

Cor. No. A-23

N/4 COR. of SEC. 1

COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

SEE: T. 25 S - R. 7 E. Z-23

BC SET

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature _____

Title _____

Division _____


Headquarters _____

Date _____

D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT STAMPED



MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. _____
 or Agency _____

PLAT PREPARED OR **Co. SURVEYOR'S OFFICE** Date _____
 Certified Cor. Record Prepared? Yes No Filed At: _____

REMARKS

Index File No. _____ T. _____ S., R. _____ E., W. M. _____ Tract or Surv. No. _____ Cor. _____

USDA-FOREST SERVICE

Index
File No. 2451
T. 26 S. R. 7
Merid. WILLAMETTE

CORNER RECORD (SEARCH)


(Ref. FSM 7.151.4)

E. R.D. CRESCENT County KLAMATH
N.F. DESCHUTES State OREGON

Tract or
Survey No. _____

Cor.
No. A-24
COR. of SEC. 36
COR. of SEC. 7

CORNER DIAGRAM PER LEGEND

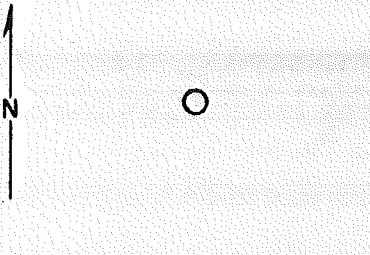

DESCRIBE CORNER MONUMENT FOUND

SEE: T. 25 S - R 7 E 2-24
BC SET

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:


- Searched for/Not Found
- Evidence Found/Accepted
- Permanent Monument

Signature _____ Title _____ Division _____ Headquarters _____ Date _____ D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

PLAT PREPARED OR Certified Cor. Record Prepared ? Yes No Filed At: Co. SURVEYOR'S OFFICE Date

11

REMARKS

Index File No. T. S., R. E., W.M. Tract or Surv. No. Cor.

12

13

USDA-FOREST SERVICE

Index

File No. 2551

CORNER RECORD (SEARCH) ^{Contract or}
(Ref. FSM 7151.4) ^{Survey No.}

Cor. No. A-25

T 26 S. R. 7 E. R.D.

Crescent County Klamath

NE Cor. of


Merid. WILLAMETTE N.F.

DESCHUTES State OREGON

Section 1

SEE: 2-01 T. 25 S., R. 8 E., W.M.

BCSP

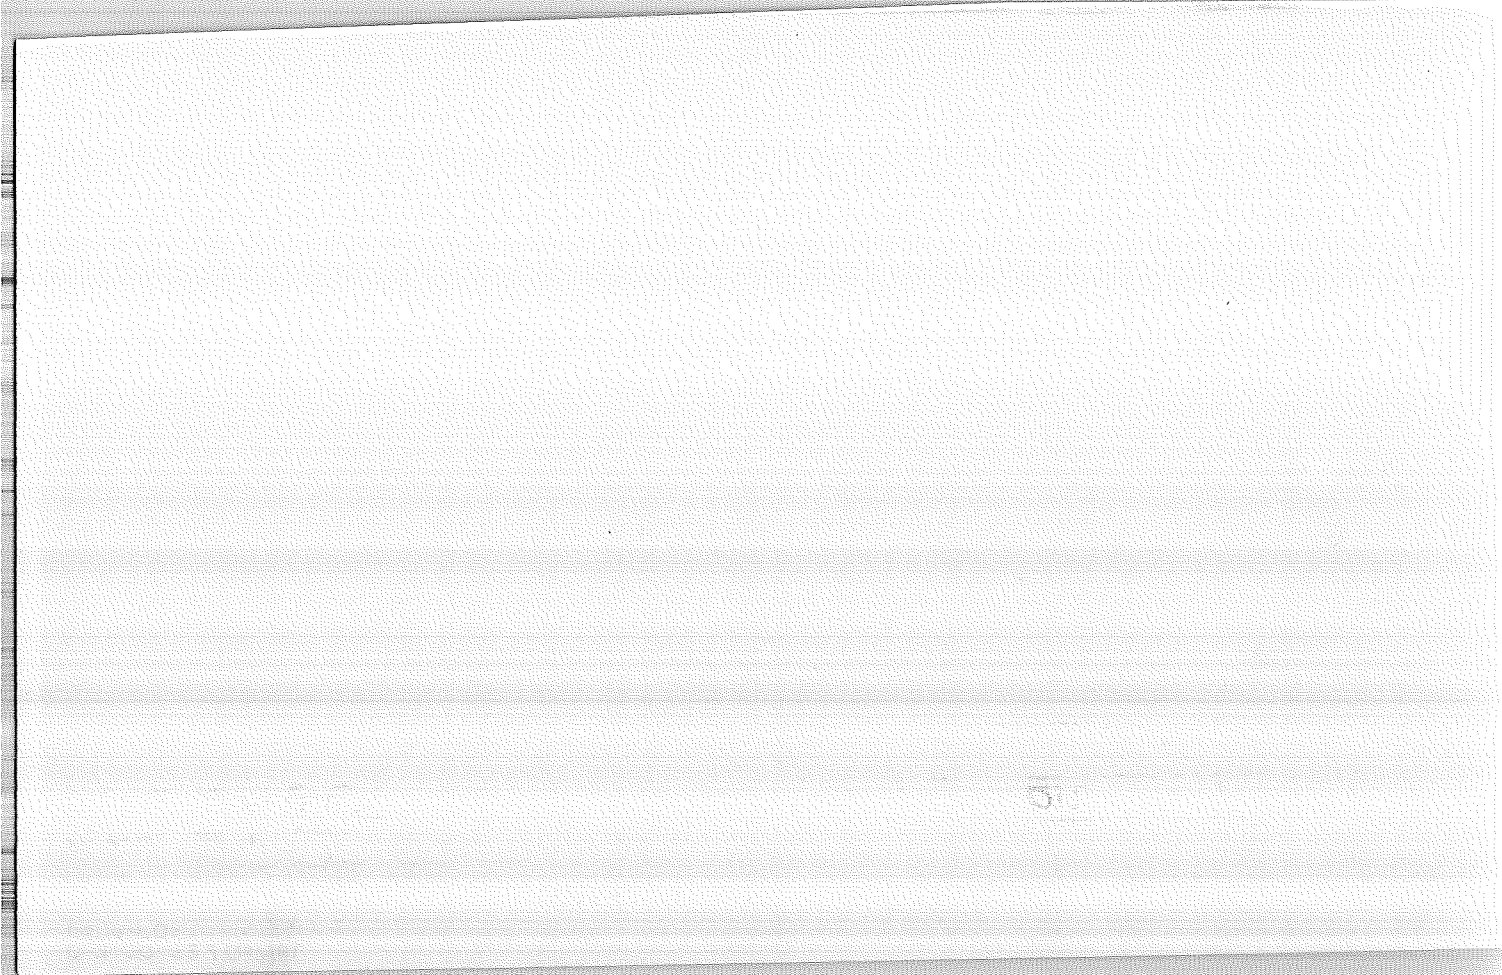

File No. **B-13**

T **26 S. R. 7**

Merid. **Willamette**

E. R.D. **CRESCENT**

N.F. **Deschutes**

CORNER RECORD (SEARCH) Contract or

(Ref. FSM 7151.4)

Survey No.

County **KLAMATH**

State **Oregon**

Cor. No. **1352**

N 1/16 Cor. of

Section **3**

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

FD 2 1/2" IP. WITH 2 1/2" BRASS CAP RSG. 0.4 FT.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

6" L. PINE S 36 1/2" W - 13.1 FT. (SCRIB. VIS.) (N 1/16 S 4) (BT)
7" L. PINE S 77° E - 8.0 FT. (SCRIB. VIS.) (N 1/16 S 3) (BT)

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At _____
Object Ident. _____
Ident. By _____
Signature _____

CORNER LEGEND:

- FS or Unverified
- Contr. Other
- Searched For/Not Found
- ⊗ Evidence Found/Accept.
- Permanent Mon. Set/Td.
- ◆ Permanent Mon. Set/Td.

Searched By: **FAST**

Title **PLS**

Division


Headquarters

Date **7/89**

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By FAST Title PLS Date 9/89 State Registration No. PLS 1938
or Agency

Established Cor. Record Prepared? Yes No Filed At KLAM. Co. Surveyor's Office Date

11

History
of
Surveys,
G.L.O.,
etc.

12

Index File No.

T.26 S., R.7 E., W.M.

Contract or Surv. No

Cor.

13

USDA-FOREST SERVICE

Index
File No. B-14


CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or
Survey No. _____ Cor.
No. 1452

T 26S R. 7E
Merid. WILLAMETTE

R.D. CRESCENT County KLAMATH NW 1/6 COR. OF
N.F. DESCHUTES State OREGON SECTION 3

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

FAST Signature PLS. Title _____ Division _____ Headquarters _____ Date 7-89 FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET 2 1/2" I.P. WITH 2 1/2" BRASS CAP RSG. 0.3 FT.
SET GALV. STEEL POST 4.0 FT NORTH W/LSM & PB
SET GALV. STEEL POST 4.0 FT. WEST W/LSH & PB.

T265 R7E
NW 1/4 + S3
PLS 1938
1989

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

6" L. PINE - S59W, 53.3' (NW 1/16 S3 BOT)
14" L. PINE - S27E, 5.6' (NW 1/16 S3 BOT)

Work Done By F. AST Title PLS Date 9/89 State Registration No. or Agency PLS 1938

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Index File No.

B-14

T. 265 R. 7E

WM.

Tract or Surv. No.

Cor.

Index

File No. C-1

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or

Survey No. _____

Cor.

No. C-01

T 26 S R. 768 E

R.D. D-2


County Klamath

Merid. Will

N.F. Desc

State OR

CORNER DIAGRAM

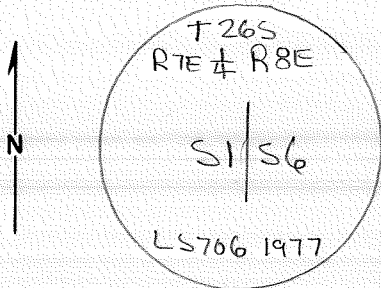

DESCRIBE CORNER MONUMENT FOUND

Rebar

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

1 BT down & rotted

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

Title

Division

Headquarters

Date

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

LP Pine 15" bears S 53° W 65 ⁴⁸ scribed $\frac{1}{4}$ S 1 B+

LP Pine 6" bears N 32° E 11 ⁸⁵ scribed $\frac{1}{4}$ S 6 B+

Work Done By B. Rogers Title Cad. Surveyor Date 7/77 State Registration No. or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Tie from Traverse Pt. D to $\frac{1}{4}$ corner
 dist Pt D to $\frac{1}{4}$ cor 50²³
 T at Pt. D site Pt. C DFI & R + 124° 03' 20" 304° 03' 18"
 217° 39' 21" 37° 39' 21"

Index File No. C-1 T. _____

R. _____ M. _____

Tract or Surv. No. _____

Cor. C-01 ¹³


Index File No. 1153

CORNER RECORD (SEARCH) Contract or Survey No. _____
(Ref. FSM 7151.4)

T 26 S. R. 7 E. R.D. Crescent County Klamath Section 9/4 Cor. No. C-11
Merid. Willamette N.F. Deschutes State Oregon Section 4 Cor. of _____

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

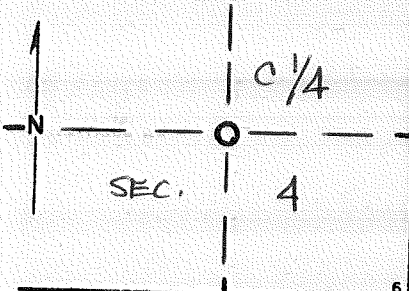

Wooden Post - 3" dia psg 3" in fair condition - no markings (cruisers post)

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SF/NF

One blazed live tree 15' south

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

CORNER LEGEND:

- FS or Unverified
- Contr. Other
- Searched For/Not Found
- Evidence Found/Accept.
- Permanent Mon. Set/Fd.


Searched By: Leen Mark For Title For Division Timbr Headquarters D-2 Date 9/22/82

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Painted Post Red and hung red ribbons on small trees around it.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

9

10

11

12

13

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Plat or Certified Cor. Record Prepared? Yes No Filed At _____ Co. Surveyor's Office Date _____

History of Surveys, G.L.O., etc.

Index File No. 1153 T. 26 S., R. 7 E., W.M.

Contract or Surv. No

Cor. C-11

File No. C-13

T 26 S. R. 7 E.

Merid. Willamette

CORNER RECORD (SEARCH) Contract or
(Ref. FSM 7151.4) Survey No.

R.D. CRESCENT

County KLAMATH

State Oregon

Cor. No. 1353

W 1/4 Cor. of Section 3

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

FD. 2 1/2" IP. WITH 2 1/2" BRASS CAP RSG. 0.4 FT.
FD. CARS. POST 3.0 FT NORTH W/LSM

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

6" L. PINE S 22° W - 11.5 FT. (1/4 S4) (BT.)
6" L. PINE S 68 1/2° E - 30.1 FT. (1/4 S3) (BT.)

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____

Signature

CORNER LEGEND:

- | | | | |
|--------------|------------|------------------------|--|
| FS or Contr. | Unverified | Other | |
| ○ | ◇ | Searched For/Not Found | |
| ⊗ | ⊗ | Evidence Found/Accept. | |
| ● | ◆ | Permanent Mon. Set/Fd. | |

Searched By: FAST

Title PLS

Division


Headquarters

Date 7/89

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By FAST Title PLS Date 9/89 State Registration No. PLS 1938
or Agency

Plat of Cor. Record Prepared Yes No Filed At KLAM. Co. Surveyor's Office Date

11

History
of
Surveys,
G.L.O.,
etc.

12

Index File No.

T26S., R. 7 E., W.M.

Contract or Surv. No

Cor.

13

USDA-FOREST SERVICE

Index File No. C-15

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or Survey No. _____

Cor. No. 1553

T 26S R. 7E

R.D. CRESCENT County KLAMATH

C 1/4 COR OF


Merid. WILLAMETTE

N.F. DESCHUTES State OREGON

SECTION 3

CORNER DIAGRAM

DESCRIBE CORNER MONUMENT FOUND



DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

FAST Signature

Title PLS

Division _____

Headquarters _____

Date 7-89

FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET 2 1/2" I.P. WITH 2 1/2" BRASS CAP RSG. 0.3 FT.
SET GALV. STEEL POST 3.0 FT NORTH W/LSM.

T26S R7E
C 1/4 + S3
PLS 1938
1989

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

11" L. PINE - N 17° E - 49.00 FT. (C 1/4 S3 B & T)
12" L. PINE - N 68° W - 52.50 FT. (C 1/4 S3 B & T)

Work Done By F. AST Title PLS Date 9/89 State Registration No. PLS-1938
or Agency

Certified Cor. Record Prepared? Yes No Filed At: KLAMATH CO. SURVEYORS OFFICE. Date

REMARKS

Index File No.

C-15

T. 26S R. 7E

WM.

Tract or Surv. No.

Cor.

Index File No. **C-17**

T 26 S. R. 7 E. R.D. CRESCENT (Ref. FSM 7151.4) Contract or Survey No. _____
Merid. Willamette N.F. Deschutes County KLAMATH State Oregon Cor. No. 1753
w/1/4 Cor. of Section 3

CORNER DIAGRAM per legend

DESCRIBE CORNER MONUMENT FOUND

FD. 2 1/2" I.P. WITH 2 1/2" BRASS CAP RSG. 0.3 FT.
FD. CARB. POST 3.0 FT NORTH W/LSM

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

9" LPINE S22°W - 20.9 FT. (1/4 S3) (BT.) ALIVE
6" L. PINE S22°E - 7.4 FT. (1/4 S2) (BT.) ALIVE

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER




PHOTO IDENTIFICATION DATA
Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

CORNER LEGEND:
FS or Contr. Unverified Other
○ ◇ Searched For/Not Found
⊗ ⊗ Evidence Found/Accept.
● ◆ Permanent Mon. Set/Fd.


Searched By: F. AST

Title PLS Division _____ Headquarters _____ Date 7/87

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPEE



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By FAST Title PLS Date 9/89 State Registration No. PLS 1938
or Agency

Plat of OR Cor. Record Prepared? Yes No Filed At KLAM, Co. Surveyor's Office Date

11

History
of
Surveys,
G.L.O.,
etc.

12

Index File No C-17 T.26 S., R.7 E., W.M.

Contract or Surv. No

Cor.

13

USDA-FOREST SERVICE

Index
File No. _____

T. 26S S. R. 7E E. R. D. _____

Merid. WILLAMETTE

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or
Survey No. _____

Cor.
No. C-21


Crescent County Klamath

N.F. DESCHUTES State OREGON

W1/4 COR. of SEC. 1

COR. of SEC.

CORNER DIAGRAM PER LEGEND

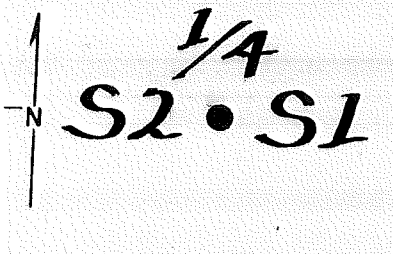

DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

Corner Legend:

Searched for/Not Found

Evidence Found/Accept

Permanent Monument

Signature

Edgar W. Graves

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take Chinquapin Drive in Two Rivers North Subdivision west from F.S. Rd.#255 to end of road. Walk 300' south to corner.

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82


D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 26" in ground.

MONUMENT SET AHEAD



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

4" L.P.Pine, S71½°W, 12.0', Scribed 1/4 S2 BT
 4" L.P.Pine, S31°E, 4.0', Scribed 1/4 S1 BT
 All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a and LSM
 130 decal 3' north of monument. Painted red band around bearing trees. Tagged
 trees w/L.S. 980 washer.

10

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency
PLAT PREPARED OR Certified Cor. Record Prepared? Yes No Filed At: Klamath **Co. SURVEYOR'S OFFICE** Date

11

REMARKS

Witnesses to the above corner: E.W. Graves
 J.O. Leagjeld

Index File No. T. S., R. E., W. M. Tract or Surv. No. Cor. 12 13

Index

File No. C-25

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

T 26S R. 768E

Tract or

Survey No. _____

Cor.

No. C-25

Merid. _____

R.D. D-2

County Klamath


Sec. Cor.

N.F. Desc

State OR

CORNER DIAGRAM

DESCRIBE CORNER MONUMENT FOUND



Rebar

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

1 BT down & Rotted

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

Title

Division

Headquarters

Date

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

15" LP Pine bears S 53° W 65²⁰ scribed 1/4 S1 BT
6" LP Pine bears N 32° E 11⁸⁵ scribed 1/4 S6 BT

10

Work Done By B. Rogers Title Cad. Surveyor Date 7/77 State Registration No. _____
or Agency _____

11

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

REMARKS

Tie from Trav. Pt. D to 1/4 cor
dist Pt. D to 1/4 cor 50²²
T at Pt. D sight Pt. C DFI Δ^{Rt.}

124° 03' 20"
217° 29' 21"

304° 03' 18"
37° 39' 21"

12

Index File No. 1

T.

R.

M.

Tract or Surv. No.

Cor.

C-25¹³

USDA-FOREST SERVICE

Index
File No. _____
T. 26S S. R. 7E

CORNER RECORD (SEARCH)
(Ref. FSM 7.151.4)

Tract or
Survey No. _____
Cor. No. D-13

Merid. WILLAMETTE E. R. D. Crescent County Klamath
N. F. DESCHUTES State OREGON S1/16

COR. of SEC. 3
COR. of SEC. 1

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255 on west end for 2 miles from F.S. Rd.#254, go 300' west of Basin Creek, turn south on spur road. Go 0.75 miles. Then walk 600' across Basin Creek to corner.

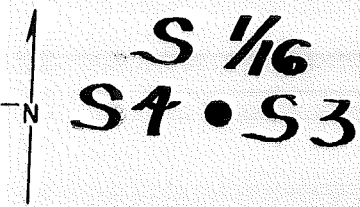


PHOTO IDENTIFICATION DATA
Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

Corner Legend:
 Searched for/Not Found
 Evidence Found/Accept
 Permanent Monument

Signature
Edgar W. Graves


Title Surveyor Division ORLS 980 Headquarters Bend Date 6/82 D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass cap on 2½"X30" Galvanized pipe 26" in ground.

MONUMENT SET/SEED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" L.P.Pine, S31°W, 5.1', Scribed S1/16 S4 BT
 7" L.P.Pine, S31°E, 5.1', Scribed S1/16 S3 BT
 All B.T.'s have sign 54-3 and 54-9 attached. Set polymer post with LSM 130 decal
 3' north of monument. Painted red band around bearing trees. Tagged trees w/L.S.
 980 washer.

10

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency
 Certified Plat Prepared or Copied? Yes No Filed At Klamath **Co. SURVEYOR'S OFFICE** Date

11

REMARKS

Witnesses to the above corner: E.W. Graves
 P.A. Manley

12


Index File No. T. S., R. E., W. M. Tract or Surv. No. Cor. 13

Index
File No. E-02

CORNER RECORD (SEARCH) Contract or
(Ref. FSM 7151.4) Survey No.

T 26 S. R. 7 E. R.D. CRESCENT County KLAMATH Cor. No. 0155
Merid. Willamette N.F. Deschutes State Oregon No. 0255
POL 2 Cor. of
Section 6

CORNER DIAGRAM per legend

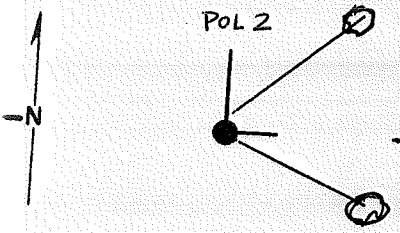

DESCRIBE CORNER MONUMENT FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

CORNER LEGEND:

- | | | | |
|--------|------------|---|---|
| FS or | Unverified | | |
| Contr. | Other | ○ | ◇ |
| | | ⊗ | ⊠ |
| | | ● | ◆ |
| | | | |
- Searched For/Not Found
Evidence Found/Accept.
Permanent Mon. Set/rd.

Searched By: FAST

Title PLS. Division _____ Headquarters _____ Date 7/09


CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET 5/8" X 30" I.R. WITH 1/2" ALUM CAP

SET GALV. STEEL POST 3.0 FT EAST W/LSM

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" L. PINE N 51° E - 27.2 FT. (X B-T)

8" L. PINE S 30° E - 26.2 FT (X B-T)

Work Done By: F. AST Title: PLS Date: 9/89 State Registration No. PLS-1938
or Agency

Plat. or Cor. Record Prepared Yes No Filed At: KLAM. Co. Surveyor's Office Date

History
of
Surveys,
G.L.O.,
etc.

Index File No. E-02

T 26 S., R. 7 E., W.M.

Contract or Surv. No

Cor.

Index
File No. E-03

CORNER RECORD (SEARCH) Contract or

T 26 S. R. 7 E.

E. R.D.

CRESCENT

County

Survey No.

Cor. No. 0355

Merid. Willamette

N.F. Deschutes


State Oregon

POL 1 Cor. of

Section 56

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

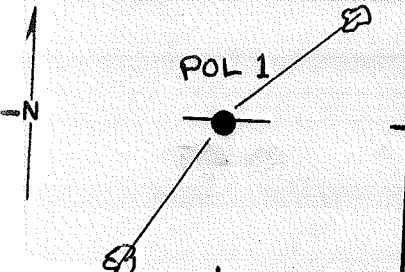

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

CORNER LEGEND:

- FS or Contr. Unverified
- FS or Contr. Other
- Searched For/Not Found
- Evidence Found/Accept.
- Permanent Mon. Set/Fd.

Searched By: FAST

Title
PLS

Division

Headquarters


Date 7/89

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET 5/8" X 30" IR. WITH 1 1/2" ALUM CAP. RSG 0.2 FT.
SET GALV. STEEL POST 3.0 FT EAST W/LSM.

MONUMENT STAMPED



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

9" L. PINE N 55° E - 35.0 FT (X B.T)
" S 23° W - 40.3 FT (X B.T)

Work Done By F. AST Title PLS Date 9/89 State Registration No. or Agency PLS-1938

Plat or Certified Cor. Record Prepared? Yes No Filed At KLAM. Co. Surveyor's Office Date

History of Surveys, G.L.O., etc.

Index File No. E-03 T. 26 S., R. 7 E., W.M. Contract or Surv. No. Cor.

Index
File No. E-05

CORNER RECORD (SEARCH) Contract or
(Ref. FSM 7151.4) Survey No. _____

T 26 S. R. 7 E.

R.D. CRESCENT

County KLAMATH

Cor. No. 0555

Merid. Willamette

N.F. Deschutes


State Oregon

Cor. of SE

Section 6

CORNER DIAGRAM, per legend

DESCRIBE CORNER MONUMENT FOUND

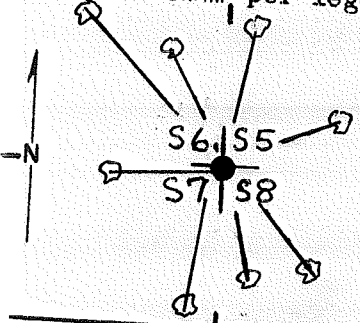

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

14" L. PINE - N 70° E - 16.9 FT.

(ORIG.)

8" L. PINE SNAG - N 31° W - 14.5 FT. (T-26S R7E S6BT) (ORIG.)

23" SNAG. - S 18° E - 24.3 FT. (T26S R7E S8) (ORIG.)

13" SNAG. - S 86° W - 17.7 FT.

ORIG.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____

Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

RD. # 830

300 FT

Sec Cor.

- CORNER LEGEND:
- | | | |
|--------------|------------------|------------------------|
| FS or Contr. | Unverified Other | |
| ○ | ◇ | Searched For/Not Found |
| ⊗ | ⊗ | Evidence Found/Accept. |
| ● | ◆ | Permanent Mon. Set/Fd. |

Searched By: F. AST

Title PLS 1938


Division _____

Headquarters _____

Date 7-89

CORNER RECORD (PERPETUATION)

MONUMENT STAMPED



MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET 2 1/2" X 30" I.P. WITH 2 1/2" BRASS CAP. RSG. 0.4 FT.

SET STEEL POST W/LSM 2 FT WEST

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" W. FIR - N 15° E - 32.5 FT. (T26S R7E 55 B-T)

3" W. FIR - S 37° E - 26.1 FT. (~~56 B-T~~)

4" L. PINE - S 6° W - 31.6 FT. (T26S R7E 57 B-T)

9" L. PINE - N 49° W - 42.5 FT. (T26S R7E 56 B-T)

Work Done By FAST Title PLS Date 9-89 State Registration No. PLS-1938
or Agency

Plat PE Cor. Record Prepared? Yes No Filed At KLAM. Co. Surveyor's Office Date

History of Surveys, G.L.O., etc. GLO BY C. COLLIER CONTRACT # 769 APPROX. 5/1907

Index File No.

E-05

T.26 S., R. 7 E., W.M.

Contract or Surv. No

Cor.

USDA-FOREST SERVICE

Index

File No. 0955

T. 26 S. R. 7

E. R.D. CRESCENT

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or Survey No. _____

Cor. No. E-9

Merid. WILLAMETTE

N.F. DESCHUTES


County KLAMATH

State OREGON

SE COR. of SEC. 5

NW COR. of SEC. 9

CORNER DIAGRAM PER LEGEND

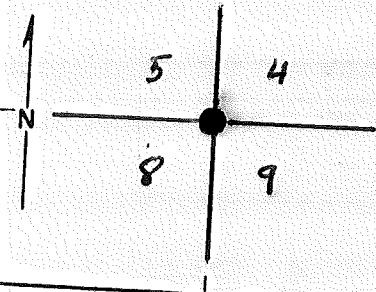

DESCRIBE CORNER MONUMENT FOUND

NO EVIDENCE OF ORIGINAL POST

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

FOUND ORIGINAL SW BT DOWN AND ROTTING L.P. PINE @/S 5/8 BT
BEG. S 45° W 92 FT.
THERE ARE OTHER TREES IN THE AREA WITH SCRIBING THAT APPEARS
TO HAVE BEEN SET IN ABOUT 1943. THIS WAS DETERMINED BY CORE
DRILLING. THE CENTER OF SCRIBED BLAZE AND CORE DRILLING
UNMARKED PART OF THE TREE AND COUNTING GROWTH RINGS.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

7

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

3

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature

H.C.H.

Title
PLS

Division
S.O.

Headquarters
BEND

Date
5/8/

D-7100-52 (3/79)


1

5

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT
 SET A 2 1/2" X 32" ALUM. CAPPED ALUM. PIPE 30" INTO GROUND.
 MARKED:

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A L.P. PINE, 7" ins. dia, brs.	N 44° W	2 1/4 FT	mkd.	UPPER BLAZE SCRIBED T. 26 S R 7 E 55 BT SET TOE BLAZE BT (1943?)
A L.P. PINE, 10" ins. dia, brs.	N 37° E	9 3/4 FT	mkd.	T. 26 S R 7 E 84 BT
A L.P. PINE, 11" ins. dia, brs.	S 46° E	10 1/2 FT	mkd.	UPPER BLAZE T. 26 S R 7 E 59 BT - TOE BLAZE BT (SET IN 1943?)
A L.P. PINE, 8" ins. dia, brs.	S 38° W	3 1/2 FT	mkd.	T. 26 S R 7 E 58 BT

Work Done By H.O.H. Title PLS Date 4/81 State Registration No. 1898
 or Agency
 PLAT PREPARED OR Co. SURVEYOR'S OFFICE Date
 Certified Cor. Record Prepared? Yes No Filed At

THERE IS ALSO AN L.P. PINE BRNG. N. 20 E TOE BLAZED BT

Index File No. 0955 T. S., R. E., W.M. Tract or Surv. No. Cor. E-9

USDA-FOREST SERVICE

Index
File No. _____
T. 26S S. R. 7E E. R.D. Crescent

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)


Tract or Survey No. _____
Cor. No. F-11

Merid. WILLAMETTE

N.F. DESCHUTES County Klamath State OREGON

S1/4 COR. of SEC. 4
COR. of SEC.

CORNER DIAGRAM PER LEGEND



DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255, 3.3 miles from Little Deschutes River Woods Subdivision to point 100' south of Hemlock Creek. Walk 300' west to corner.

Corner Legend:

- Searched for/Not Found
- Evidence Found/Accept.
- Permanent Monument

Signature
Edgar W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82


D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT STAFFED

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 26" in ground.



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

12" P.Pine, N28°E, 11.6', Scribed 1/4 S4 BT
7" L.P.Pine, S10°E, 27.6', Scribed 1/4 S9 BT
All B.T.'s have 54-3 and 54-4 sign attached. Set polymer post with LSM 130 decal
3' west of monument. Painted red band around bearing trees. Tagged trees w/L.S.
980 washer.

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
or Agency _____
PLAT PREPARED OR Filed At: Klamath **Co. SURVEYOR'S OFFICE** Date _____
Certified Cor. Record Prepared? Yes No

REMARKS

Witnesses to the above corner: E.W. Graves
P.A. Manley

Index File No. 1 T. S., R. E., W. M. Tract or Surv. No. _____ Cor. _____

USDA-FOREST SERVICE

Index

File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or
Survey No. _____


Cor.
No. E-12.

T. 26S S. R. 7E E. R.D. Crescent County Klamath E1/16 COR. of SEC. 4

Merid. WILLAMETTE N.F. DESCHUTES State OREGON COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

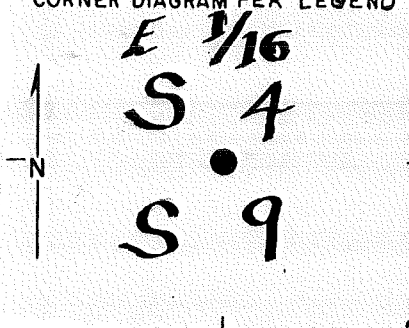

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

Corner Legend:

- Searched for/Not Found
- Evidence Found/Accept.
- Permanent Monument

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255, 3.3 miles from Little Deschutes River Woods Subdivision to point 100' south of Hemlock Creek. Walk 1600' west to corner.

Signature
Edgar W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82


D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 26" in ground.

MONUMENT SET/FILED



ACCESSORIES DESCRIBE NEW B.T.'s WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

6" L.P.Pine, N43°E, 18.3', Scribed E1/16 S4 BT
5" L.P.Pine, S25°E, 5.3', Scribed E1/16 S9 BT
All B.T.'s have sign 54-3 and 54-9 attached. Set polymer post with LSM 130 decal 3' east of monument. Painted red band around bearing trees. Tagged trees w/L.S. 980 washer.

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
or Agency
PLAT PREPARED OR
Certified Cor. Record Prepared? Yes No Filed At: Klamath **Co. SURVEYOR'S OFFICE** Date

REMARKS

Witnesses to the above corner: E.W. Graves
P.A. Manley

Index File No. T. S., R. E., W. M. Tract or Surv. No. Cor.

USDA-FOREST SERVICE

Index

File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or

Survey No. _____

Cor.

No. E-13

T. 26S S. R. 7E E. R.D. _____

Crescent

County

Klamath

SW

COR. of SEC. 3

Merid. WILLAMETTE

N.F. DESCHUTES

State


OREGON

COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

None

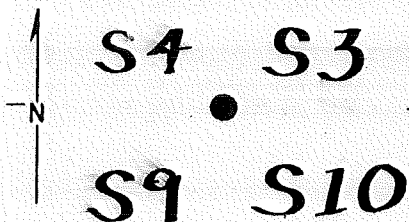

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Take F.S. Rd.#255 3.3 miles from Little Deschutes River Woods Subdivision to point 100' south of Hemlock Creek. Walk 2900' west to corner.

Signature

E.W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82


D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2 1/2" Brass Cap on 2 1/2" X 30" Galvanized pipe 24" in ground.

MONUMENT SET AHEAD



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" L.P.Pine, N38⁰W, 5.0', Scribed T26S R7E S4 BT
 7" L.P.Pine, N40⁰E, 11.2', Scribed T26S R7E S3 BT
 6" L.P.Pine, S57⁰E, 7.0', Scribed T26S R7E S10 BT
 8" L.P.Pine, S43⁰W, 9.6', Scribed T26S R7E S9 BT
 All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a decal and 54-4 sign 3' south of monument. Painted red band around bearing trees. Tagged trees w/L.S. 980 washer.

10

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency
PLAT PREPARED OR
 Certified Cor. Record Prepared? Yes No Filed At: Klamath **Co. SURVEYOR'S OFFICE** Date

11

REMARKS


Witnesses to the above corner: E.W. Graves
 P.A. Manley

12

Index File No. T. S., R. E., W. M. Tract or Surv. No. Cor. 13

Index File No. E-15

T 26 S. R. 7 E. R.D. CRESCENT (Ref. FSM 7151.4) Contract or Survey No. _____
Merid. Willamette N.F. Deschutes County KLAMATH State Oregon Cor. No. 1555
CORNER DIAGRAM, per legend 1 DESCRIBE CORNER MONUMENT FOUND Section 3



FD. 2 1/2" I.P. WITH 2 1/2" BRASS CAP RSG. 0.4 FT. CARS. Post 3.0 FT SOUTH W/PB & LSM

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND 2

9" L. PINE N 3 1/2° W - 13.2 FT. (1/4 S3) (BT.) ALIVE
8" L. PINE S 48° W - 23.7 FT (1/4 S10) (BT.) DEAD & STANDING

PHOTO IDENTIFICATION DATA 6
Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER 3


CORNER LEGEND:
FS or Unverified
Contr. Other
○ Searched For/Not Found
⊗ Evidence Found/Accept.
● Permanent Mon. Set/Pd.

Searched By: FAST Title PLS Division _____ Headquarters _____ Date 7/89

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By F. AST Title PLS Date 9/89 State Registration No. PLS-1938
 or Agency
 Prepared For Record Prepared Yes No Filed At KLAM. Co. Surveyor's Office Date

History of Surveys, G.L.O., etc.

Index File No.

T.26 S., R.7 E., W.M.

Contract or Surv. No

Cor.

9
10
11
12
13

USDA-FOREST SERVICE

Index
File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or
Survey No. _____

Cor.
No. E-17

T. 26S S. R. 7E E. R.D. Crescent

County Klamath

SW COR. of SEC. 2


Merid. WILLAMETTE

N.F. DESCHUTES State OREGON

COR. of SEC.

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

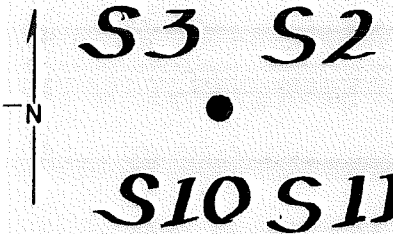

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255 to last road in Little Deschutes River Woods Subdivision, turn west, go 1.3 miles on spur road. Walk 300' to corner.

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature
Edgar W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82


Date
D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2 1/2" Brass Cap on 2 1/2"X30" Galvanized pipe 26" in ground.

MONUMENT SET/FEED



9

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" L.P.Pine, N49⁰W, 34.4', Scribed T26S R7E S3 BT
 4" L.P.Pine, N58⁰E, 17.3', Scribed T26S R7E S2 BT
 5" L.P.Pine, S76 1/2⁰E, 19.8', Scribed T26S R7E S11 BT
 6" L.P.Pine, S19⁰W, 10.5', Scribed T26S R7E S10 BT
 All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a decal
 3' east of monument. Painted red band around bearing trees. Tagged trees w/L.S.
 980 washer.

10

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency
PLAT PREPARED OR
 Certified Cor. Record Prepared? Yes No Filed At: Klamath **Co. SURVEYOR'S OFFICE** Date _____

11

REMARKS

Witnesses to the above corner: E.W. Graves
J.O. Leagjeld

12

Index File No. T. S., R. R. E., W. M. Tract or Surv. No. Cor.

13

USDA-FOREST SERVICE

Index File No. _____

T 26S R. 7E

Merid. Willamette

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

R.D. Crescent County _____


N.F. Deschutes State _____

Tract or Survey No. _____ Cor. No. E-19

Klamath S1/4 cor. of Sec. 2

Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd#255 to last road in Little Deschutes River Woods Subdivision. Then turn west, go 3600' on spur road, walk 850' south to corner.

Signature

Edgar W. Graves

Title

Surveyor

Division

ORLS 980

Headquarters

Bend

Date

6/82

7100-52-(3/68)

T
CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Monument stamped:

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 26" in ground

T26S R7E
 1/4 S2
 S11
 1982
 ORLS 980

9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" L.P.Pine, N13°E, 5.2', Scribed 1/4 S2 BT

6" L.P.Pine, S39°E, 13.0', Scribed 1/4 S11 BT

All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a decal 3' west of monument. Painted red band around bearing trees. Tagged trees w/L.S. 980 washer.

10

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
or Agency

Certified Cor. Record Prepared ? Yes No Filed At: Klamath Co. Surveyors office Date

11

REMARKS

Witnesses to the above corner: E.W. Graves
P.A. Manley

12

Index File No. T. R. M. Tract or Surv. No. Cor. U.S. G.P.O. 1977-725-576/588

USDA-FOREST SERVICE

Index
File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or
Survey No. _____ Cor. No. E-21

T 26S R. 7E

R.D. Crescent County Klamath SW Cor of Sec. 1

Merid. _____

N.F. _____ State _____

CORNER DIAGRAM

DESCRIBE CORNER MONUMENT FOUND



Found 2½" Brass Cap set by Dortch from original evidence with no markings. I stamped cap with appropriate markings.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

7

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255, 1.8 miles south from F.S. RD.#254 then walk 1100 feet west to corner.

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

8

Signature
Edgar W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82

7100-52 (3/68)

4

5


T

CORNER RECORD (PERPETUATION)

Monument stamped

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

I stamped cap found with appropriate markings.



ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

- 6" L.P.Pine, N18¹/₂°W, 72.0', Scribed T26S R7E S2 BT
- 9" L.P.Pine, N7¹/₂°E, 32.5', Scribed T26S R7E S1 BT
- 10" L.P.Pine, S19¹/₂°E, 22.0', Scribed T26S R7E S12 BT
- 10" L.P.Pine, S65°W, 74.7', Scribed T26S R7E S11 BT

All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a decal. Painted red band around bearing trees. Tagged trees w/L.S. 980 washer.

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
or Agency

Certified Cor. Record Prepared ? Yes No Filed At: Klamath Co. Surveyors Office Date

REMARKS

Witnesses to the above corner: E.W. Graves
R.H. Taylor

Index File No. T. R. M. Tract or Surv. No. Cor. 13

USDA-FOREST SERVICE

Index
File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or Survey No. _____
Cor. No. E-23

T 26S R. 7E

R.D. Crescent County _____


S1/4 Cor. of Sec. 1

Merid. Willamette

N.F. Deschutes State _____

Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

None

2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

6

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

7

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255 to Chinquapin Drive in Two Rivers North Subdivision. Then go east to Muttonchop Street, then turn south to end of road. Walk 400 feet to corner.

3

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

8

4

Signature
Edgar W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82

7100-52-(3/68)


5

T
CORNER RECORD (PERPETUATION)

Monument stamped

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2 1/2" Brass Cap on 2 1/2" X30' Galvanized pipe 27" in ground.



9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" L.P.Pine, N32⁰W, 31.5', Scribed 1/4 S1 BT
 8" L.P.Pine, S49⁰W, 48.4', Scribed 1/4 S12 BT
 All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a and LSM 130 decal 3', east of monument. Paintd red band around bearing trees.
 Tagged trees w/L.S. 980 washer.

10

Work Done By. E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency

Certified Cor. Record Prepared ? Yes No Filed At: Klamath Co. Surveyors office Date

11

REMARKS

Witnesses to the above corner, E.W. Graves
 J.O. Leagjeld

12

Index File No. T. R. M. Tract or Surv. No. Cor. 13
 U.S. G.P.O. 1977-725-576/586

Index
File No. E-25 R7E

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____
Cor. No. E-25


T 26 S R. 7/8 E

R.D. Crescent County Klamath

Merid. Will

N.F. Deschutes State ORE

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

5/8" IRON PIN SEC 6

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

1. 8"-BRS N 20° W - dist 41 IKS - down rotten, chop marks - dist 32 ^{BTS.}
2. 8"-BRS N 22° E - dist 54 IKS - rotten trunk - chop marks - 36 ^{BTS.}
3. 8"-BRS S. 17° E - dist 35 IKS - standing scribing visible
4. 8"-BRS S 32° W - dist 71 IKS - pile of disturbed debris.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature

Title

Division

Headquarters

Date

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

set - pipe & cap, size 2" x 30", height above ground 4', excellent condition, (markings see corner diagram)

9

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

BTs

- 1. L.P. PINE 12" dia, BRS N41°W, dist 16 ⁶⁵
- 2. L.P. PINE 6" dia, BRS N20°E dist 27 ⁴⁸
- Existing - 3. L.P. PINE 20" dia, BRS S 27°E dist 23 ²⁴
- BT 4. L.P. PINE 13" dia, BRS S82°W, dist 29 ⁸⁰

10

Work Done By B. Rogers Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

11

REMARKS

5/88 - Revisited by K. Green - Fd. BC and 4 BTs (Two dead)

12

Index File No. T. R. M. Tract or Surv. No. Cor. E-25

USDA-FOREST SERVICE

Index
File No. _____

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or
Survey No. _____ Cor.
No. G-13

T 26S R. 7E R.D. Crescent County Klamath W1/4 Cor of Sec. 10

Merid. Willamette N.F. Deschutes State Oregon

CORNER DIAGRAM

DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255 3 miles from cattle guard at south side of Little Deschutes River Woods Subdivision. Then walk 400' north to corner.

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

Title

Division

Headquarters

Date

7100-52-(3/68)

Edgar W. Graves


Surveyor

ORLS 980

Bend

6/82

5

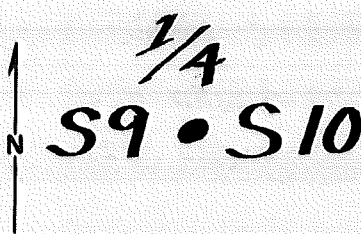

+
CORNER RECORD (PERPETUATION)

Monument stamped

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 26" in ground

T26S R7E
1/4
S9 S10
1982
ORLS 980

9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

5" L.P.Pine, N23°W, 10.5', Scribed 1/4 S9 BT
5" L.P.Pine, S78°E, 5.9', Scribed 1/4 S10 BT
All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a and LSM 130 decals 3' North and East of monument. Painted red band around bearing trees. Tagged trees w/L.S. 980 washer.

10

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
or Agency
Certified Cor. Record Prepared ? Yes No Filed At Klamath Co. Surveyors office Date _____

11

REMARKS

Witnesses to the above corner: E.W. Graves
P.A. Manley

12

Index File No. T. R. M. Tract or Surv. No. Cor. U.S. G.P.O. 1977-725-576/586

13

USDA-FOREST SERVICE

Index
File No. _____


T 26S R. 7E
Merid. Willamette

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or
Survey No. _____ Cor. No. G-15

R.D. Crescent County Klamath C1/4 cor. of Sec. 10
N.F. Deschutes State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

None

2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

6

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd. #255 to last road in Little Deschutes River Woods Subdivision. Then turn west, go 1100' to gate, then take spur road 1.7 miles, then walk 2000' south to corner.

3

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

7

8

Signature
Edgar W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82

7100-52-(3/68)

4

5


T

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 26" in ground.

Monument stamped



ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

9" L.P.Pine, S25°W, 28.7', Scribed C1/4 S10 BT
 8" L.P.Pine, N57°W, 3.1', Scribed C1/4 S10 BT
 All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with 54-2a and
 LSM 130 decals 3' North and West of monument. Painted red band around bearing
 trees. Tagged trees w/L.S. 980 washer.

9

10

11

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency _____
 Certified Cor. Record Prepared ? Yes No _____ Filed At: Klamath Co. Surveyors office Date _____

REMARKS

Witnesses to the above corner: E.W. Graves
 P.A. Manley

12

13

USDA-FOREST SERVICE

Index File No. _____

T 26S R. 7E


Merid. Willamette

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____ Cor. No. G-17

R.D. Crescent County Klamath E1/4 Cor. of Sec. 10
N.F. Deschutes State Oregon

CORNER DIAGRAM

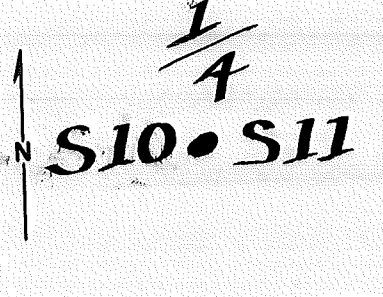

DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____
Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____
Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd.#255, 1.5 miles Southwest from cattle guard at south line of Little Deschutes River Woods Subdivision and then walk 1/2 mile north to corner.

Signature
Edgar W. Graves

Title
Surveyor

Division
ORLS 980

Headquarters
Bend

Date
6/82


7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 27" in ground.

Monument stamped



9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

7" L.P.Pine, S42°W, 17.9', Scribed 1/4 S10 BT
 8" L.P.Pine, S64°E, 8.7', Scribed 1/4 S11 BT
 All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with LSM 130 decal
 8' north of monument. Painted red band around bearing trees. Tagged trees w/L.S.
 980 washer.

10

Work Done By E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency

Certified Cor. Record Prepared? Yes No Filed At: Klamath Co. Surveyors office Date

11

REMARKS

Witnesses to the above corner: E.W. Graves
 P.A. Manley

Index File No. T. R. M. Tract or Surv. No. Cor.

USDA-FOREST SERVICE

Index

File No. 2157

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or

Survey No.

Cor.

No. G-21

T. 26 S. R. 7

E. R.D. CRESCENT County KLAMATH

COR. of SEC.

Merid. WILLAMETTE


N.F. DESCHUTES State OREGON

COR. of SEC.

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

SEARCHED FOR, NOTHING FOUND

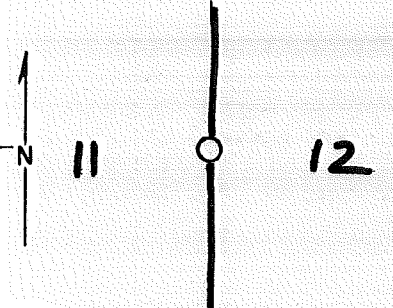

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

○ Searched for/Not Found

⊗ Evidence Found/Accept.

● Permanent Monument

Signature

P. DESANTIS

Title

Surv. Tech

Division

Headquarters

Bend

Date


1980

D-7100-52 (3/79)

5

CORNER RECORD (PERPETUATION)

MONUMENT STAMPED



MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

PLAT PREPARED OR Certified Cor. Record Prepared? Yes No Filed At: **Co. SURVEYOR'S OFFICE** Date _____

REMARKS

Index File No. **2157** T. S., R. E., W.M. Tract or Surv. No. Cor. **G-21**

D-7100-52d (10/78)
USDA-FOREST SERVICE

Index
File No. _____ CORNER RECORD (SEARCH) Tract or Survey No. _____ Cor. No. G-25
(Ref. FSM 7151.4)
T 26 S. R. 7 E. R.D. CRESCENT County KLANATH 1/4 COR.
Merid. WILLAMETTE N.F. DESCHUTES State OREGON

SEE: G-01
T265 R8E

BC by
Jm type
4/78

6-25

USDA-FOREST SERVICE

CLOSING CORNER

Index File No. 1359

CORNER RECORD (SEARCH)
(Ref. FSM 7.151.4)

Tract or Survey No. _____

Cor. No. J-13

T. 26 S. R. 7

E. R.D. CRESCENT County KLAMATH

Cor. of SEC. _____

Merid. WILLAMETTE


N.F. DESCHUTES State OREGON

Cor. of SEC. _____

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

FOUND NO TRACE OF ORIGINAL POST

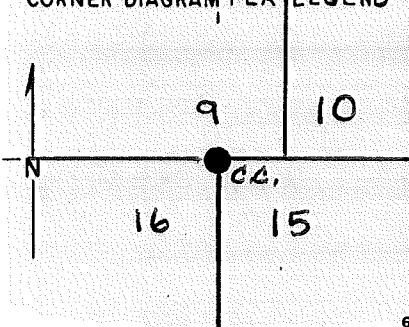

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

A 19" P. PINE BEARS $553^{\circ}W$ 46 FT MARKED SL SRTE

A 22" P. PINE BEARS $521^{\circ}E$ 40 FT. BLAZE HEALED OVER. DID NOT OPEN.

NO BTs SET TO NORTH.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature H.C.H.

Title PLS

Division 5,0

Headquarters BEND

Date 5/81


D-7100-52(3/79)

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET A 2 1/2" X 32" ALUMINUM CAPPED ALUM. PIPE MARKED:

MONUMENT SET/REPAIRED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

	ins. dia, brs.		mkd.	
A	12" P. PINE	N 50° W	18 9/16 FT	CC T265 R7E S9 BT
A	P. PINE, 19"	S 53° W	46 3/4 FT	ORIGINAL BT
A	P. PINE, 22"	S 21° E	40 3/4 FT	ORIGINAL BT

Work Done By H.C.H. Title _____ Date _____ State Registration No. _____
 or Agency _____
 Certified Cor. Record Prepared? Yes No Filed At: CO. SURVEYOR'S OFFICE Date _____

REMARKS
 FROM THE CLOSING CORNER TO THE STANDARD COR. ~ S 89° 15' E 104 53

Index File No. 1359 T. S., R. E., W.M. Tract or Surv. No. Cor. J-13

USDA-FOREST SERVICE

Index File No. 1359


CORNER RECORD (SEARCH)
(Ref. FSM 7.151.4)

Tract or Survey No. _____
Cor. No. J-13

T. 26 S. R. 7 E. R.D. _____ County _____ SE COR. of SEC. 9

Merid. WILLAMETTE N.F. DESCHUTES State OREGON SW COR. of SEC. 10

CORNER DIAGRAM PER LEGEND

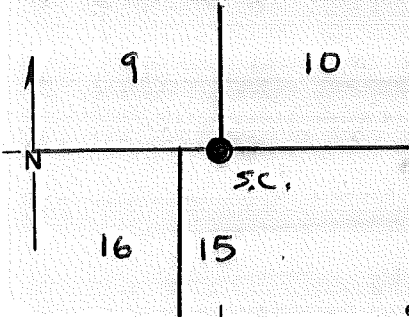

DESCRIBE CORNER MONUMENT FOUND
FOUND NO TRACE OF ORIGINAL POST.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND
NE BT IS AN 11" SNAG APPROX 8' TALL, BT VISIBLE BR. N10°E @ 45 FT
NW BT IS A LIVE 20" P. PINE 65 R7E S9 VISIBLE BEARING N64°W
AT 70³
SE BT IS A LIVE 20" P. PINE S15 MARKED THROUGH BR. S14°E 42⁵ FT

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

- Searched for/Not Found
- Evidence Found/Accept.
- Permanent Monument


Signature <u>H.C.H</u>	Title <u>RPLS</u>	Division <u>S. O.</u>	Headquarters <u>BEND</u>	Date <u>5/8/</u>	<u>D-7100-52 (3/79)</u>
---------------------------	----------------------	--------------------------	-----------------------------	---------------------	-------------------------

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

I SET A 2 1/2" X 3" ALUM. PIPE AND CAP 30" IN THE GROUND MARKED!

MONUMENT SET/REPLACED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A 8"	L.P. PINE ins. dia, brs.	N 39° E	155 FT	mkd.	T 26 S RTE S10 BT
A 5"	W. FIR ins. dia, brs.	S 27° E	87 FT	mkd.	T 26 S RTE S15 BT
A 20"	P. PINE ins. dia, brs.	N 64° W	70 3/4 FT	mkd.	ORIGINAL BT
A _____	_____ ins. dia, brs.	_____	_____	mkd.	_____

Work Done By H.C.H. Title PLS. Date 4/81 State Registration No. 1898
 or Agency _____

PLAT PREPARED OR Certified Cor. Record Prepared? No Filed At: KLAMATH Co. SURVEYOR'S OFFICE Date _____

THIS CORNER WAS SURVEYED IN 1868 AND ~~REMOVED~~ SET. IN 1907 A RETRACEMENT SURVEY WAS DONE. THE RETRACEMENT SURVEY FOUND THE NW BT DEAD SO IT WAS REPLACED. THERE WAS ALSO A DISCREPANCY IN THE CORNER LOCATION, SO A CLOSING CORNER WAS SET AND THE BTs IN SECS. 15 & 16 WERE DESTROYED. THE ONE SEC. 16 SHOULD ~~BE~~ BE DESTROYED, BUT THE ONE IN SEC. 15 ~~SHOULD~~ SHOULD HAVE BEEN LEFT, SO I REPLACED IT WHEN I SET THE MONUMENT.

Index File No. 1359 T. _____ S. _____ E., W.M. _____ Tract or Surv. No. _____ Cor. _____

J-13

USDA FOREST SERVICE

Index
File No. _____

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. _____
Cor. No. J-15
Cor of Sec. 10

T 26S R. 7E
Merid Willamette

R.D. Crescent County Klamath
N.F. Deschutes State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

None

2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

None

3

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

7

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Take F.S. Rd#255, 2.2 miles from cattle guard at south side of Little Deschutes River Woods Subdivision, then walk 400' east to corner.

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Established By _____
Agency

8

4

Signature
Edgar W. Graves

Title
Surveyor

Division
OBLS 980

Headquarters
Bend

Date
6/82

7100-52-(3/68)


5

†
CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2½" Brass Cap on 2½"X30" Galvanized pipe 30" long 26" in ground.

Monument stamped



9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" L.P.Pine, N41°W, 24.8', Scribed 1/4 S10 BT
 7" L.P.Pine, S21°W, 16.5', Scribed 1/4 S15 BT
 All B.T.'s have sign 54-3 and 54-4 attached. Set polymer post with LSM 130 decal
 3' east of monument. Painted red band around bearing trees. Tagged trees w/L.S.
 980 washer.

10

Work Done By: E.W. Graves Title Surveyor Date 6/82 State Registration No. ORLS 980
 or Agency

Certified Cor. Record Prepared? Yes No Filed At: Klamath Co. Surveyors office Date

11

REMARKS

Witnesses to the above corner: E.W. Graves
 P.A. Manley

12

Index File No. T. R. M. Tract or Surv. No.

Cor. 13
 U.S. G.P.O. 1977-725-576/586

USDA-FOREST SERVICE

Index File No. 1759

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or Survey No. _____

Cor. No. J-17

T. 26 S. R. 7

E. R.D. CRESCENT

County KLAMATH

SE COR. of SEC. 10

Merid. WILLAMETTE

N.F. DESCHUTES


State OREGON

NW COR. of SEC. 14

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

NO EVIDENCE OF ORIGINAL MONUMENT

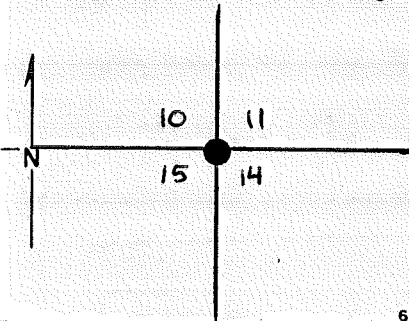

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

NW BT IS A STUMP IN PROPER LOCATION. N83°W 292 FT
A 10" L.P. PINE, DOWN AND DECAYING, BEARS S69°E 214 FT BLAZED AND SCRIBED T26S7E514 BT.
AN 11" L.P. PINE, DOWN AND DECAYING, BEARS N51°E 23° FT. BLAZED AND SCRIBED
AN 11" L.P. PINE STUMP BEARS S48°W 272 FT BLAZED AND SCRIBED T26S7E515 BT.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

7

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature

H.C.H.

Title

RALS

Division

—

Headquarters

S.O.

Date

5/81

D-7100-52 (3/79)

1


3

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

I SET A 2 1/2" X 32" ALUM. CAPPED ALUM. PIPE 30" IN THE GROUND, MARKED:

MONUMENT SET/DATE



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A 6"	L.P.PINE	ins. dia.	brs.	N 54° E	214 FT	mkd.	T265 R7E S11 BT
AN 8"	L.P.PINE	ins. dia.	brs.	N 41° W	24 1/2 FT	mkd.	T265 R7E S10 BT
A 7"	L.P.PINE	ins. dia.	brs.	S 17° W	24 1/2 FT	mkd.	T265 R7E S15 BT
A 7"	L.P.PINE	ins. dia.	brs.	S 69° E	53 1/2 FT	mkd.	T265 R7E S14 BT

Work Done By H.C.H. Title R.P.L.S. Date 5/81 State Registration No. 1898
 Certified Cor. Record Prepared? Yes No Filed At: Co. SURVEYOR'S OFFICE Date _____

REMARKS

THE ORIGINAL BT'S SET IN 1868 WERE GONE WHEN A RETRACEMENT WAS RUN AND 4 NEW BT'S WERE SET IN 1907.

Index File No. 1759 T. S., R. E., W.M. Tract or Surv. No. _____ Cor. J-17

USDA-FOREST SERVICE

Index

File No. 1959

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or

Survey No.

Cor.

No. J-19

T. 26 S. R. 7

E. R.D. Crescent

County

Klamath

S/4 COR. of SEC. 11

Merid. WILLAMETTE


N.F. DESCHUTES

State

OREGON

N/4 COR. of SEC. 14.

CORNER DIAGRAM PER LEGEND

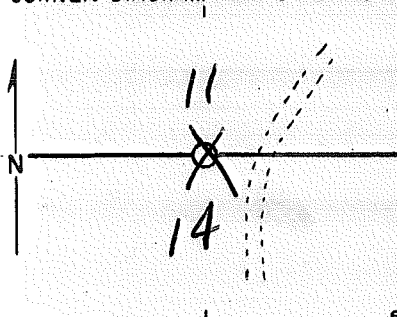

DESCRIBE CORNER MONUMENT FOUND

Searched for, nothing found.

2

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Found down rotted tree ($\pm 15''$) with scribing. Appears not to have been disturbed.

Other BT found, but has been moved from original location by logging activity.

3

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

6

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

SFNF 9/88

1

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature *Prave J. Desautels*

Title *SURV TECH*

Division

Headquarters

S.O.

Date

10/80


D-7100-52 (3/79)

5

CORNER RECORD (PERPETUATION)

MONUMENT - DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT STAMPED



ACCESSORIES DESCRIBE NEW B^m's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

9

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

PLAT PREPARED OR Certified Cor Record Prepared? Yes No Filed At:

Co. SURVEYOR'S OFFICE Date

11

Revisited 9/88 By Paula Sutton (Archy) ^{REMARKS} found location poster only

12

Index File No. T. S., R. E., W.M. Tract or Surv. No. Cor. 13

USDA-FOREST SERVICE

Index
File No. J-21

CORNER RECORD (SEARCH)


(Ref. FSM 7151.4)

Tract or
Survey No. _____ Cor. No. J-21

T 26 S. R. 7 E. R.D. Crescent County Klamath Sec. Cor.

Merid. WILLAMETTE N.F. DESCHUTES State OREGON

CORNER DIAGRAM

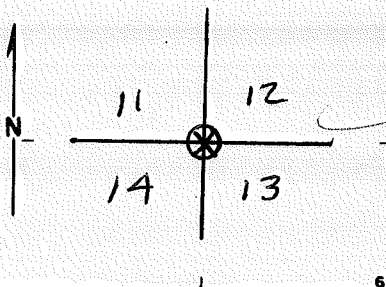

DESCRIBE CORNER MONUMENT FOUND

No Corner post found.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Found 1 witness tree P. Pine 24" in diameter,
Scribings visible

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature


PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature _____ Title _____ Division _____ Headquarters D-2 Date 1973 D-7100-52 (10/78)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared? Yes No Filed At: _____ Date _____

11

REMARKS

12

Index File No. T. S., R. E., W.M. Tract or Surv. No. Cor. J-21

13

USDA-FOREST SERVICE

Index File No. 2359

CORNER RECORD (SEARCH)
(Ref. FSM 7.151.4)

Tract or Survey No. _____

Cor. No. J-23

T. 26 S. R. 7

E. R.D. CRESCENT County KLAMATH

COR. of SEC. _____


Merid. WILLAMETTE

N.F. DESCHUTES

State OREGON

COR. of SEC. _____

CORNER DIAGRAM PER LEGEND

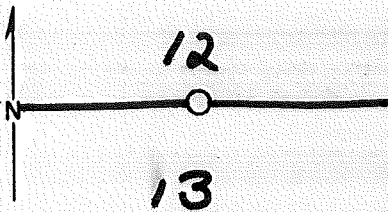

DESCRIBE CORNER MONUMENT FOUND

SEARCHED FOR, NOTHING FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature **P. DESANTIS**

Title **SURV. Tech**

Division _____


Headquarters **Bend**

Date **1980**

D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT STAMPED



9

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. _____
 or Agency _____
 PLAT PREPARED OR
 Certified Cor. Record Prepared? Yes No Filed At: Co. SURVEYOR'S OFFICE Date _____

11

REMARKS

Index File No. T. S., R. E., W. M. Tract or Surv. No. Cor.

2359

J-23

12

13

Index
File No. J-25

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or
Survey No. _____
Cor. No. J-25


T 26 S R. 7 E

R.D. Crescent County Klamath Sec. Cor.

Merid. Willamette

N.F. Deschutes State Oregon

CORNER DIAGRAM

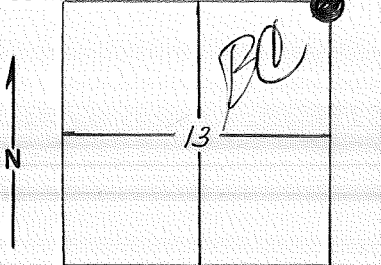

DESCRIBE CORNER MONUMENT FOUND

no post found -

SEE: J-01 T26S R7E

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

possible B.T.

*L.P. pine of 16" dia. has blaze
- white tape attached -*

*BC by
Jim Tye
4/28*

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____

Agency

Signature

Title

Division

Headquarters

Date

7100-52 (3/68)

D-2

USDA-FOREST SERVICE

Index

File No. 2161

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)

Tract or

Survey No.

Cor.

No. L-21

T. 26 S. R. 7

E. R.D. CRESCENT

County KLAMATH

COR. of SEC.

Merid. WILLAMETTE

N.F. DESCHUTES


State OREGON

COR. of SEC.

CORNER DIAGRAM PER LEGEND

DESCRIBE CORNER MONUMENT FOUND

SEARCHED FOR, FOUND NOTHING



DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

Searched for/Not Found

Evidence Found/Accept.

Permanent Monument

Signature

P. DE SANTIS

Title

Surv. Tech

Division

Headquarters

Bend

Date


1980

D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT. DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

MONUMENT SET/RE-SET



9

ACCESSORIES. DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

PLAT PREPARED OR

Certified Cor. Record Prepared? Yes No

Filed At:

Co. SURVEYOR'S OFFICE Date

11

REMARKS

Index File No.

2161

T.

S., R.

E., W.M.

Tract or Surv. No.

Cor.

6-21

12

13

USDA-FOREST SERVICE

Index File No. 2163

CORNER RECORD (SEARCH)

(Ref. FSM 7.151.4)


Tract or Survey No. _____

Cor. No. N-21

T. 26 S. R. 7 E. R.D. CRESCENT County KLAMATH SE Cor. of SEC. 14

Merid. WILLAMETTE N.F. DESCHUTES State OREGON NW Cor. of SEC. 24

CORNER DIAGRAM PER LEGEND

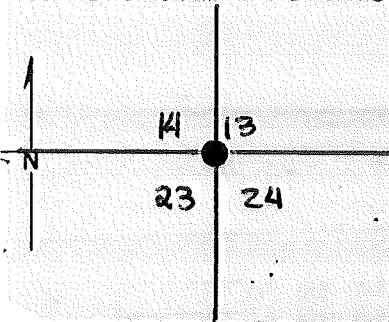

DESCRIBE CORNER MONUMENT FOUND

SEARCHED FOR, NOTHING FOUND

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

STANDING P. PINE	39 ins. dia, brs.	S 24° E	23 3/4 FT	mkd.	(R 7 E S 24)
DEAD L. P.	11 ins. dia, brs.	N 38° E	28 1/2 FT	mkd.	VISIBLE SCRIBING
STANDING P. PINE	33 ins. dia, brs.	N 65° W	25 1/2 FT	mkd.	VISIBLE SCRIBING
STANDING L. P. PINE	11 ins. dia, brs.	S 75° W	38 FT	mkd.	(S 23)

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Corner Legend:

- Searched for/Not Found
- Evidence Found/Accept.
- Permanent Monument

Signature

H.C.H.

Title

R.P.L.S.

Division

S.O.

Headquarters

BEND

Date


4/81

D-7100-52 (3/79)

CORNER RECORD (PERPETUATION)

MONUMENT DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT
 SET 2 1/2" X 30" ALUM. CAPPED, ALUM. PIPE 28" INTO GROUND,

MONUMENT SET/FILED



ACCESSORIES DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE
 AS WITNESS:


A P. PINE,	7	ins. dia, brs.	S 63° E	68 ² FT	mkd.	T26SR7ES24 BT
A W. FIR,	4	ins. dia, brs.	N 20° E	42 ³ FT	mkd.	X BT
A P. PINE,	9	ins. dia, brs.	N 42° W	69 ⁰ FT	mkd.	T26SR7BS4 BT
A L. P.	11	ins. dia, brs.	S 75° W	38 ⁰ FT	mkd.	S 23 (ORIGINAL BT)

Work Done By H.C.H. Title R.P.L.S. Date 4/81 State Registration No. 1898
 or Agency
 Certified Cor. Record Prepared? Yes No Filed At: Co. SURVEYOR'S OFFICE Date

REMARKS

Index File No. N-25 CORNER RECORD (SEARCH) (Ref. FSM 7151.4) Tract or Survey No. _____ Cor. No. N-25
 T 26 S R. 7E - 8E R.D. Crescent County Klamath Sec. Cor-
 Merid. Will N.F. Deschutes State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

None

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Corner destroyed by construction of Rd #2524
 East - West North south lines in
 evidence only.

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency

Signature L. Anderson Title Forest Tech Division _____ Headquarters _____ Date 6/26/70 7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

Index File No. T. R. M. Tract or Surv. No. Cor. **N-25**

12

13

USDA-FOREST SERVICE

Index
File No. P-13

CORNER RECORD (SEARCH)


(Ref. FSM 7151.4)

Tract or Survey No. _____
Cor. No. P-13

T 26 S. R. 7 E. R.D. Crescent County Klamath
1/4 COR.

Merid. WILLAMETTE N.F. DESCHUTES State OREGON

CORNER DIAGRAM

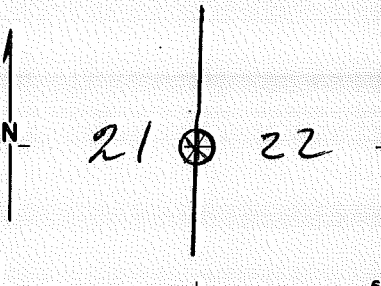

DESCRIBE CORNER MONUMENT FOUND

Rock with no markings

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

B.T. Standing pine 26" scribing visible
B.T. Standing pine 22" scribing grown over.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

1/4 cor. is located in S.W. cor of Rabbit Fir
unit #5 approx. 100' N. of Boundary.


PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature L. Moore Title Forest tech Division _____ Headquarters D-2 Date 9-9-76 D-7100-52 (10/76)

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



MONUMENT
STAMPED

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At _____ Date _____

11

REMARKS


Index File No. T. S., R. E., W.M. Tract or Surv. No. Cor. P-13

12

13

Index
File No. 1767CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)Tract or
Survey No. 977 Cor.
No. R-17T 26 S R. 7 R.D. Crescent County Klamath NW cor
Merid. WMT N.F. Deschutes State Oregon Sec 26

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

SFNF

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature 7

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency 8

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

-10" dia Pine windfall w/face and scribing visible
in SE location.

-Pine stump in NW location

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

150' North of end of Rd #330 in a clearcut


Signature
Walt MillerTitle
PLSDivision
CSHeadquarters
SODate
9/95

FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2 1/2" x 30" BCSP rising 4"
Steel Post 3' west



9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

- 5/8" dia x 30" long rebar driven flush, brs N46°E @ 22.6' w/a 1 1/2" dia AC cap mkd BO S23 PLS 2111 1995
- 3" LPP brs S53°E @ 114.9' mkd X BT
- 22" SP brs. S46°W @ 111.9' mkd T265 R7E S27 BT
- 2" LPP brs N62°W @ 13.1' " X BT

10

Work Done By Walt Miller Title PLS Date 9/95 State Registration No. 2111
or Agency

Certified Cor. Record Prepared? Yes No Filed At: Klanath Co. Date 12/95

11

see plat # 000977 for ^{REMARKS} Details

12

Index File No. T. R. M. Tract or Surv. No. Cor.

1267

26

7

M.

Tract or Surv. No.

-977

Cor.

R-17

13

Index File No. R-21

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or Survey No. _____ Cor. No. R-21

T 26 S. R. 7E


R.D. Crescent County Klamath

Sec. COR.

Merid. Will

N.F. Deschutes State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Live Lodgepole pine, 5" dbh 20' high, Hewn square

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

BT- Live LP 116° 24'9" away
BT- Live LP 333° 13'6" away

Blased lines running E-W, N-S

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____

Agency

Signature

L. Anderson

Title

Forestry Tech

Division

Headquarters

Date

? / 70

7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

12

Index File No. T. R. M. Tract or Surv. No. Cor. **R-21** 13

Index File No. R-25

CORNER RECORD (SEARCH)


(Ref. FSM 7151.4)

Tract or Survey No. _____ Cor. No. R-25

T 26 S R. 7E R.D. Crescent County Klamath Sec Cor

Merid. Will N.F. Deschutes State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Material - Wood stake
 Size - 3" x 3" x 4'
 Height above ground - Rotted down
 Condition - degenerated
 Markings - axe hewn square

Needs perm. monum. 1/2"

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

Bearing tree, live LP	14" DBH	342°	14 ft
Bearing tree, dead LP	8" DBH	51°	31 ft
Bearing tree, live LP	7" DBH	184°	22 ft
Bearing tree, down, dead	10" DBH	251°	12 ft.

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Locate by traveling east for sec board on Rd # 2524 Secs 24 - 25

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

Signature _____ Title _____ Division _____ Headquarters _____ Date _____ 7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____

Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11


REMARKS

Index
 File No. 1769
 T 26 S R. 7 E
 Merid. WMT

CORNER RECORD (SEARCH)
 (Ref. FSM 7151.4)

Tract or
 Survey No. -977 Cor. No. T-17
 County Klamath WA Sec. 26
 N.F. Deschutes State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

10" Dia. LPP snag w/scribing vs. in SW location

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
Agency

Signature
 Walt Miller

Title
 PLS

Division
 CS


Headquarters
 SO

Date
 9/95

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

~~Set 2 1/2" BCSF~~ Set 5/8" x 30" rebar driven flush with
3/4" AC...



9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A PP 18" brs N55°E @ 34.5' mkd 3/4 S26 BT
An AF (Alpine Fir) 4" brs S56°E @ 11.1' mkd X BT
" " " 7" " S14°W @ 28.6' " X BT
" " " 8" " NS4°W @ 17.4' " 1/4 S27 BT

10

Work Done By: Walt Miller Title: PLS Date: 9/95 State Registration No. 2111
or Agency: _____
Certified Cor. Record Prepared? Yes No Filed At: Klamath Co. Date: 12/95

11

REMARKS

12

Index File No. 1769 T. 26 R. 7 M. _____ Tract or Surv. No. -977 Cor. T-17³

Index File No. 1771

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or Survey No. 977 Cor. No. V-71

T 26 S R. 7 E

R.D. Crescent County Klamath NW Cor

Merid. Wmt

N.F. Deschutes State Oregon Sec 35

CORNER DIAGRAM

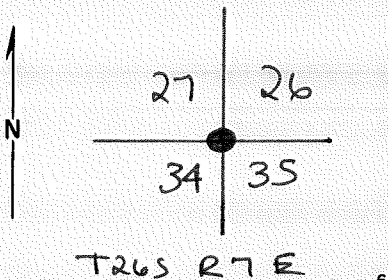


PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____ 7

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____ 8

DESCRIBE CORNER MONUMENT FOUND

SFNF

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

4" LPP brs N53°W @ 6.2' w/overgrown face
 Pine Windfall brs N71°30'E @ 11.1' w/scribing vis.
 " " " S32°E @ 12.1' " " "
 5" Pine Snag " S80°W @ 11.4' w/overgrown face

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

Signature Walt Miller

Title PLS

Division CS


Headquarters SO

Date 19/95

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set 2 1/2" X 30" ACAP rising 2" with fiberglass fence posts 3' North & South.



9

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

6" SP brs N16°E @ 19.3' mkd T26S R7E S26 BT
 5" " " S80°E @ 17.8 " T26S R7E S35 BT

Orig BT, a cut off pine snag, brs S80°W @ 11.4', not re-scribed
 " " , a 4" dia LPP, brs NS3°W @ 6.2', not re-scribed

10

Work Done By Walt Miller Title PLS Date 9/95 State Registration No. 2111
 or Agency
 Certified Cor. Record Prepared? Yes No Filed At: Klanath CO. Date 12/95

11

REMARKS

12

Index File No. 1771 T. 26 R. 7 M. Wnt Tract or Surv. No. -977 Cor. V-71

13

LAND CORNER RECORD


V-21

5680-2

(Rectangular)

1. T 263 R 7E No. V-21 Cor. Sec Mer. 11 State Oregon N. F. Deschutes Dist. Crescent

2. Corner Status



7. Photo Identification

Photo No. _____

Ident. By: _____

8. Plane Coordinate Position Data

State _____ Zone _____

X _____

Y _____

Estab. By _____

Field Book No. _____

Where Filed _____

9. Evaluation

Authentic _____

Needs Verif. _____ Monument _____

Re-estab. _____ Survey _____

Land Status _____

3. Original Description _____ Vol. _____ Page _____ Where Recorded _____

4. Description of Corners: Material - squared tree LP
Size - 8" DBH Height above ground - 3' Condition -
live Markings - axe hewn square wrapped
with orange ribbon.

5. Investigation Notes: Live LP bearing tree 2° 18 ft. Sec 25
Live LP 11" DBH bearing tree 304° and 27 ft.
from corner in Sec 26 old blazes of sec
line running E/W and N/S. Note sec board
on Rd 2631 and line of Secs 35 and 36
located wrong. True line comes thru
approx chns west of present board.
Marked with tag on line tree. Locate
by traveling north on true line from
Rd 2631. Needs permanent monument.

6. Signed L. Andersson Title Forest Tech Date 6/26/70

PERPETUATION RECORD

10. Monument:

11. Accessories

		Field Book _____	Page _____
12. Set By _____ Title _____		13. Recorded By _____	Volume _____ Page _____
License _____ Agency _____ Date _____		(Agency)	
		(Date) _____ (City) _____	(County) _____ (State) _____

14. Remarks:

Index File No. V-25

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or Survey No. _____ Cor. No. V-25


T 265 R. 7E-~~8E~~

R.D. Crescent County Klamath Sec Cor

Merid. Hill

N.F. Heschutes State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

MATERIAL - LIVE LP TREE SIZE - 13" DBH
HEIGHT ABOVE GROUND - 4' CONDITION - LIVE

MARKINGS - AXE HEWN SQUARE TREE WRAPPED WITH ORANGE RIBBON
NEEDS PERMANENT MONUMENT

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

BEARING TREE 117° 36' E, LIVE LP 18" DBH INSCRIBED. BEARING TREE 11° 31' E LIVE PP 24" DBH.

1. P. PINE, STANDING - SCRIBES HEALED OVER
2. TRANSPORTED LOG W/ VLS. SCRIBING
BOTH MARKED W/ BLUE PAINT "BT"

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

LOCATE BY TRAVELING EAST ON GOOD BLASE LINE FROM
SEC BOARD ON RD # 2524

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____

Agency

Signature HCH

L. Anderson

Title S. T.

Forest Tech

Division _____

Headquarters S.O.

Date 11/79

6/26/70

7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

9

ACCESSORIES : DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

10

Work Done By _____ Title _____ Date _____ State Registration No. or Agency _____
Certified Cor. Record Prepared ? Yes No Filed At: _____ Date _____

11

REMARKS

12

Index File No.

T.

R.

M.

Tract or Surv. No.

Cor.

V-25

13

USDA-FOREST SERVICE

Index
File No. 1773

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or
Survey No. _____

Cor.
No. X-17

T 26 S R. 7 E

R.D. Crescent


County Klamath

W/4 Sec. 35

Merid. _____

N.F. _____ State _____

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

FOUND:

No evidence of original post. Set corner from BT's. From position determined:
A Lpp 8"dia., S.75½°W. 10 lks. with scribing exposed.
A Lpp snag, cut off 6ft. high, S.80°E. 20 lks. with scribing exposed.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____

X _____

Y _____

Estab. By _____

Agency

Signature

William B. Ham

Title

Pls

Division

es

Headquarters

SO


Date

10/11

FS-7100-52 (3/68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



SET:

AC A 2½" dia. X 30" long steel pipe surmounted by a 2½" dia. brass cap, rising 8". Penny at base of pipe. Steel fence post 3 ft. North.
 A Lpp. 5" dia., N.30½°E., 10.2 ft., mkd. X BT.
 A Lpp. 6" dia. snag, S.80°E., 13.2 ft., Original BT, not re-marked.
 A Lpp. 8" dia., S.75½°W., 6.6 ft., Original BT, not re-marked.
 A Lpp. 4" dia., N.39°W., 11.6 ft., mkd. X BT.

ATTACHING EVIDENCE

A brass washer mkd. LS 2396 nailed between the B & T of the scribing. All bearings based on a solar observation. All distances taken to the side center of the tree at the root crown. Location tag on road, 500 ft. S

Work Done By William B. Ham Title PLS Date 10/94 State Registration No. 2396
 or Agency _____
 Certified Cor. Record Prepared? No Filed At: Klamath Co. Date 10/28/94

REMARKS

HISTORY OF ORIGINAL CORNER AND/OR PREVIOUS RENEWALS:

Survey of 1868 by David P. Thompson
 GLO Record - Set 1/4 Sec. post from which
 A Pine 4 in diam bears S65°W 10 lks dist
 A " " " " S80°E 20 lks dist

Index File No. T. R. M. Tract or Surv. No. Cor. 12

1773

GPO: 1986 O-439-095

X-17 13

Index
File No. _____


CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)

Tract or
Survey No. 977 Cor. No. Xa-17

T 26 S R. 7 E R.D. Crescent County Klamath 384± South of

Merid. W.M.T. N.F. Deschutes State Oregon X-17

CORNER DIAGRAM

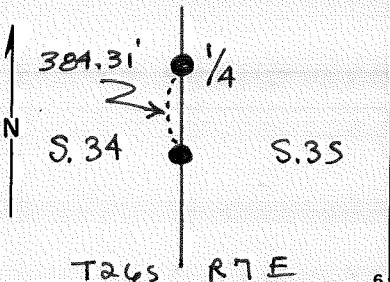

DESCRIBE CORNER MONUMENT FOUND

NOT ORIG. SET.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

NOT ORIG. SET

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency

Signature
Walt Miller

Title
PLS

Division
CS


Headquarters
SO

Date
9/95

CORNER RECORD (PERPETUATION)

MONUMENT : DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set ACAP Rising 6" 200' North of Rd 5840.



9

ACCESSORIES : DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

8" SP brs S50°W @ 14.5' mkd X BT

12" Hemlock brs N 86°W @ 10.0' mkd OCRA AP 1583 BT

10

Work Done By. Walt Muller Title PLS Date 9/95 State Registration No. 2111 or Agency

Certified Cor. Record Prepared? Yes No Filed At: Klamath Co. Date 12/95

11

REMARKS

12

Index File No. T. 26 R. 7 M. Tract or Surv. No. -977 Cor. Xa-17

USDA-FOREST SERVICE

Index
File No. 1775

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

Tract or
Survey No. _____

Cor.
No. Z-17

T 26 S R. 7 E

R.D. Crescent County Klamath

~~NW Cor Sec 2~~


Merid. W MT

N.F. Deschutes State Oregon

SW Cor Sec 35

CORNER DIAGRAM

DESCRIBE CORNER MONUMENT FOUND

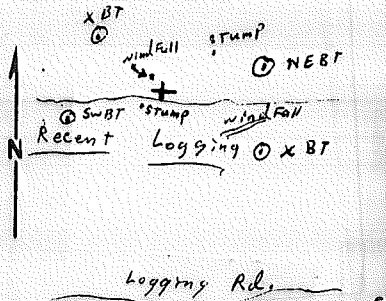

FOUND:

Original post hole with rotted remains of post.
 A lpp. windfall, 6" dia. N.65°W. 2.7ft (41ks) with scribing exposed.
 A lpp. stump, 8" dia., N.75°E., 15.8ft. (24 lks), no other evidence.
 A lpp. windfall 3" dia. in SE BT location, moved by logging activity.
 A lpp. stump, S.10°W., 5.5ft. (8 lks), no other evidence.

PHOTO IDENTIFICATION DATA

Photo No. _____
 Filed At. _____
 Object Ident. _____
 Ident. By _____
 Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

PLANE COORDINATE POSITION DATA

State _____ Zone _____
 X _____
 Y _____
 Estab. By _____
 Agency _____

Signature

Title

Division

Headquarters

Date

FS-7100-52 (3/68)

William B. Ham

PLS


CS

SO

10/94

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT



SET:

- A 2½"dia. X 30" long alum. pipe surmounted by a 2½"dia. alum. cap, rising 4". A penny at base of pipe. A steel fence post 3ft. North.
- A Lpp. 10"dia., N.80°E., 23.9ft., mkd. T26S R7E S35 BT
- A Lpp. 5"dia., S.71°E., 23.7ft., mkd. X BT
- A Lpp. 9"dia., S.83°W., 7.0ft., mkd. T27S R7E S3 BT
- A Lpp. 5"dia., N.44°W., 25.5ft., mkd. X BT

E EXISTING EVIDENCE

Bearings to center of tree by hand compass. Mag. Dec. = 19°E. Distances to side center at the root crown. A brass washer mkd. LS 2396 nailed between the B & T of the scribing.
Lpp. = Lodgepole Pine

10

Work Done By William B. Harttille PLS Date 10/94 State Registration No. 2396
or Agency

Certified Cor. Record Prepared ? Yes No Filed At: Klamath Co. Date 10/28/94

11

REMARKS

Survey of 1868 by David P. Thompson.
GLO Record - Set post for corner to secs 2,3,34 & 35
A Pine 4 in diam bears N68°W 6 lks dist
A " 5 " " " N65°E 25 " "
A " 4 " " " S68°E 20 " "
A " 4 " " " S12°W 7 " "

12

Index File No. 1775 T. R. M. Tract or Surv. No. Cor.

13